

---

# COVARIANCE-FREE MULTIFIDELITY CONTROL VARIATES IMPORTANCE SAMPLING FOR RELIABILITY ANALYSIS OF RARE EVENTS

---

**Promit Chakroborty**  
Department of Civil and Systems Engineering  
Johns Hopkins University  
Baltimore, MD 21218  
pchakro1@jhu.edu

**Somayajulu L.N. Dhulipala**  
Idaho National Laboratory  
Idaho Falls, ID 83415  
Som.Dhulipala@inl.gov

**Michael D. Shields**  
Department of Civil and Systems Engineering  
Johns Hopkins University  
Baltimore, MD 21218  
michael.shields@jhu.edu

May 8, 2024

## ABSTRACT

Multifidelity modeling has been steadily gaining attention as a tool to address the problem of exorbitant model evaluation costs that makes the estimation of failure probabilities a significant computational challenge for complex real-world problems, particularly when failure is a rare event. To implement multifidelity modeling, estimators that efficiently combine information from multiple models/sources are necessary. In past works, the variance reduction techniques of Control Variates (CV) and Importance Sampling (IS) have been leveraged for this task. In this paper, we present the CVIS framework; a creative take on a coupled Control Variates and Importance Sampling estimator for bifidelity reliability analysis. The framework addresses some of the practical challenges of the CV method by using an estimator for the control variate mean and side-stepping the need to estimate the covariance between the original estimator and the control variate through a clever choice for the tuning constant. The task of selecting an efficient IS distribution is also considered, with a view towards maximally leveraging the bifidelity structure and maintaining expressivity. Additionally, a diagnostic is provided that indicates both the efficiency of the algorithm as well as the relative predictive quality of the models utilized. Finally, the behavior and performance of the framework is explored through analytical and numerical examples.

## 1 Introduction

Understanding the performance of a system is an essential component of analysis and design within nearly all fields of engineering. Reliability Analysis is one way to do so, and its primary task is to estimate the probability of failure ( $P_F$ ) associated with the system under certain known or estimated input uncertainties. We represent these uncertainties by input random variables, which are collected in the random vector  $\mathbf{X}$  defined on the probability space  $(\Omega, \mathcal{F}, \mathcal{P})$ , with sample space  $\Omega$ ,  $\sigma$ -field  $\mathcal{F}$ , and probability measure  $\mathcal{P}$ . Further,  $\mathbf{x}$  is defined as a specific realization of this input random vector.

Theoretically,  $P_F$  is defined in terms of the response function  $g(\mathbf{x})$  of the system (a scalar-valued function used to judge the performance of the system), as

$$P_F = \int_{\{\mathbf{x}: g(\mathbf{x}) \leq 0, \mathbf{x} \in \Omega\}} f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x} \quad (1)$$

where failure is defined to occur when  $g(\mathbf{x}) \leq 0$ , and  $f_{\mathbf{X}}(\mathbf{x})$  is the joint probability density function of the random vector  $\mathbf{X}$ . This integral can be simplified by defining the failure (or limit-state) indicator function  $I_F(\mathbf{x})$ , which takes a value of 1 whenever  $\mathbf{x}$  corresponds to system failure (i.e.,  $g(\mathbf{x}) \leq 0$ ) and a value of 0 otherwise. Thus,

$$P_F = \int_{\Omega} I_F(\mathbf{x}) f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x} = \mathbb{E}_f [I_F(\mathbf{x})] \quad (2)$$

where  $\mathbb{E}_f [\cdot]$  is the expectation operator with respect to  $f_{\mathbf{X}}(\mathbf{x})$ .

For all except the simplest problems, this integral is analytically intractable due to a combination of dimensionality, form of the input distribution, and complexity of the failure indicator function. Instead, simulation-based methods such as Monte Carlo Simulation are used, whereby  $I_F(\mathbf{x})$  is evaluated on a set of samples,  $\mathbf{x}_i$ , generated from  $f_{\mathbf{X}}(\mathbf{x})$ , and these values are used to statistically estimate  $P_F$ . The simplest such estimator, henceforth referred to as the crude Monte Carlo (CMC) estimator, is expressed as follows

$$\hat{P}_F = \frac{1}{N} \sum_{i=1}^N I_F(\mathbf{x}_i) \quad (3)$$

where  $N$  is the total number of samples generated. Unfortunately, the coefficient of variation of  $\hat{P}_F$ ,  $\text{CoV} [\hat{P}_F]$ , is  $O(1/\sqrt{N})$ ; thus, even a modest improvement in the confidence of the estimate requires a significant increase in the sample size  $N$ . Additionally,  $\text{CoV} [\hat{P}_F] \propto 1/P_F$ , and since for most real-world systems failure is a rare event, this further increases the sample size requirement for confident estimation. This issue is exacerbated by the fact that for most complex real-world systems,  $g(\mathbf{x})$  is defined implicitly and is highly computationally expensive to evaluate. Altogether, these factors make the CMC estimator infeasible in practice. Thus, the problem of improving the computational efficiency of reliability analysis has received extensive attention in the literature.

## 1.1 A Brief Review of Reliability Methods

One way to improve the efficiency of reliability analysis is to use variance reduction methods, which reduce the total sample size requirement by creating estimators that have a lower variance than the CMC estimator [1]. Two such methods, namely Control Variates (CV) and Importance Sampling (IS), underpin the method proposed in this paper. Importance Sampling, in particular, has been widely used in the field of reliability analysis [2, 3, 4, 5, 6]. Furthermore, many of the most efficient variance reduction-based reliability analysis algorithms belong to a broad class of variance reduction methods where sample points are pushed toward the failure region in a sequence of sampling steps. This general class includes methods such as subset simulation, sequential importance sampling, and tempering methods, among others [7, 8, 9, 10].

Another popular solution to reduce the computational expense associated with CMC is to construct fast-running surrogate models for the response function, which can be used in place of  $g(\mathbf{x})$  (and hence  $I_F(\mathbf{x})$ ) in the failure probability estimator. A wide variety of methods are used to create such surrogates for use in reliability analysis, such as Neural Networks [11, 12, 13], Polynomial Chaos Expansions [14, 15], and Gaussian Process Regression [16, 17]. In addition, many methods utilize these surrogate models in conjunction with variance reduction techniques or other estimators designed for efficient reliability analysis [18, 19, 20, 21, 22]. However, the predictive accuracy and/or convergence rate of many of the surrogate modeling approaches are highly dependent on the smoothness, complexity, and/or dimensionality of the function they approximate.

An alternative way to reduce the cost of model evaluations is through multifidelity modeling, which incorporates system response information from multiple models/sources. Peherstorfer et al. [23] classify multifidelity methods into three broad categories: adaptation, filtering, and fusion. *Adaptation* involves using information from the more accurate but more expensive High Fidelity (HF) model to enhance the quality of the response predictions made by the comparatively less accurate but cheaper Low Fidelity (LF) models within the runtime of the algorithm. Many active-learning methods use adaptation strategies to learn surrogate model-based corrections to the LF model [24, 25, 26]. (In this context, a surrogate model may also be considered a LF model.) *Filtering* is the idea of using LF information as a guide for where the HF model needs to be invoked, such as evaluating the HF model at sample points where the LF model passes or fails a certain criterion [24, 27], or using a large set of LF evaluations to direct Importance Sampling on the HF model [28].

Finally, *fusion* combines information from all models together. Most multifidelity Control Variates methods such as multilevel Monte Carlo (MLMC) [29, 30], multi-index Monte Carlo (MIMC) [31], and multifidelity Monte Carlo (MFMC) [32] fall under this category. The Approximate Control Variates (ACV) framework, proposed by Gorodetsky et al. [33], was shown to generalize most of these CV-based methods.

Recently, some attention has also been given to the idea of further accelerating Reliability Analysis algorithms by combining the concepts of Control Variates and Importance Sampling within a multifidelity setting [34, 35, 36].

## 1.2 Goals and Contributions of the Proposed Method

The method proposed in this paper approaches the idea of combining Control Variates and Importance Sampling from a new angle. Rather than focusing purely on optimal variance reduction, the approach emphasizes practical benefits in implementation and interpretability while still achieving significant improvements in efficiency. The resultant contribution is the Control Variates - Importance Sampling (CVIS) estimator, which leverages one high-fidelity and one low-fidelity model to predict failure probabilities associated with rare events. A novel CVIS algorithm is presented, providing users with a simple and robust way to compute the CVIS estimator. In addition to significantly improving the efficiency of estimating small failure probabilities compared to crude Monte Carlo and providing comparable efficiency to existing multi-fidelity CV and IS-based methods, our framework has the following benefits:

- It leverages the bifidelity structure of the models to construct an importance sampling density (ISD) that retains expressivity by not assuming an underlying form of the distribution.
- It bypasses practical challenges such as the need to estimate the covariance between the models or the normalizing constant of the ISD.
- A diagnostic is provided, at no additional cost, that can indicate when variance reduction is not being achieved in practice.
- A closed-form variance estimator is presented that incorporates all aspects of uncertainty in the failure probability estimate in an easily separable form.

## 2 Preliminaries

In this section, we first describe the bifidelity reliability analysis problem setting and define some basic notation. Then, we briefly describe the two variance reduction techniques we primarily use in our proposed framework - Importance Sampling and Control Variates.

### 2.1 Basic Notation for our Bifidelity Reliability Problem

We consider two models; one high-fidelity (HF) model, which is considered highly accurate and complete but computationally expensive, and one low-fidelity (LF) model, which is cheaper but less accurate. The two models are characterized by the same vector of input random variables, denoted by  $\mathbf{X}$ , defined on the same probability space  $(\Omega, \mathcal{F}, \mathcal{P})$ . We define the response function for each model and, hence, the corresponding failure indicator function. For the HF model, we define  $H(\mathbf{x}) : \Omega \mapsto \mathbb{R}$  such that the corresponding indicator function is defined as

$$I_H(\mathbf{x}) = \begin{cases} 1 & H(\mathbf{x}) \leq 0 \text{ i.e., failure} \\ 0 & H(\mathbf{x}) > 0 \text{ i.e., safety} \end{cases} \quad (4)$$

Similarly, we define the LF model response function as  $L(\mathbf{x}) : \Omega \mapsto \mathbb{R}$ , and the corresponding indicator function is as

$$I_L(\mathbf{x}) = \begin{cases} 1 & L(\mathbf{x}) \leq 0 \text{ i.e., failure} \\ 0 & L(\mathbf{x}) > 0 \text{ i.e., safety} \end{cases} \quad (5)$$

The failure probability for the system predicted by each model is the mean value of the corresponding indicator functions (each equivalent to Eq. (2)), where  $\mathbf{X}$  follows the distribution  $f_{\mathbf{X}}(\mathbf{x})$ . We are specifically interested in estimating the HF failure probability. Thus

$$\text{The HF model failure probability: } P_F = \mathbb{E}_f [I_H(\mathbf{X})] \quad (6)$$

$$\text{The LF model failure probability: } P_{F_L} = \mathbb{E}_f [I_L(\mathbf{X})] \quad (7)$$

## 2.2 Importance Sampling (IS)

In Importance Sampling, variance reduction is achieved by drawing samples from an alternate density, called the Importance Sampling Density (ISD), and weighting their influence in the constructed IS estimator according to the ratio of the densities of the original distribution to the ISD. The ISD is constructed such that most of its density lies in the ‘‘important’’ region of the function of interest. In the specific case of reliability analysis, where we aim to estimate  $P_F$  (Eq. (6)), a ‘‘good’’ ISD would have most of its density covering the region where  $I_H(\mathbf{x}) = 1$ . If the ISD is  $q_{\mathbf{X}}(\mathbf{x})$ , then IS redefines  $P_F$  as

$$P_F = \mathbb{E}_q \left[ I_H(\mathbf{X}) \frac{f_{\mathbf{X}}(\mathbf{X})}{q_{\mathbf{X}}(\mathbf{X})} \right] \quad (8)$$

where now  $\mathbf{X} \sim q_{\mathbf{X}}(\mathbf{x})$  and so we take the expectation with respect to the ISD. The resultant estimator is given by

$$\hat{P}_{F_{IS}} = \frac{1}{N} \sum_{i=1}^N \left[ I_H(\mathbf{x}_i) \frac{f_{\mathbf{X}}(\mathbf{x}_i)}{q_{\mathbf{X}}(\mathbf{x}_i)} \right] \quad (9)$$

where  $N$  is the total number of samples, and each  $\mathbf{x}_i$  is drawn from  $q_{\mathbf{X}}(\mathbf{x})$ . Note that the IS estimator in Eq. (9) is only unbiased when  $\text{supp}(q_{\mathbf{X}}(\mathbf{x})) \supseteq \text{supp}(I_H(\mathbf{x})f_{\mathbf{X}}(\mathbf{x}))$  [37, 1], where  $\text{supp}(q_{\mathbf{X}}(\mathbf{x})) = \{\mathbf{x} \in \Omega : q_{\mathbf{X}}(\mathbf{x}) > 0\}$  denotes the support of the distribution  $q_{\mathbf{X}}(\mathbf{x})$ .

It can be shown that the variance of the resultant estimator  $\hat{P}_{F_{IS}}$  is minimum when the ISD takes the following optimal form:

$$q_{\mathbf{X}}^*(\mathbf{x}) \propto I_H(\mathbf{x})f_{\mathbf{X}}(\mathbf{x}) \quad (10)$$

Tabandeh et al. [38] classify IS for reliability analysis into two broad groups: (a) Density approximation methods, which approximate  $q_{\mathbf{X}}^*(\mathbf{x})$  using a specific member of a chosen family of distributions, and (b) Limit-state approximation methods, which utilize an approximation of the limit-state function to substitute for  $I_H(\mathbf{x})$  in Eq. (10).

## 2.3 Control Variates (CV)

Classical Control Variates is a technique used to improve the accuracy of statistical estimates of a primary quantity of interest by making use of its correlation with some secondary quantity, called the control variate. For mean value estimation with CV, a set of samples (say  $\bar{\mathbf{z}}$ ) is generated from the input distribution of the problem (say  $f_Z(z)$ ). Then, both the primary quantity of interest (say  $U$ ) and the control variate (say  $V$ ) are evaluated for each sample. By doing so, we can achieve some estimate of the mean of both  $U$  and  $V$ , as  $\hat{U}(\bar{\mathbf{z}})$  and  $\hat{V}(\bar{\mathbf{z}})$ , respectively. Additionally, in classical CV, the true mean of the control variate is also assumed to be known (say  $\mu_V$ ). Then, the classical CV estimate of the mean of  $U$  is constructed as

$$\hat{\mu}_{U,CV}(\bar{\mathbf{z}}) = \hat{U}(\bar{\mathbf{z}}) + \alpha \left( \hat{V}(\bar{\mathbf{z}}) - \mu_V \right) \quad (11)$$

where  $\alpha$  is a scalar tuning constant. Depending on the correlation between  $\hat{U}(\bar{\mathbf{z}})$  and  $\hat{V}(\bar{\mathbf{z}})$  and the chosen value of  $\alpha$ , the variance of  $\hat{\mu}_{U,CV}(\bar{\mathbf{z}})$  can be much lower than the variance of  $\hat{U}(\bar{\mathbf{z}})$ .

For our case of bifidelity reliability analysis, the quantity of interest is  $I_H(\mathbf{x})$  (Eq. (4)), and the natural choice of the control variate is  $I_L(\mathbf{x})$  (Eq. (5)). Thus, for bifidelity reliability where  $\mathbb{E}[I_L(\mathbf{X})] = P_{F_L}$ , the classical CV estimator takes the form

$$\hat{P}_{F_{CV}} = \hat{Q} + \alpha \left( \hat{Q}_L - P_{F_L} \right) \quad (12)$$

where  $\hat{Q} = \sum_{i=1}^N (I_H(\mathbf{x}_i)/N)$  and  $\hat{Q}_L = \sum_{i=1}^N (I_L(\mathbf{x}_i)/N)$  are typically the CMC estimators of  $\mathbb{E}[I_H(\mathbf{X})]$  and  $\mathbb{E}[I_L(\mathbf{X})]$  respectively (with the explicit dependence on the samples dropped for simplicity of notation), evaluated on the same set of samples  $\{\mathbf{x}_i\}$  drawn from the input distribution  $f_{\mathbf{X}}(\mathbf{x})$ . (In general  $\hat{Q}$  and  $\hat{Q}_L$  can be any estimators of  $\mathbb{E}[I_H(\mathbf{X})]$  and  $\mathbb{E}[I_L(\mathbf{X})]$ ).  $N$  is the total number of samples generated. The challenge with the classical CV formulation is that  $\mathbb{E}[I_L(\mathbf{X})] = P_{F_L}$  is rarely known exactly.

The Approximate Control Variates (ACV) framework was introduced by Gorodetsky et al. [33] for the more practical situation when the control variate mean is unknown. In this case, it must also be estimated, and thus the ACV estimator becomes

$$\hat{P}_{F_{ACV}} = \hat{Q} + \alpha \left( \hat{Q}_L - \hat{P}_{F_L} \right) = \hat{Q} + \alpha \Delta_L \quad (13)$$

where  $\Delta_L = \left( \hat{Q}_L - \hat{P}_{F_L} \right)$ , and  $\hat{P}_{F_L}$  is some estimator of the low-fidelity failure probability that is different from  $\hat{Q}_L$ , in either form or sample set. Note that this makes  $\Delta_L$  a random variable as well.

They further show that the variance of this estimator is minimized for the following optimal choice of  $\alpha$ , given by

$$\alpha^* = -\frac{\text{Cov}[\Delta_L, \hat{Q}]}{\text{Var}[\Delta_L]} \quad (14)$$

The terms in Eq. (14) are rarely known a priori. The most natural solution to this problem is to estimate these terms as well, as explored by Pham & Gorodetsky [35]. However, their method requires the generation of an ensemble of the estimators  $\hat{Q}$ ,  $\hat{Q}_L$ , and  $\hat{P}_{FL}$ , i.e., they estimate sample-statistics of the  $\hat{Q}$ ,  $\hat{Q}_L$ , and  $\hat{P}_{FL}$  estimators by generating multiple realizations of each. This requires considerable computational effort or the use of multiple small batches of samples for each realization of the estimators. Thus, we see that implementing a CV estimator requires knowledge of the covariance between the estimators of the statistics of the HF and LF models, which is almost certainly unavailable exactly and is very tricky to estimate.

### 3 Proposed Methodology: The Control Variates - Importance Sampling (CVIS) Estimator

In the proposed approach, we utilize the ACV formulation with an alternate choice of  $\alpha$  that circumvents the need to know or estimate the inter-model covariances. Rearranging the terms from Eq. (13) (and flipping the sign of  $\alpha$ ), the general ACV estimator can be expressed

$$\hat{P}_{FCV} = \alpha \hat{P}_{FL} + [\hat{Q} - \alpha \hat{Q}_L] \quad (15)$$

Henceforth, we use the subscript ‘‘CV’’ to denote all variations of the ACV estimator (the generic version of which was defined as  $\hat{P}_{FACV}$  in Eq. (13)); this is done both for simplicity of notation and to acknowledge that it is the ACV formulation that is used in practice, as the classical Control Variates formulation is almost never applicable.

This estimator behaves differently depending on the estimators used for  $\hat{Q}$ ,  $\hat{Q}_L$ , and  $\hat{P}_{FL}$ . We define two versions of this estimator that will be useful to us (particularly in Section 3.1.2) based on different formulations of  $\hat{Q}$  and  $\hat{Q}_L$ ; in both cases,  $\hat{P}_{FL}$  can be chosen freely. The first case (the Control Variates Monte Carlo, CVMC estimator) uses CV as the lone variance reduction method; CMC estimators are used for  $\hat{Q}$  and  $\hat{Q}_L$ , i.e.,  $\hat{Q} = \hat{Q}_{MC} = \sum_{i=1}^N (I_H(\mathbf{x}_i)/N)$  and  $\hat{Q}_L = \hat{Q}_{LMC} = \sum_{i=1}^N (I_L(\mathbf{x}_i)/N)$ , with each  $\mathbf{x}_i$  drawn from  $f_{\mathbf{X}}(\mathbf{x})$ , leading to

$$\hat{P}_{FCVMC} = \alpha \hat{P}_{FL} + [\hat{Q}_{MC} - \alpha \hat{Q}_{LMC}] \quad (16)$$

The second case combines IS with CV; IS estimators are used for  $\hat{Q}$  and  $\hat{Q}_L$ , i.e.,  $\hat{Q} = \hat{Q}_{IS} = \sum_{i=1}^N (I_H(\mathbf{x}_i) f_{\mathbf{X}}(\mathbf{x}_i) / N q_{\mathbf{X}}(\mathbf{x}_i))$  and  $\hat{Q}_L = \hat{Q}_{LIS} = \sum_{i=1}^N (I_L(\mathbf{x}_i) f_{\mathbf{X}}(\mathbf{x}_i) / N q_{\mathbf{X}}(\mathbf{x}_i))$ , with each  $\mathbf{x}_i$  drawn from some ISD  $q_{\mathbf{X}}(\mathbf{x})$ , giving us the most general version of the CVIS estimator as

$$\hat{P}_{FCVIS} = \alpha \hat{P}_{FL} + [\hat{Q}_{IS} - \alpha \hat{Q}_{LIS}] \quad (17)$$

Next, instead of computing the optimal value  $\alpha^*$  as in Eq. (14), we choose  $\hat{\alpha}$  as the value that makes the second term in Eq. (15) zero. Therefore,

$$\hat{\alpha} = \frac{\hat{Q}}{\hat{Q}_L} \quad (18)$$

and our proposed ‘‘simple’’ (as opposed to optimal) ACV (SACV) estimator takes the form

$$\hat{P}_{FSACV} = \hat{\alpha} \hat{P}_{FL} \quad (19)$$

Note that we use the notation  $\hat{\alpha}$  to signify that our choice of  $\alpha$  is itself an estimate as it relies on estimated values; therefore, it is a random variable and not a constant. If the estimators on the right-hand-side of Eq. (18) were replaced with their limiting values (as the number of samples goes to infinity), we would get the limiting value of this choice of  $\alpha$  as

$$\alpha^\dagger = \frac{P_F}{P_{FL}} \quad (20)$$

This choice of alpha (from Eq. (18)) can be applied to both Eq. (16) and Eq. (17) to construct  $\hat{P}_{FSCVMC}$  and  $\hat{P}_{FSCVIS}$ , respectively.

Our proposed CVIS framework is a special case of the general  $\hat{P}_{F_{SCVIS}}$  estimator when a particular ISD is used as described below. Thus, the proposed CVIS estimator (simply referred to as the CVIS estimator henceforth) can be represented as

$$\tilde{P}_{F_{CVIS}} = \tilde{P}_F = \tilde{\alpha} \tilde{P}_{F_L} \quad (21)$$

$$\tilde{\alpha} = \frac{\tilde{Q}}{\tilde{Q}_L} \quad (22)$$

Note that here, and for the remainder of the document, we notationally replace the  $\hat{\cdot}$  with a  $\tilde{\cdot}$  to distinguish the proposed estimators from those of previous works. (Additionally,  $\tilde{\alpha}$  is henceforth referred to as the CVIS constant.)

The CVIS framework uses IS for  $\tilde{Q}$  (and  $\tilde{Q}_L$  by extension, as both must use the same set of samples, as per Section 2.3) to focus the samples around the failure region and improve the overall efficiency of the method. This is because, although the SCVMC formulation does result in some theoretical variance reduction, the practical issue of generating a statistically sufficient number of failure samples in a rare-event simulation problem remains, as mentioned in Section 2.2. Any efficient, unbiased estimator of  $P_{F_L}$  is acceptable for  $\tilde{P}_{F_L}$ .

The specific choice of ISD exploits the bifidelity structure once again by applying the limit-state approximation concept (as defined in Section 2.2). This is done by replacing  $I_H(\mathbf{x})$  in Eq. (10) with a logistic approximation of  $I_L(\mathbf{x})$  given by

$$S_L(\mathbf{x}, \beta) = \frac{1}{1 + \exp(\beta L(\mathbf{x}))} \quad (23)$$

where  $\beta$  is a tuning parameter such that  $\lim_{\beta \rightarrow 0} S_L(\mathbf{x}, \beta) = 0.5$  and  $\lim_{\beta \rightarrow \infty} S_L(\mathbf{x}, \beta) \approx I_L(\mathbf{x}) \forall \mathbf{x} \in \Omega$ . The resulting ISD is

$$\mathbf{q}_{\mathbf{x}}(\mathbf{x}, \beta) = \frac{S_L(\mathbf{x}, \beta) f_{\mathbf{x}}(\mathbf{x})}{C_S} \quad (24)$$

where  $C_S = \int_{\Omega} \mathbf{q}_{\mathbf{x}}(\mathbf{x}, \beta) d\mathbf{x}$  is the normalizing constant. Finally, from Eq. (9) and after some simplifications, for a set of samples  $\{\mathbf{x}_i\}$  drawn from  $\mathbf{q}_{\mathbf{x}}(\mathbf{x}, \beta)$ , we get

$$\tilde{Q} = \frac{C_S}{N} \sum_{i=1}^N \left[ \frac{I_H(\mathbf{x}_i)}{S_L(\mathbf{x}_i, \beta)} \right] \quad (25)$$

$$\tilde{Q}_L = \frac{C_S}{N} \sum_{i=1}^N \left[ \frac{I_L(\mathbf{x}_i)}{S_L(\mathbf{x}_i, \beta)} \right] \quad (26)$$

Note that due to the form of  $\tilde{\alpha}$  (Eq. (18)), the normalizing constant  $C_S$  cancels out. Thus, it is of practical use to define  $\tilde{Q} = \tilde{Q}/C_S$  and  $\tilde{Q}_L = \tilde{Q}_L/C_S$ , such that

$$\tilde{\alpha} = \frac{\tilde{Q}}{\tilde{Q}_L} \quad (27)$$

The assembled collection of Eqs. (21), (22), (25), and (26) together form the proposed CVIS estimator. In the special case where the HF failure region is a subset of the LF failure region, the CVIS estimator reduces to a simpler form, presented in Appendix C.

### 3.1 Stability and Diagnostic

In this section, we first present a stipulation that the chosen pair of HF and LF models must satisfy in order for the proposed IS estimators  $\tilde{Q}$  and  $\tilde{Q}_L$  to be stable and well-defined. We also discuss how the stipulation allows for the definition of a “well-tuned” ISD. Then, we provide a few guarantees to the performance of the proposed method and present a diagnostic that is available for no additional model evaluations. Finally, we make some observations about the relative influence of the CV formulation and the chosen IS estimators on the variance reduction achieved by the CVIS methodology.

#### 3.1.1 Model Relationship Requirements

The CVIS estimator, as presented above, is not stable for all possible pairs of HF and LF models. This is primarily because of how IS is implemented. For  $\mathbf{q}_{\mathbf{x}}(\mathbf{x}, \beta)$  to function as a “good” ISD,  $S_L(\mathbf{x}, \beta)$  has to approximate  $I_H(\mathbf{x})$  reasonably well; however, if the LF model itself is poor at predicting failure, then this is not possible.



1. There exists a finite positive  $\beta$  such that  $S_L(\mathbf{x}, \beta) = \varepsilon$ .
2. If any two of the variables in the tuple  $(\beta, \delta, \varepsilon)$  are specified, then the third variable is determined uniquely.

The proof follows directly from the definition of the Logistic function. From this statement, we can assert the following

**Corollary 1** *It is always possible to find a  $\beta$  (which uniquely defines the curve  $S_L(\mathbf{x}, \beta)$ ) such that the resultant  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta) \geq \xi C_S^{-1} f_\mathbf{x}(\mathbf{x}) \forall \mathbf{x} \in \Omega_\mathcal{L}$ , where  $\xi$  is a constant that can be chosen arbitrarily in the range  $0 < \xi < 0.5$ .*

In practice, the constant  $\xi$  is chosen to ensure that the ISD has enough weight in all regions of  $\Omega_\mathcal{L}$  (and by extension  $\Omega_\mathcal{F}$ ) for the resultant IS estimators to be unbiased and well-defined when implemented.

So far, we have made no comments about what happens if  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta)$  has significant weight outside of  $\Omega_\mathcal{F}$ , i.e.  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta) > 0 \forall \mathbf{x} \in \Omega_\varrho$ , where  $\Omega_\varrho \subseteq \Omega_\mathcal{F}^c$ . Clearly from Eq. (10) this is undesirable; our ISD is formed by approximating  $I_H(\mathbf{x})$  using  $S_L(\mathbf{x}, \beta)$  as per the limit-state approximation concept defined in Section 2.2. However, this is not a fatal issue. The efficiency of IS decreases as more and more weight is spread in the safe-predicted regions of the HF model, but the estimator remains unbiased as long as  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta) > 0 \forall \mathbf{x} \in \Omega_\mathcal{F}$ . Moreover, based on our definitions and stipulations, we can ensure that our ISD remains as tight around the HF failure region as possible with our construction (i.e., Eq. (24)). To this end, we define the ‘‘optimally-tuned’’ ISD as follows.

**Remark 2** *For  $\delta_\mathcal{L}$ , which defines  $\Omega_\mathcal{L}$ , first define  $\xi$  such that  $S_L(\mathbf{x}, \beta) \geq \xi \forall \mathbf{x} \in \Omega_\mathcal{L}$  (where  $0 < \xi < 0.5$ ). ( $S_L(\mathbf{x}, \beta)$  is responsible for the change in shape between  $f_\mathbf{x}(\mathbf{x})$  and  $\mathbf{q}_\mathbf{x}(\mathbf{x})$ .) Then, the optimal choices of  $\beta$  and  $\xi$  are defined as:*

$$(\beta^*, \xi^*) = \arg \min_{\beta, \xi} \left( \int_{\Omega_\mathcal{L}^c} \mathbf{q}_\mathbf{x}(\mathbf{x}, \beta) d\mathbf{x} - \lambda \xi \right)$$

for some fixed value of  $\lambda$  that must be chosen a priori. The reason for the above optimization problem is discussed in Appendix A.1.1.

Note that the ‘‘optimally-tuned’’ ISD defined above is not the same as the optimal ISD from Eq. (10), because  $\Omega_\mathcal{L} \neq \Omega_\mathcal{F}$  in general, and  $\int_{\Omega_\mathcal{L}^c} \mathbf{q}_\mathbf{x}(\mathbf{x}, \beta^*) d\mathbf{x} \neq 0$ . Instead, the ‘‘optimally-tuned’’ ISD is the best approximation of the optimal ISD we can construct given Stipulation 1 and the chosen form of  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta)$ . The problem of estimating  $\beta^*$  and  $\xi^*$  is addressed in Section 4.

Although the proposed method constructs a reasonably efficient ISD, due to the form chosen for  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta)$  (Eq. (24)), even the best possible ISD that can be constructed within the CVIS framework (the ‘‘optimally-tuned’’ ISD defined above) necessarily places some appreciable density outside the HF failure region ( $\Omega_\mathcal{L} \setminus \Omega_\mathcal{F}$  in particular). Depending on how closely or poorly the LF model approximates the HF model (i.e., how small  $\delta_\mathcal{L}$  is), the necessary density outside the HF failure region might lead to a poorer ISD than an ISD construction scheme that directly targets the HF failure region. However, such schemes either assume a parametric form for the distribution or construct a surrogate for the HF model to use for the ISD (as per Tabandeh et al. [38]). Compared to the former case, our method is often easier to tune, since it requires the selection of only one parameter, and has better expressivity due to the lack of an assumed distribution form. Compared to the latter case, our method is cheaper (contingent on the relative costs of the HF and LF models) as it does not require any HF model evaluations for training data.

### 3.1.2 Diagnosing Variance Reduction

Since neither CV nor IS guarantees variance reduction for all  $\alpha$  values or ISDs, we would like to know whether a specific choice of  $\tilde{\alpha}$  and  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta)$  in CVIS achieves variance reduction. To this end, we derive here a performance diagnostic that requires no additional HF or LF model evaluations. Let us begin with the following theorem, proven in Appendix B.1.

**Theorem 2** *Consider the estimators  $\hat{P}_{FCVMC}$  (Eq. (16)) and  $\hat{P}_{FCVIS}$  (Eq. (17)). If the ISD used for  $\hat{P}_{FCVIS}$  is  $\mathbf{q}_\mathbf{x}(\mathbf{x}, \beta)$ , the same LF failure estimator  $\hat{P}_{FL}$  is used for both cases such that it is independent of  $\hat{Q}_{MC}$  &  $\hat{Q}_{LMC}$  and  $\hat{Q}_{IS}$  &  $\hat{Q}_{LIS}$ , and  $N$  statistically independent samples are used for  $\hat{Q}_{MC}$  &  $\hat{Q}_{LMC}$  and  $\hat{Q}_{IS}$  &  $\hat{Q}_{LIS}$ , generated from their respective distributions (with  $N$  being the same in all cases). Then, for any arbitrary fixed value of  $\alpha$*

$$\text{Var} \left[ \hat{P}_{FCVIS} \right] \leq \text{Var} \left[ \hat{P}_{FCVMC} \right] \quad (29)$$

This theorem broadly states that, under proper conditions, the  $P_F$  estimate that combines IS (using the CVIS ISD) with CV will have variance that is less than or equal to the  $P_F$  estimate using CV alone. Intuitively, this makes sense.

Consequently, any value of  $\alpha$  that leads to variance reduction in  $\hat{P}_{FCVMC}$  will also lead to variance reduction in  $\hat{P}_{FCVIS}$ , which is the CVIS estimator  $\hat{P}_F$  when  $\alpha = \tilde{\alpha}$ , and  $\hat{P}_{FL} = \tilde{P}_{FL}$ . (Note that  $\hat{Q}_{IS} = \tilde{Q}$  and  $\hat{Q}_{LIS} = \tilde{Q}_L$  since  $q_{\mathbf{X}}(\mathbf{x}, \beta)$  is used as the ISD for  $\hat{P}_{FCVIS}$ )

We now state two theorems that help us determine values of  $\alpha$  that yield variance reduction in  $\hat{P}_{FCVMC}$ . They are proven in Appendices B.2 and B.3, respectively.

**Theorem 3** Define  $\Omega_{\Delta} := \{\mathbf{x} \in \Omega : I_H(\mathbf{x}) \neq I_L(\mathbf{x})\}$ , and let  $\alpha^*$  be the value of  $\alpha$  that leads to the maximum variance reduction allowed by pure control variates for  $\hat{P}_{FCVMC}$  (see Section 2.3). If

1.  $\hat{Q}_{MC}$  and  $\hat{Q}_{LMC}$  are estimated from the same set of  $N$  statistically independent samples generated according to  $f_{\mathbf{X}}(\mathbf{x})$ ,
2. The target failure probability is small (i.e.,  $P_F \ll 1$ ), and
3.  $\text{Var}[\hat{P}_{FL}] \ll \text{Var}[\hat{Q}_{LMC}]$

Then  $\tilde{\alpha}$  (as defined by Eq. (22)) estimates  $\alpha^*$  as  $\Omega_{\Delta} \rightarrow \emptyset$ , i.e.,

$$\tilde{\alpha} = \lim_{\Omega_{\Delta} \rightarrow \emptyset} \hat{\alpha}^* \quad (30)$$

**Theorem 4** Define  $P_{HL} := \mathbb{E}_f [I_H(\mathbf{X})I_L(\mathbf{X})]$ . Under the following conditions:

1.  $\hat{Q}_{MC}$  and  $\hat{Q}_{LMC}$  are estimated from the same set of  $N$  statistically independent samples generated according to  $f_{\mathbf{X}}(\mathbf{x})$ ,
2. The target failure probability is small (i.e.,  $P_F \ll 1$ )
3.  $\text{Var}[\hat{P}_{FL}] \ll \text{Var}[\hat{Q}_{LMC}]$ , and
4.  $\alpha = \alpha^{\dagger}$  (i.e., the underlying value that is estimated by  $\tilde{\alpha}$  (Eq. (20)).)

we have that  $\text{Var}[\hat{P}_{FCVMC}] \leq \text{Var}[\hat{Q}_{MC}]$  (i.e., variance reduction occurs in  $\hat{P}_{FCVMC}$ ), if

$$\kappa = \frac{P_{HL}}{P_F} \geq \frac{1}{2} \quad (31)$$

**Corollary 2** Under the conditions 1-4 of theorem 4,  $\text{Var}[\hat{P}_{FCVMC-ACV}] \leq \text{Var}[\hat{Q}] \Rightarrow \tilde{\alpha} \leq 4\rho_{HL}^2$ , where  $\rho_{HL}$  is the correlation between  $I_H(\mathbf{x})$  and  $I_L(\mathbf{x})$ , i.e.,

$$\rho_{HL}^2 = \frac{(P_{HL} - P_F P_{FL})^2}{P_F P_{FL} (1 - P_F) (1 - P_{FL})} \quad (32)$$

According to Theorem 4, variance reduction will be achieved if  $\kappa \geq \frac{1}{2}$  or, by Corollary 2 if  $\tilde{\alpha} \leq 4\rho_{HL}^2$ . The practical estimation of  $\kappa$  will be discussed in Section 4. Additionally, Theorem 3 shows that  $\alpha^{\dagger}$  asymptotically converges to the optimal  $\alpha^*$  as the LF model predictive quality improves. This fact, along with various practical benefits discussed in Section 4, provides strong justification for our formulation of the CVIS estimator.

**Remark 3** One useful interpretation of Theorem 4 is that under the stipulated conditions, if CV leads to variance reduction compared to pure Monte Carlo simulation, then the “size” of the set where both HF and LF models indicate failure must be at least half of the “size” of the set where HF indicates failure. If we consider the “size” of a set to be the probability measure denoted by  $P(\cdot)$ , we see that

$$\begin{aligned} \mathcal{P}(\{\mathbf{x} \in \Omega : I_H(\mathbf{x}) = 1\} \cap \{\mathbf{x} \in \Omega : I_L(\mathbf{x}) = 1\}) &\geq \frac{1}{2} \mathcal{P}(\{\mathbf{x} \in \Omega : I_H(\mathbf{x}) = 1\}) \\ &\Rightarrow \mathcal{P}(\{\mathbf{x} \in \Omega : I_H(\mathbf{x}) = 1, I_L(\mathbf{x}) = 1\}) \geq \mathcal{P}(\{\mathbf{x} \in \Omega : I_H(\mathbf{x}) = 1, I_L(\mathbf{x}) = 0\}) \end{aligned} \quad (33)$$

This gives us further intuition into the model quality necessary for our framework, and, in theory, allows us to assert whether a value of  $\delta_{\mathcal{L}}$  as defined by stipulation 1 is small enough. Simply stated, to achieve variance reduction the LF model must correctly predict failure more often than it incorrectly predicts safety.

### 3.1.3 Practical Variance Reduction: CV vs. IS

An interesting observation can be made about the relative usefulness of IS and CV in achieving variance reduction in the CVIS framework. Notice that as  $S_L(\mathbf{x}, \beta) \rightarrow I_L(\mathbf{x})$ ,  $\text{Var}_q [I_L(\mathbf{X})] \rightarrow 0 \Rightarrow \text{Var}_q [I_L(\mathbf{X})/S_L(\mathbf{x}, \beta)] \rightarrow 0$ . Consequently,  $\text{Cov}_q [I_H(\mathbf{X})/S_L(\mathbf{x}, \beta), I_L(\mathbf{X})/S_L(\mathbf{x}, \beta)] \rightarrow 0$  by definition.

Therefore, as IS gets more and more efficient, CV loses its ability to further reduce variance. Additionally, IS is significantly more effective for rare event estimation than CV in reducing computational effort in practice. This is primarily because the latter requires Monte Carlo estimates of  $P_F$  and  $P_{F_L}$  (Eq. (12)); when the target probabilities are small, one must sample from deep in the tails to find even one state  $\mathbf{x}_F$  such that  $I_H(\mathbf{x}_F) = 1$  or  $I_L(\mathbf{x}_F) = 1$ , and this is difficult when drawing directly from the parent distribution  $f_{\mathbf{X}}(\mathbf{x})$ .

Thus, in practice, we recommend using CV as a tool to improve robustness, which reduces left-over variance to overcome any suboptimality in IS rather than being a significant variance reduction tool in its own right. In this view, it becomes less relevant to estimate the optimal tuning constant  $\alpha^*$ , as using any other  $\alpha$  value (provided it does not increase the variance when applied) only leads to a minute difference in estimator efficiency. This provides clear motivation for sub-optimal formulations of  $\alpha$ , such as ours, that provide other benefits.

In the particular case of the proposed CVIS framework, using  $\tilde{\alpha}$  (Eq. (22)) simplifies the resulting estimator, which allows us to provide a closed-form variance estimator that incorporates the uncertainty in the estimation of  $\alpha$ , unlike most other algorithms that treat the estimated optimal  $\alpha$  value as a constant [33]. Our framework also only requires the form of the ISD up to an integration constant, which is a significant benefit. Of course, the primary benefit remains that we do not need to estimate the covariance between  $I_H(\mathbf{x})$  and  $I_L(\mathbf{x})$  to apply the estimator.

## 3.2 Statistical Properties of the Proposed Estimator

We present here statistical properties of the estimators  $\tilde{P}_F$  and  $\tilde{\alpha}$ , as defined in Eqs. (21) and (22) respectively.

**Theorem 5** *For sufficiently large  $N$  (as required in Eqs. (25) and (26)),*

$$\ln(\tilde{\alpha}) \sim \mathcal{N}(\mu_\alpha, \sigma_\alpha^2) \Rightarrow \tilde{\alpha} \sim \text{Lognormal}(\mu_\alpha, \sigma_\alpha^2) \quad (34)$$

where

$$\mu_\alpha = \ln \left( \frac{\mathbb{E}[\tilde{Q}]}{\mathbb{E}[\tilde{Q}_L]} \right) \quad \text{and} \quad \sigma_\alpha^2 = \frac{\text{Var}[\tilde{Q}]}{(\mathbb{E}[\tilde{Q}])^2} + \frac{\text{Var}[\tilde{Q}_L]}{(\mathbb{E}[\tilde{Q}_L])^2} \quad (35)$$

The proof is presented in Appendix B.4. Using known results for the Lognormal distribution, we get

$$\mathbb{E}[\tilde{\alpha}] = \exp \left( \mu_\alpha + \frac{\sigma_\alpha^2}{2} \right) \quad (36)$$

$$\text{Var}[\tilde{\alpha}] = \{ \exp(\sigma_\alpha^2) - 1 \} \exp(2\mu_\alpha + \sigma_\alpha^2) \quad (37)$$

Since  $\tilde{Q}$  and  $\tilde{Q}_L$  are unbiased and consistent estimators by construction,  $\sigma_\alpha \rightarrow 0$  as  $N \rightarrow \infty$ , implying that  $\tilde{\alpha}$  is asymptotically unbiased and consistent.

If we once again consider that  $\tilde{P}_{F_L}$  is independent of  $\tilde{Q}$  and  $\tilde{Q}_L$  (or  $\tilde{Q}$  and  $\tilde{Q}_L$ ), then  $\tilde{P}_{F_L}$  is independent of  $\tilde{\alpha}$ , and we can write the variance of the proposed estimator  $\tilde{P}_F$  as

$$\text{Var}[\tilde{P}_F] = (\mathbb{E}[\tilde{\alpha}])^2 \text{Var}[\tilde{P}_{F_L}] + \left( \mathbb{E}[\tilde{P}_{F_L}] \right)^2 \text{Var}[\tilde{\alpha}] + \text{Var}[\tilde{\alpha}] \text{Var}[\tilde{P}_{F_L}] \quad (38)$$

which follows directly from the definition of the variance for the product of two independent random variables. Consequently, the coefficient of variation of  $\tilde{P}_F$  is

$$\text{CoV}[\tilde{P}_F] = \sqrt{(\text{CoV}[\tilde{\alpha}])^2 + \left( \text{CoV}[\tilde{P}_{F_L}] \right)^2 + \left( \text{CoV}[\tilde{\alpha}] \text{CoV}[\tilde{P}_{F_L}] \right)^2} \quad (39)$$

## 3.3 Sample Allocation for CVIS

In most CV applications, an important consideration is the optimal sample allocation, i.e., the number of samples that are assigned to each individual model to achieve a CV estimate with the minimum variance for a given computational budget.

The general problem was formulated by Gorodetsky et al. [33] in the following manner. Let the total computational budget be given by  $C$ , and let  $w$  and  $w_L$  be the cost of a single evaluation of the HF and LF models, respectively. Further, let us represent the number of HF evaluations by  $N$  and the number of LF evaluations for every HF evaluation as  $r$ , such that the total number of LF evaluations is given by  $rN$  ( $N \geq 1$  and  $r \geq 1$ ). Then, the optimal sample allocation refers to finding the optimal values  $N^*$  and  $r^*$ , defined as

$$(N^*, r^*) = \arg \min_{N, r} \text{Var} \left[ \hat{P}_{FCV} \right] \quad (40)$$

subject to  $N(w + rw_L) \leq C$

where  $\hat{P}_{FCV}$  is as defined in Eq. (15). Unfortunately,  $\text{Var} \left[ \hat{P}_{FCV} \right]$  depends not only on  $N$  and  $r$ , but also on the mean and variance of  $\hat{Q}$ ,  $\hat{Q}_L$  and  $\hat{P}_{FL}$ , as well as the covariance between  $\hat{Q}$  and  $\hat{Q}_L$ . Usually, coarse estimates of these statistics are computed using pilot samples (samples generated during a pilot run) and are used to find approximately optimal values of  $N^*$  and  $r^*$ . It is accepted that a misestimation of the statistics does lead to some degradation of performance (compared to the theoretical optimal); however, a near-optimal sample allocation still leads to better performance compared to a blindly chosen optimal sample allocation.

In the above context, a pilot run refers to the generation of a small number of samples (compared to the number of samples generated for the final estimate  $\hat{P}_F$ ) from the input distribution to compute preliminary estimates for the problem. In general problems, these estimates are serviceable despite having moderate-to-high variance, depending on the number of pilot samples. Unfortunately, in failure probability estimation, this requires estimating the statistics of an indicator function having an exceedingly rare probability of taking a non-zero value. In other words, due to the discrete binary nature of the failure indicator function, any pilot sample set that does not sample the failure domain a statistically significant number of times is of practically no use. Although the pilot estimators may be theoretically unbiased, small-sample estimates of small failure probabilities are notoriously unreliable; a small set of samples rarely explores the failure domain yielding a failure probability estimate of zero, which is of no use for the CV estimate. On the other hand, if the small sample estimate does (by chance) sample from the failure domain, then  $P_F$  will likely be greatly overestimated and, again, will not be useful for the CV estimate. Therefore, in such a context, a pilot run loses meaning, as even coarse estimates require very large sample sizes.

Instead of pilot runs, most rare-event reliability algorithms call for an *exploration run*, which is used to find the failure domain and thereby enable the generation of more informative samples for the final estimator  $\hat{P}_F$ . This entails generating an appreciable number of samples (compared to the number of samples generated for the final estimate) such that the input space  $\Omega$  is sufficiently explored. The exploration run must be carried out until reasonable confidence in having found all important failure regions is achieved. Often, the number of samples required for such an exploration run is decided adaptively until some confidence criterion is met. Clearly, it is infeasible to do such a start-up run using the HF model directly. In a multifidelity setting (such as the proposed CVIS framework), the LF model can be used to carry out the exploration run instead. In addition to identifying the failure domain, the exploration run also typically results in robust estimates of the LF model statistics (e.g.,  $\hat{P}_{FL}$ ). This estimate is then subsequently used in the CV problem.

In the proposed CVIS framework, we estimate  $\tilde{P}_{FL}$  from Eq. (21) using a suitable reliability method (e.g. subset simulation) on the LF model as an exploration run. We then must accurately estimate  $\tilde{\alpha}$  in order to estimate  $\tilde{P}_F$ . This calls for an equal number of HF and LF model evaluations (since both models are evaluated on the same set of samples). Thus, in our framework, the standard CV notion of optimal sample allocation does not hold. Instead, given a total budget  $C$ , a natural sample allocation scheme follows:

- Step 1: Conduct an exploration run using the LF model until all important regions are identified, and collect  $\tilde{P}_{FL}$  as a byproduct. Let this budget be denoted  $C_E = w_L N_E$  where the number of LF model evaluations required for exploration is  $N_E$ .
- Step 2: Generate a number of samples  $N_Q$  (to estimate  $\tilde{Q}$  and  $\tilde{Q}_L$ ) using IS on which both the HF and LF models are evaluated. Choose  $N_Q$ , having budget  $C_Q = N_Q(w + w_L)$ , such that  $\text{CoV}[\tilde{\alpha}] \approx \text{CoV}[\tilde{P}_{FL}]$  (which is optimal according to Eq. (38)), or until the total budget  $C$  is exhausted (i.e.  $C_Q = C - C_E$ ).
- Step 3: If  $C_E + C_Q < C$ , denote the surplus budget as  $C_S = C - C_E - C_Q$ . This surplus can now be optimally allocated according to the following procedure:

$$(N_{S_Q}^*, N_{S_L}^*) = \arg \min_{N_{S_Q}, N_{S_L}} \text{Var} \left[ \hat{P}_{FCV} \right] \quad (41)$$

subject to  $(w + w_L)N_{S_Q} + w_L N_{S_L} = C_S$

Here  $N_{S_Q}$  is defined as the additional number of samples that can be generated to refine  $\tilde{Q}$  and  $\tilde{Q}_L$ , and  $N_{S_L}$  is the additional number of samples that can be generated to refine  $\tilde{P}_{FL}$ . Consequently,  $\text{Var} \left[ \hat{P}_{FCV} \right]$  corresponds to  $N_Q + N_{S_Q}$  samples being used to evaluate  $\tilde{Q}$  and  $\tilde{Q}_L$ , and  $N_E + N_{S_L}$  samples being used to evaluate  $\tilde{P}_{FL}$ . The optimization in Eq. (41) can, of course, be solved because robust estimates of all the necessary statistics are available from steps 1 and 2.

At the end of this procedure, the HF model is evaluated a total of  $N_Q + N_{S_Q}^*$  times, while the LF model is evaluated  $N_E + N_Q + N_{S_Q}^* + N_{S_L}^*$  times.

## 4 The CVIS Algorithm

This section presents the proposed CVIS algorithm, which provides a practical way to use the CVIS estimator for bifidelity Reliability Analysis problems. We first outline the steps of the proposed methods. We then make recommendations for specific methods to use in each step, as appropriate.

The general steps of the proposed CVIS methods are as follows:

- Step 1: Conduct an exploration run and estimate  $\tilde{P}_{FL}$  using an unbiased estimator.
- Step 2: Use the samples near the LF failure region, generated as part of step 1, to construct the ISD  $q_{\mathbf{x}}(\mathbf{x}, \beta^*)$ . In particular, determine the value of  $\beta^*$ , discussed below.
- Step 3: Draw  $N$  samples from the ISD to compute  $\tilde{Q}$  and  $\tilde{Q}_L$  using IS (See Section 3) and estimate  $\tilde{\alpha}$  (Eq. (27)).
- Step 4: Estimate  $\tilde{P}_F$  from Eq. (21).
- Step 5: (*Optional.*) Compute  $\kappa$  to diagnose if the LF model follows Stipulation 1 and the CVIS estimator is well-behaved.
- Step 6: Estimate  $\text{CoV}[\tilde{\alpha}]$  (see Section 3.2) and  $\text{CoV}[\tilde{P}_{FL}]$ , then use Eq. (39) to estimate  $\text{CoV}[\tilde{P}_F]$ .
- Step 7: If  $\text{CoV}[\tilde{P}_F] > \tau$  (where  $\tau$  is a pre-specified threshold) and the total computational budget has not been exhausted, then assign the surplus budget in accordance with the optimization procedure in Eq. (41). (See Section 3.3 for more details.)
- Step 8: If  $\text{CoV}[\tilde{P}_F] \leq \tau$  or the computational budget is exhausted, stop and use  $\tilde{P}_F$  as the failure estimate.

To estimate  $\tilde{P}_{FL}$ , we recommend using Subset Simulation (SuS) [7], which is the state-of-the-art for single fidelity rare-event failure probability estimation. The method works by constructing a sequence of nested subsets  $\mathcal{S}_i = \{\mathbf{x} \in \Omega : g(\mathbf{x}) \leq b_i\}$ ,  $i = 0, 1, \dots, M_S$ , such that  $\mathcal{S}_i \subseteq \mathcal{S}_{i-1}$ , that converges to the failure region  $\Omega_{\mathcal{F}} = \mathcal{S}_{M_S} = \{\mathbf{x} \in \Omega : g(\mathbf{x}) \leq b_{M_S} = 0\}$ . Samples are then drawn from the conditional probability distributions  $f_{\mathbf{x}}(\mathbf{x} | \mathbf{x} \in \mathcal{S}_{i-1})$  to estimate a sequence of conditional probabilities  $P_{i|i-1}$  from which the probability of failure is estimated as  $P_F = P_0 \prod_{i=1}^{M_S} P_{i|i-1}$  (where  $P_0 = 1$  as  $b_0 = \infty \Rightarrow \mathcal{S}_0 = \Omega$  by definition). This allows us to efficiently compute  $\tilde{P}_{FL}$  while keeping  $\text{CoV}[\tilde{P}_{FL}]$  low by simply setting  $g(\mathbf{x}) = L(\mathbf{x})$ . Next, we use the response function threshold value  $b_{M_S-1}$  and the associated probability  $P_{M_S|(M_S-1)}$  to estimate  $\beta^*$  directly (without having to compute  $\delta_{\mathcal{L}}$ ) as:

$$\beta^* = \frac{2}{b_{M_S-1}} \ln \left( \frac{2}{P_{M_S|(M_S-1)}} - 1 \right) \quad (42)$$

A brief justification for Eq. (42) is given in Appendix A.1.2. Although this is a heuristic approach, we have found this estimate to work well in practice. All the examples studied in Section 5 use this procedure to define the ISD.

Since our ISD is constructed to retain the full complexity of the LF model, it can, in general, be non-elliptic, multimodal, poorly scaled, or even degenerate. To sample from such complex distributions, as is necessary for evaluating  $\tilde{Q}$  and  $\tilde{Q}_L$ , we use Differential Evolution Markov Chain (DE-MC) [39, 40], which is a Markov Chain Monte Carlo (MCMC) sampling method adapted from genetic algorithms for numerical optimization. See Appendix A.2 for a brief discussion about initializing DE-MC in this context. However, any similarly robust sampling scheme can be applied. Subsequently, to evaluate the estimator variance of  $\tilde{Q}$  and  $\tilde{Q}_L$ , we recommend using the Replicated Batch Means (RBM) estimator [41, 42], which is specially constructed for MCMC methods that use multiple parallel independent

Markov Chains. (Note that a specialized estimator is necessary, as the naïve estimator of the Markov Chain asymptotic variance is not a consistent estimator. Further details are provided in Appendix A.3)

Finally, to estimate the diagnostic  $\kappa$ , we can use the following estimator,

$$\tilde{\kappa} = \frac{\tilde{Q}_{HL}}{\tilde{Q}} \quad (43)$$

$$\tilde{Q}_{HL} = \frac{1}{N} \sum_{i=1}^N \left[ \frac{I_H(\mathbf{x}_i)I_L(\mathbf{x}_i)}{S_L(\mathbf{x}_i, \beta^*)} \right] \quad (44)$$

where the same  $\mathbf{x}_i, i = 1, 2, \dots, N$  are used for  $\tilde{Q}_{HL}$  as were used for  $\tilde{Q}$  and  $\tilde{Q}_L$ . Hence, this estimator requires no additional model calls beyond those necessary for estimating  $\tilde{Q}$  and  $\tilde{Q}_L$ .

## 5 Numerical Examples, Results, and Discussion

The performance of the CVIS algorithm is presented here, along with relevant insights, through two analytical case studies and one numerical problem. For the analytical examples, CVIS is compared to the *Multifidelity Importance Sampling* (MFIS) method by Peherstorfer et al. [28] and the *Ensemble Approximate Control Variates* (E-ACV) method by Pham & Gorodetsky [35], with particular emphasis on model call requirements and the total uncertainty in the failure prediction. These methods are the best analogs for the CVIS method in the current literature. However, a few adaptations have been made in the application of these algorithms in order to ensure consistency with the proposed CVIS method. These changes are discussed first in Section 5.1. The subsequent sections present the three examples.

### 5.1 Implementation Details for MFIS and E-ACV

The following adjustments are made in the MFIS and E-ACV methodologies to ensure proper comparison to CVIS:

- Instead of using Gaussian Mixture Models, as originally suggested for both the MFIS and E-ACV methods, the ISD is constructed according to the procedure proposed for the CVIS algorithm (as described in Section 4). This allows us to use exactly the same sampling density for all three methods.
- The E-ACV algorithm uses an IS estimator for  $\hat{P}_{FL}$  (in addition to  $\hat{Q}$  and  $\hat{Q}_L$ ). In this paper, we instead use SuS to estimate  $\hat{P}_{FL}$  for the E-ACV algorithm. This ensures that the performance of the LF failure estimator is the same for both CVIS and E-ACV.
- Following from the previous point, since  $\hat{P}_{FL}$  is now independent of both  $\hat{Q}$  and  $\hat{Q}_L$  for the E-ACV method as well, the  $\alpha$  parameter estimation is simplified in the following way. The procedure described in [35] uses an ensemble of realizations for each of the estimators  $\hat{P}_{FL}$ ,  $\hat{Q}$ , and  $\hat{Q}_L$ , which are used to compute the variances of each of these estimators as well as the covariances between them. Instead, when the E-ACV estimator is used in this manuscript, only a single realization of  $\hat{P}_{FL}$  is needed; the variance of the estimate is calculated using the estimator presented in the original SuS paper [7], and the covariances between  $\hat{P}_{FL}$  and  $\hat{Q}$  and  $\hat{P}_{FL}$  and  $\hat{Q}_L$  are set to zero, leveraging the independence between these estimators. Everything else remains unchanged.

### 5.2 Example 1: Noisy and Biased Analytical Model

In this example, we study the performance of the proposed CVIS algorithm for varying levels of bias and noise between the HF and LF models. A simple analytical 2-dimensional system is considered, with the inputs following a standard Normal distribution. The HF model is given by

$$H(\mathbf{x}) = (x_1 - 2)^2 + (x_2 - 2)^2 - \frac{1}{2} (x_1 + x_2 - 1)^2 + 3 \quad (45)$$

where  $\mathbf{x} = [x_1 \quad x_2]^T$ . The LF model gives a biased and noisy prediction of the HF response as

$$L(\mathbf{x}) = H(\mathbf{x}) + \delta + \epsilon \quad (46)$$

where  $\delta$  is a bias term and  $\epsilon \sim \mathcal{N}(0, \sigma_\epsilon^2)$  is a noise term. The existence of  $\epsilon$  makes  $L(\mathbf{x})$  a stochastic field; however, for ease of analysis, only a single realization was used. Twelve cases were considered in all, corresponding to all combinations of  $\delta \in \{-1, 0, 1, 2\}$  and  $\sigma_\epsilon \in \{0, 1, 2\}$ . The failure surfaces are compared for each case in Figure 2.

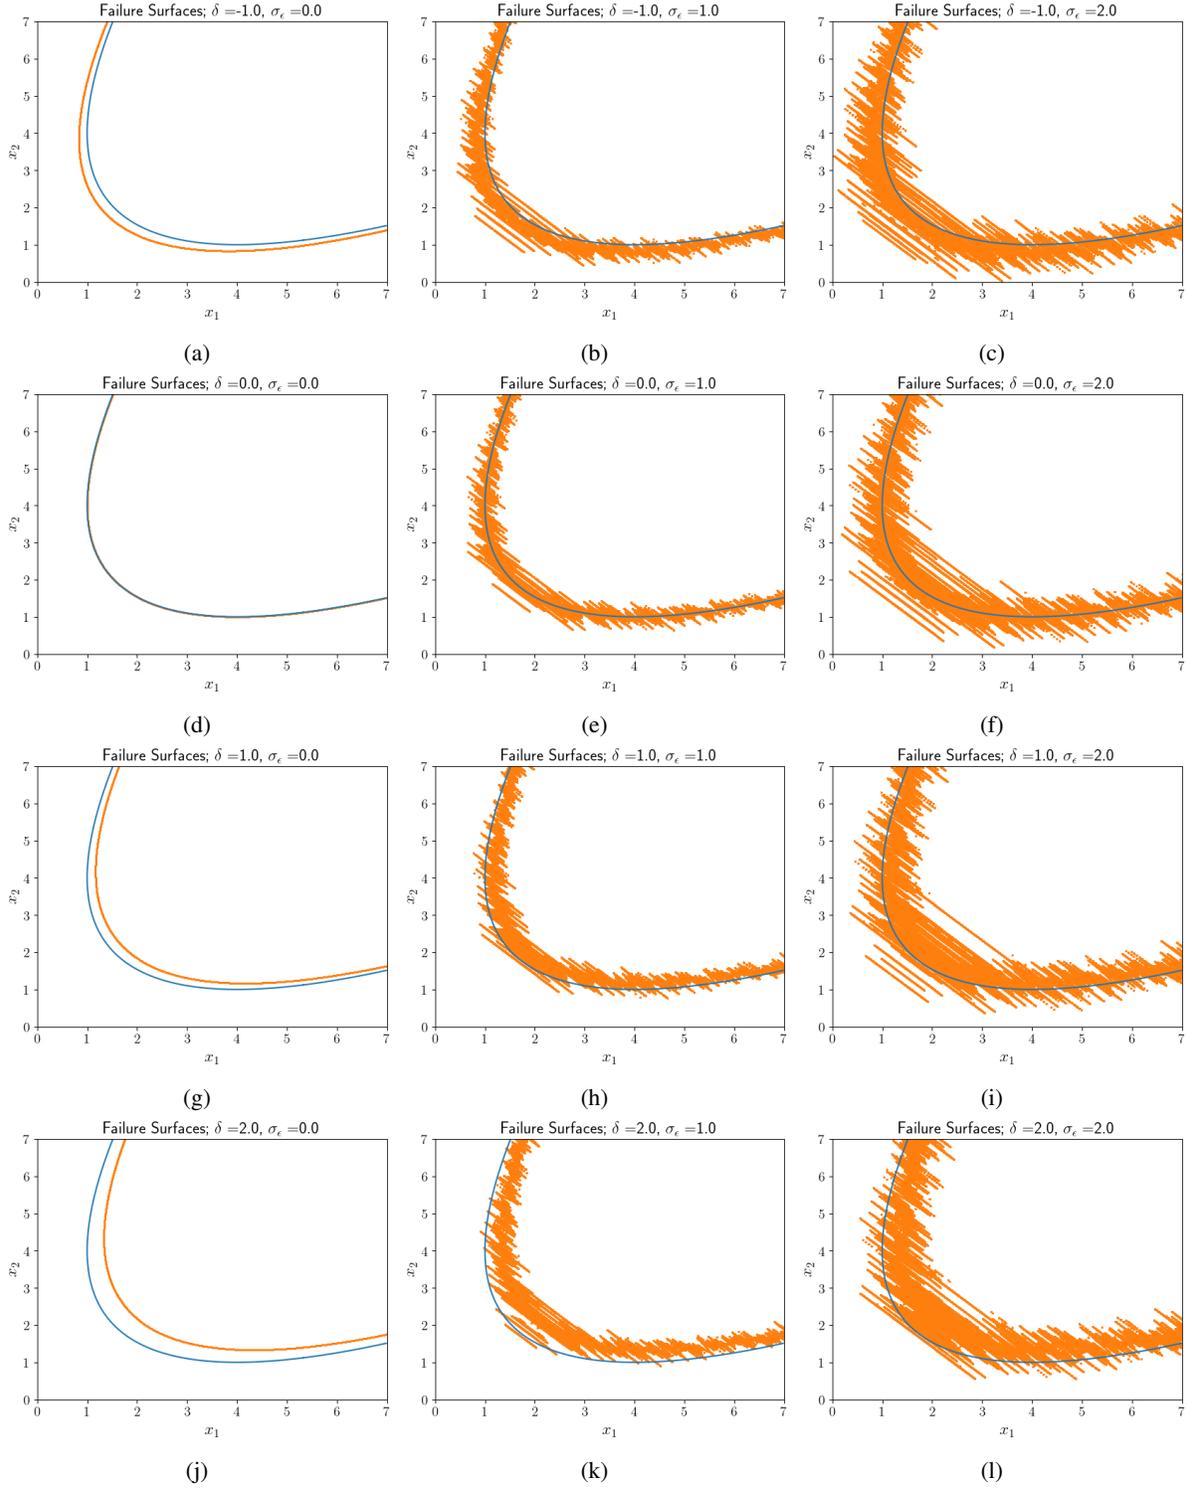


Figure 2: Example 1: Failure limit surface comparisons. In each figure, the solid blue line corresponds to  $H(\mathbf{x}) = 0$ , while the orange dashed line corresponds to  $L(\mathbf{x}) = 0$ . The title of each subfigure shows the values of  $\delta$  and  $\sigma_\epsilon$ .

Table 1 shows some statistics of the models, including the true failure probability as well as the correlation between the HF and LF models and the correlation between their respective indicator functions. In fact, this highlights one key reason it is difficult to apply CV for multi-fidelity reliability analysis. The standard CV estimator requires correlation between the indicators to achieve variance reduction. Even if two models are well correlated in terms of their response function predictions, the indicators might have a much weaker correlation, as illustrated in Table 1. Furthermore, even if model response correlation information is available through physical laws or engineering information, this usually does not translate into information about the correlation between the failure indicator functions constructed from the models. Therefore, a formulation like CVIS that does not require explicit information about the correlation between failure indicator functions for each model to achieve variance reduction is very convenient.

Model	Failure Probability	$\rho [H(\mathbf{X}), L(\mathbf{X})]$	$\rho [I_H(\mathbf{X}), I_L(\mathbf{X})]$
LF: $\delta = -1, \sigma_\epsilon = 0$	8.42 E-3	1.00	0.71
LF: $\delta = -1, \sigma_\epsilon = 1$	9.32 E-3	0.98	0.63
LF: $\delta = -1, \sigma_\epsilon = 2$	14.05 E-3	0.91	0.47
LF: $\delta = 0, \sigma_\epsilon = 0$	4.23 E-3	1.00	1.00
LF: $\delta = 0, \sigma_\epsilon = 1$	5.12 E-3	0.98	0.73
LF: $\delta = 0, \sigma_\epsilon = 2$	7.93 E-3	0.91	0.52
LF: $\delta = 1, \sigma_\epsilon = 0$	2.10 E-3	1.00	0.70
LF: $\delta = 1, \sigma_\epsilon = 1$	2.65 E-3	0.98	0.69
LF: $\delta = 1, \sigma_\epsilon = 2$	4.45 E-3	0.91	0.53
LF: $\delta = 2, \sigma_\epsilon = 0$	1.00 E-3	1.00	0.48
LF: $\delta = 2, \sigma_\epsilon = 1$	1.19 E-3	0.98	0.51
LF: $\delta = 2, \sigma_\epsilon = 2$	2.25 E-3	0.91	0.49
HF	4.23 E-3	-	-

Table 1: Example 1: HF and LF model statistics.  $\rho [\cdot]$  denotes the correlation between two random variables. To compute these statistics, a set of  $10^7$  samples was generated from the 2D standard Normal input distribution. The HF model, as well as all 12 cases for the LF model, were evaluated on this sample set.

For all twelve LF model cases, the sample allocations are summarised in Table 2 for all methods. In all cases, the IS is conducted with 25 chains and 400 samples per chain using DE-MC for a total of 10,000 HF and LF model evaluations seeded from the SuS. The primary difference lies in the allocation of LF model evaluations prior to the initiation of IS. For CVIS, all samples are allocated to the SuS for estimation of  $\tilde{P}_{FL}$  using 10,000 samples per subset for a total of  $10,000 \times M_S$  LF model evaluations. However, both MFIS and E-ACV require the ISD to be known exactly, including the normalizing constant (which is not necessary for CVIS), which is estimated by Monte Carlo integration. To ensure that the total computational budget remained the same across all three methods, the SuS budget from CVIS was split between SuS and Monte Carlo integration for MFIS and E-ACV. Two cases were considered: Case ‘A’ – 2000 samples per subset for SuS, and  $8000 \times M_S$  samples for the Monte Carlo integration; and Case ‘B’ – 5000 samples per subset for SuS, and  $5000 \times M_S$  samples for the Monte Carlo integration. Note that as the LF model changes, its failure probability changes; thus,  $M_S$  also changes. However, this sample allocation keeps the total number of HF and LF model calls equal among all three algorithms.

Sampling Procedure	IS (DE-MC)		Subset Simulation		Monte Carlo Integration	
	HF Calls	LF Calls	HF Calls	LF Calls	HF Calls	LF Calls
CVIS	10,000	10,000	-	$10,000 \times M_{SS}$	-	-
MFIS-A	10,000	10,000	-	$2,000 \times M_{SS}$	-	$8,000 \times M_{SS}$
E-ACV-A	10,000	10,000	-	$2,000 \times M_{SS}$	-	$8,000 \times M_{SS}$
MFIS-B	10,000	10,000	-	$5,000 \times M_{SS}$	-	$5,000 \times M_{SS}$
E-ACV-B	10,000	10,000	-	$5,000 \times M_{SS}$	-	$5,000 \times M_{SS}$

Table 2: Sample allocation summary for example 1.  $M_{SS}$  is the number of subsets required by the Subset Simulation procedure.

Figure 3 compares statistics from CVIS against MFIS and E-ACV from one hundred independent trials for the sample allocations explained above. These plots show the normalized root mean square error (RMSE) (Figures 3a, 3c, and 3e) and coefficient of variation (CoV) (Figures 3b, 3d, and 3f) of the estimators for different levels of noise and increasing model bias. It is clear that the performance of CVIS is always comparable and usually slightly better than MFIS and E-ACV for the same computational budget, even as the quality of the LF model deteriorates due to increased bias or noise. Additionally, the strong similarity in the RMSE and CoV values for all cases indicates that there is no bias in the

estimation. The CoV plots in Figure 3 also explicitly show the contributions of  $\tilde{\alpha}$  (blue dashed lines) and  $\tilde{P}_{FL}$  (blue dotted lines) to the variance of  $\tilde{P}_F$  (see Eq. (39)). Such a breakdown is possible only due to the simple construction of the proposed CVIS estimate; for a more complex estimator like E-ACV, it is exceedingly difficult, if not impossible, to account for every source of uncertainty as well as the interactions between them. This ability of the CVIS estimator to cleanly separate sources of uncertainty is another strength of the formulation.

### 5.3 Example 2: A Five-story Shear Building

We next consider the case of the five-story shear building adapted from [43] and depicted in Figure 4a. Each floor is considered to have a lumped mass of  $m = 45,000$  kg, and the stories are all undamped with the same stiffness  $k = 20,000$  kN m<sup>-1</sup>. A sinusoidal load of the form  $\mathbf{p}(t) = s p_0 \sin(\omega_p t)$  is applied, where  $t$  denotes time,  $\omega_p$  is the frequency of the forcing function,  $p_0 = 100$  kN is the nominal force magnitude, and  $\mathbf{s} = [s_1 \ s_2 \ s_3 \ s_4 \ s_5]^T$  is an unnormalized shape vector that controls the magnitude of the force applied to each story. The system is modeled by the set of linear differential equations given by:

$$\mathbf{M}\ddot{\mathbf{u}}(t) + \mathbf{K}\mathbf{u}(t) = \mathbf{p}(t) \quad (47)$$

where  $\mathbf{M}$  is the mass matrix, and  $\mathbf{K}$  is the stiffness matrix. The displacements of each floor are denoted by the vector  $\mathbf{u}(t) = [u_1(t) \ u_2(t) \ u_3(t) \ u_4(t) \ u_5(t)]^T$ .

Both  $\omega_p$  and the shape vector  $\mathbf{s}$  are considered to be stochastic; therefore, the random vector of inputs for this problem is  $\mathbf{x} = [s_1 \ s_2 \ s_3 \ s_4 \ s_5 \ \omega_p]^T$ . Each  $s_i$  is assumed to follow a standard normal distribution ( $s_i \sim \mathcal{N}(0, 1)$ ), and  $\omega_p$  is assumed uniform in the range [5, 50] Hz. ( $\omega_p \sim \mathcal{U}(5, 50)$ ). Failure occurs if the relative displacement between any two stories or between the ground and the first story exceeds 25 cm at any time instant in the interval  $t \in [0, 1]$  sec. The building is considered to be undeformed and at rest at  $t = 0$ .

The model is simplified by expressing the equations of motion (Eq. (47)) in modal coordinates as:

$$\begin{aligned} \ddot{\mathbf{q}}(t) + \mathcal{K}\mathbf{q}(t) &= \mathbf{P}(t) \\ \mathbf{u}(t) &= \mathbf{\Phi}^T \mathbf{q}(t) \\ \mathcal{K} &= \mathbf{\Phi}^T \mathbf{K} \mathbf{\Phi} \\ \mathbf{P}(t) &= \mathbf{\Phi}^T \mathbf{p}(t) \end{aligned} \quad (48)$$

where  $\mathbf{q}(t) = [q_1(t) \ q_2(t) \ q_3(t) \ q_4(t) \ q_5(t)]^T$  is the modal coordinate vector (with  $q_i(t)$  being the  $i^{\text{th}}$  modal coordinate,  $i \in \{1, 2, 3, 4, 5\}$ ),  $\mathcal{K}$  is the diagonal modal stiffness matrix, and  $\mathbf{P}(t)$  is the modal force vector.  $\mathbf{\Phi} = [\phi_1(t) \ \phi_2(t) \ \phi_3(t) \ \phi_4(t) \ \phi_5(t)]$  is the mode shape matrix where the column vector  $\phi_i$  is the  $i^{\text{th}}$  mode shape. It is normalized such that  $\mathbf{\Phi}^T \mathbf{M} \mathbf{\Phi} = \mathbf{I}$ , the identity matrix.

The HF model includes all five modes, therefore accurately modeling the full displacement history and thus accurately modeling structural failure. The LF model, on the other hand, only considers the one or two modes whose natural frequencies are nearest to the forcing function frequency  $\omega_p$ . Eq. (54) defines this criterion more rigorously. Moreover, the LF model only records the maximum story displacement that occurs at any time instant rather than recording all story displacements to compute the inter-story drift. Because this LF model sometimes underestimates the deformation that causes failure for the higher modes, a multiplicative safety factor of 2.0 is applied to the deflection predicted by the LF model to ensure that it is a conservative predictor of failure.

Let  $\omega_{n_i}$  be the  $i^{\text{th}}$  natural frequency of the structure, then using the modal coordinates (Eq. (48)), the HF model is defined as

$$H(\mathbf{x}) = 0.25 - \arg \max_{0 \leq t \leq 1} (\|\mathbf{r}(t)\|_\infty) \quad (49)$$

$$\mathbf{r}(t) = [|u_1^H(t)| \ |u_2^H(t) - u_1^H(t)| \ |u_3^H(t) - u_2^H(t)| \ |u_4^H(t) - u_3^H(t)| \ |u_5^H(t) - u_4^H(t)|]^T \quad (50)$$

$$\mathbf{u}^H(t) = [u_1^H(t) \ u_2^H(t) \ u_3^H(t) \ u_4^H(t) \ u_5^H(t)]^T = \sum_{i=1}^5 \phi_i q_i(t) \quad (51)$$

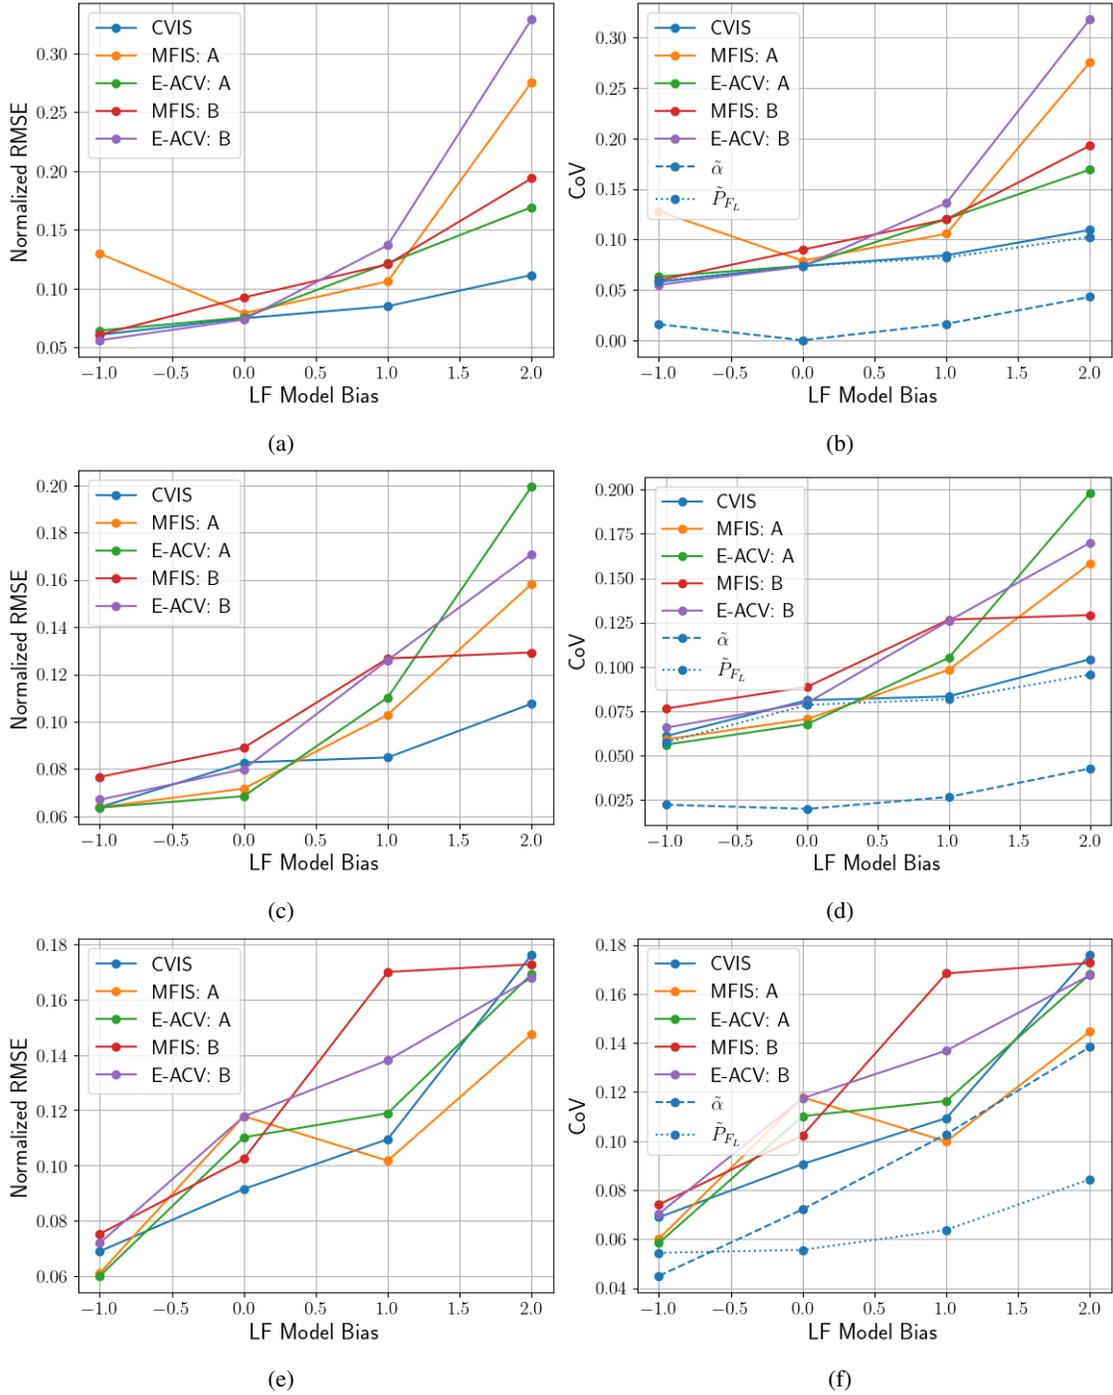


Figure 3: Example 1: (a), (c), and (e) show the root mean squared errors, and (b), (d), and (f) show the coefficient of variation for different magnitudes of noise and increasing model bias. Figures (a) and (b) correspond to  $\sigma_\epsilon = 0$ , figures (c) and (d) correspond to  $\sigma_\epsilon = 1$ , and figures (e) and (f) correspond to  $\sigma_\epsilon = 2$ . Statistics are computed as the mean from 100 independent trials of each algorithm.

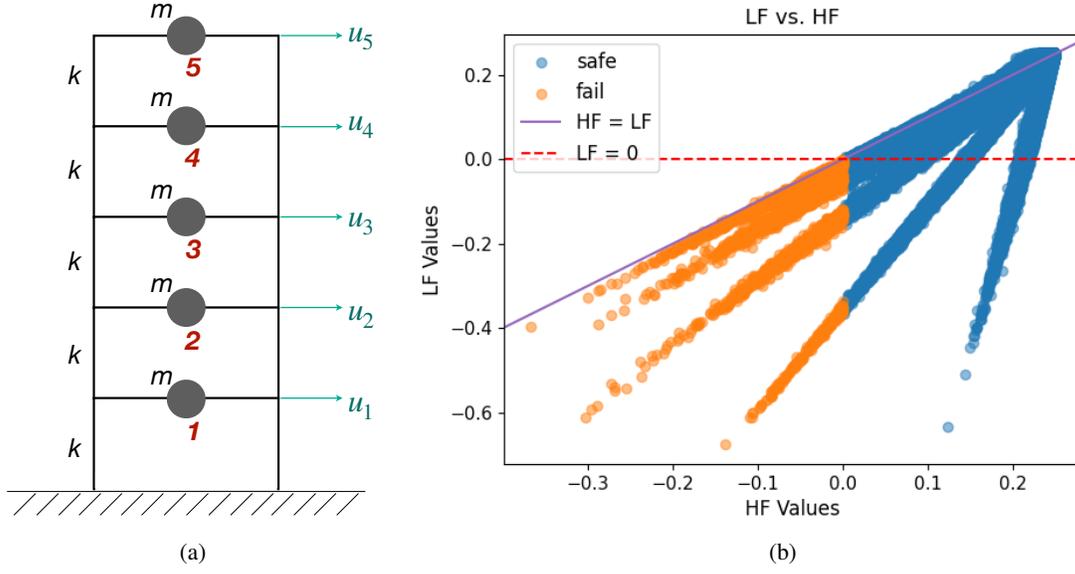


Figure 4: Example 2: (a) A schematic of the five-story shear building. (b) Scatterplot of HF response predictions vs. LF response predictions using 1 million samples. The points are colored according to the HF model predictions; blue points correspond to safety, and orange points correspond to failure. On the other hand, the LF model predicts failure in all samples under the red dashed line.

We similarly define the LF model as

$$L(\mathbf{x}) = 0.25 - 2 \arg \max_{0 \leq t \leq 1} (\|\mathbf{u}^L(t)\|_\infty) \quad (52)$$

$$\mathbf{u}^L(t) = [u_1^L(t) \quad u_2^L(t) \quad u_3^L(t) \quad u_4^L(t) \quad u_5^L(t)]^T = \sum_{i \in \mathcal{I}} \phi_i q_i(t) \quad (53)$$

$$\mathcal{I} = \begin{cases} \{1\} & \text{if } \omega_p < \omega_{n_1} \\ \{j, j+1\} & \text{if } \omega_{n_j} \leq \omega_p \leq \omega_{n_{j+1}}, j = 1, 2, 3, 4 \\ \{5\} & \text{if } \omega_p > \omega_{n_5} \end{cases} \quad (54)$$

The scatterplot in Figure 4b plots the HF response vs. the LF response for  $10^6$  random samples of the input  $\mathbf{x}$ , depicting the complicated relationship between the LF and HF models. Clearly, the covariance between these models is challenging to conceptualize, which begs the question of whether the optimal CV parameter can be meaningfully estimated. With this in mind, we once again compare CVIS against MFIS and E-ACV. Table 3 lists the sample allocations for each method, which are again constructed to ensure that all three methods use the same computational budget.

Sampling Procedure	Importance Sampling		Subset Simulation		Monte Carlo Integration	
	HF Calls	LF Calls	HF Calls	LF Calls	HF Calls	LF Calls
CVIS	40,000	40,000	-	$5,000 \times M_S$	-	-
MFIS	40,000	40,000	-	$2,500 \times M_S$	-	$2,500 \times M_S$
E-ACV	40,000	40,000	-	$2,500 \times M_S$	-	$2,500 \times M_S$

Table 3: Example 2: Sample allocation summary.  $M_S$  is the number of subsets required by the Subset Simulation procedure.

The results of this comparison are presented in Table 4, which shows the predicted failure probabilities for all three methods and the associated uncertainty (CoV) in the failure probability predictions. Note that for E-ACV we use the estimator presented in [35], while for MFIS and CVIS, we use the Replicated Batch Means (RBM) estimator mentioned in Section 4. Since a significant number of relatively short chains are used to ensure proper exploration of the ISD, the batch size  $b$  for the RBM method is taken to be the full length of each chain. For reference, Crude Monte Carlo using

the HF model with  $10^6$  samples is used to compute the true failure probability. The values for all three methods are very close to the true failure probability, indicating that all three are equally accurate for the same computational budget. The sample CoV, as well as the predicted CoV, further show that all three methods achieve comparable precision. Thus, we highlight the fact that CVIS is able to provide benefits above existing methods like MFIS or E-ACV without a drop in performance; these benefits include being able to circumvent estimation of the inter-model covariance calculations and ISD normalization constant, as well as the ability to better analyze the performance of the estimator (through the  $\kappa$  diagnostic and the ability to account for the uncertainty in  $\tilde{\alpha}$ ). (See Sections 1.2 and 3.1.3 for discussions of the benefits of CVIS.)

Algorithm	Estimated $\hat{P}_F$		Estimated CoV $[\hat{P}_F]$	
	Sample Mean	Sample CoV	Sample Mean	Sample CoV
CVIS	4.26 E-3	12.73%	13.46%	5.35%
MFIS	4.33 E-3	13.75%	11.36%	7.62%
E-ACV	4.30 E-3	13.50%	11.59%	8.16%

Target  $P_F$  | 4.27 E-3 (Computed using Crude Monte Carlo with  $10^6$  samples)

Table 4: Example 2: The mean and coefficient of variation (CoV) of the predicted failure probability for the CVIS, MFIS, and E-ACV methods, computed from 100 independent trials. For each trial the CoV of the failure probability was also estimated. The sample mean and CoV of these predictions from the 100 trials are also listed.

#### 5.4 Example 3: Lid-driven Cavity Problem

Finally, we consider a numerical model of steady-state incompressible fluid flow: the four-sided lid-driven cavity problem. Here, fluid flow occurs in a 2-dimensional square-shaped domain as shown in Figure 5a. The kinematic viscosity  $\nu$  and the density  $\rho$  of the fluid are both considered random variables, and the velocity at any point in the cavity is denoted by  $\mathbf{U}(x, y) \equiv \mathbf{U} = [U_x \ U_y]^T$ . Stochastic velocities  $U_x^{(1)}$ ,  $U_y^{(1)}$ ,  $U_x^{(2)}$ , and  $U_y^{(2)}$  are applied at the four boundaries of the square domain resulting in the following six-dimensional random vector of inputs:  $\mathbf{X} = [U_x^{(1)} \ U_x^{(2)} \ U_y^{(1)} \ U_y^{(2)} \ \rho \ \nu]^T$ . Table 5 lists the distributions for each random variable.

Random Variable	Distribution	Parameters
$\ln(U_x^{(1)})$ , $\ln(U_y^{(1)})$ , $\ln(U_x^{(2)})$ , and $\ln(U_y^{(2)})$	Truncated Normal	Mean = $\ln(0.75)$ , Variance = 0.0625 Domain = [0.5, 1.5]
$\rho$	Uniform	Domain = [0.5, 1.5]
$\ln(\nu)$	Truncated Normal	Mean = $\ln(0.025)$ , Variance = 0.25 Domain = [ $\ln(0.005)$ , $\ln(0.05)$ ]

Table 5: Example 3: Distributions of the random variables.

At any point in the interior of the domain, the fluid velocity  $\mathbf{U}$  can be solved using either the incompressible Navier-Stokes equations

$$\begin{aligned} \frac{1}{\rho} \nabla p + \nabla \cdot (\nu \nabla \mathbf{U}) &= (\mathbf{U} \cdot \nabla) \mathbf{U} \\ \nabla \cdot \mathbf{U} &= 0 \end{aligned} \quad (55)$$

(where  $p$  is the pressure) or using the Stokes approximation, which ignores the non-linear convective term

$$\begin{aligned} \frac{1}{\rho} \nabla p + \nabla \cdot (\nu \nabla \mathbf{U}) &= 0 \\ \nabla \cdot \mathbf{U} &= 0 \end{aligned} \quad (56)$$

For our example, we solve for the velocity magnitude at the center of the domain (point  $(0, 0)$  in Figure 5a) and define failure as velocity magnitude exceeding 0.75 units. The HF model (Eq. (57)) uses the Navier-Stokes equations, while the LF model (Eq. (58)) uses the Stokes approximations, such that the models can be expressed as

$$H(\mathbf{x}) = 0.75 - \|\mathbf{U}_H(0, 0)\|_2 \quad (57)$$

$$L(\mathbf{x}) = 0.75 - \zeta_L \|\mathbf{U}_L(0, 0)\|_2 \quad (58)$$

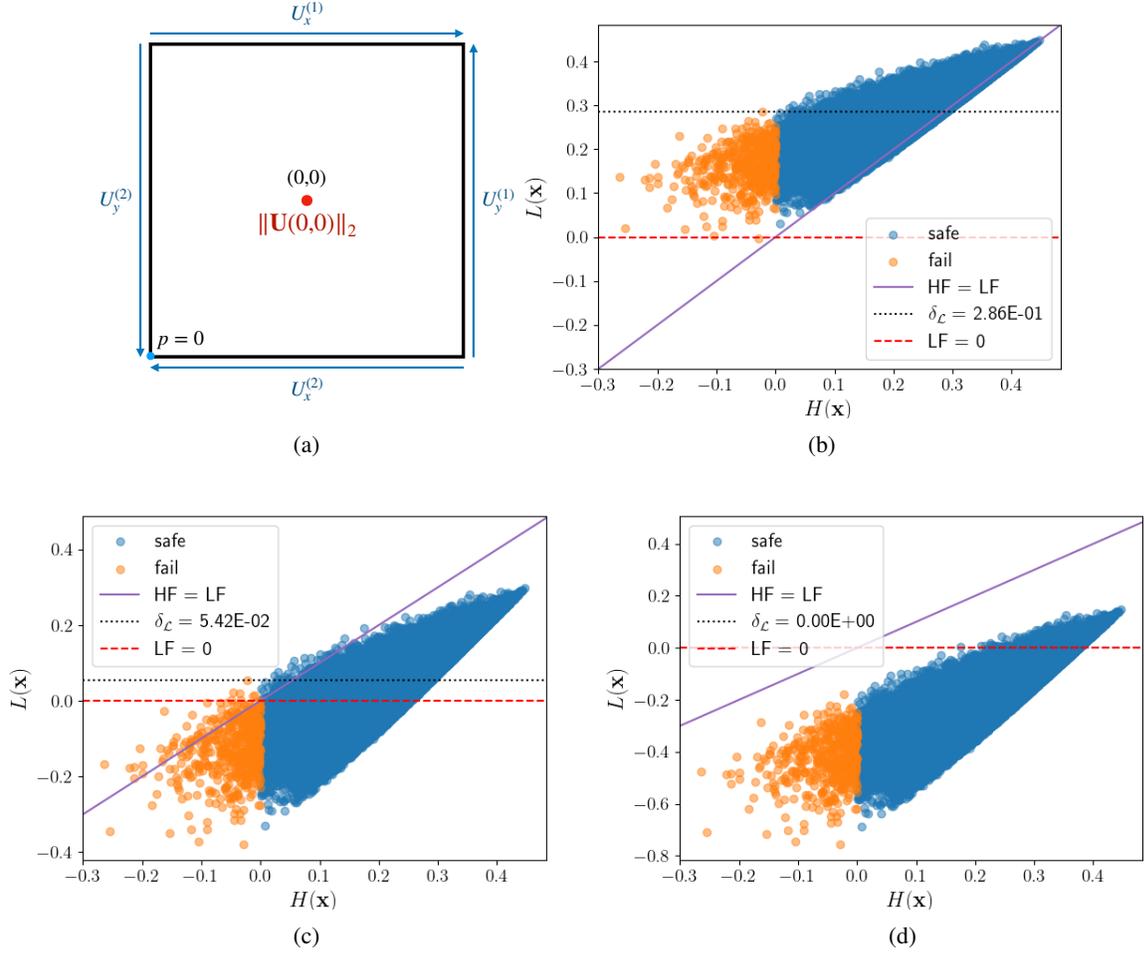


Figure 5: Visualizations for example 3. Figure (a) shows the flow domain for the four-sided lid-driven cavity problem, while figures (b), (c), and (d) show scatterplots of HF response predictions vs. LF response predictions for  $\zeta_L = 1.0, 1.5,$  and  $2.0,$  using 200,000 samples. The points are colored according to the HF model predictions; blue points correspond to safety, and orange points correspond to failure. On the other hand, the LF model predicts failure in all samples under the red dashed line.

where  $\mathbf{U}_H$  is the solution to Eq. (55) and  $\mathbf{U}_L$  is the solution for Eq. (56). Velocities are solved using the Navier-Stokes module [44] in the Multi-physics Object-Oriented Simulation Environment (MOOSE) [45, 46].  $\zeta_L$  is a factor that allows us to non-intrusively modify the model relationship between the HF and LF models, effectively adjusting  $\delta_{\mathcal{L}}$ . The effect of changing  $\zeta_L$  is shown in Figure 5, showing that it shifts the LF model output relative to the limit surface  $L(\mathbf{x}) = 0$ .

Table 6 shows a set of diagnostics for the CVIS method for different values of  $\zeta_L$ . First, we see that the Stokes approximation loses its predictive accuracy for larger flow velocities, as is clear from the deteriorating correlation between  $H(\mathbf{x})$  and  $L(\mathbf{x})$  for values in the failure domain  $\mathbf{x} \in \Omega_{\mathcal{F}}$ . Not only does this complicate the idea of inter-model covariance for use in a standard CV framework, but it also means that  $L(\mathbf{x})$  vastly underestimates failure for  $\zeta_L = 1.0$ . The large value of  $\delta_{\mathcal{L}} = 0.286$  for this case (see Remark 1) suggests that Stipulation 1 is not satisfied. This is confirmed by computing the diagnostic  $\kappa$  value (last column in Table 6), which indicates quite strongly ( $\kappa$  is much less than 0.5) that the CVIS algorithm will not yield a variance reduction in this case. However, by changing the  $\zeta_L$  value, we can improve the value of  $\kappa$ . (It is important to remember that  $\kappa$  is a classifier - larger values of  $\kappa$  do not imply more variance reduction. By “improving”  $\kappa$ , we refer only to changing the relationship between the HF and LF models such that  $\kappa \geq 0.5$ , which ensures variance reduction according to Theorem 4. In particular, the  $\kappa$  criterion cannot be used to distinguish between the performance of  $\zeta_L = 1.5$  and  $\zeta_L = 2.0$ .)

$\zeta_L$ Value	$\rho [H(\mathbf{X}), L(\mathbf{X})]$		$\rho [I_H(\mathbf{X}), I_L(\mathbf{X})]$	$\kappa$ (Eq. (31))	$\delta_{\mathcal{L}}$ (Remark 1)
	$\mathbf{x} \in \Omega$	$\mathbf{x} \in \Omega_{\mathcal{F}}$			
1.0	0.89	0.26	0.045	1.99 E-3	2.86 E-1
1.5	0.89	0.26	0.100	9.84 E-1	5.42 E-2
2.0	0.89	0.26	0.012	1.0	0.00

Table 6: Example 3: Model Relationship diagnostics. All reported values were calculated by Crude Monte Carlo estimation using 200,000 samples.

Due to the computational expense of the models, only one CVIS run was conducted with  $\zeta_L = 1.5$ . This run used 100 chains with 400 samples each for the DE-MC procedure (i.e., the IS estimators) and 5,000 samples per subset for the LF SuS procedure to estimate  $\tilde{P}_{FL}$ . Table 7 presents the CVIS prediction and the corresponding estimated CoV. We see that CVIS very accurately predicts the failure probability with reasonable precision.

Algorithm	$\tilde{P}_F$	CoV $[\tilde{P}_F]$	Total Model Calls
CVIS	2.95 E-3	15.81 %	40,000 HF + 45,000 LF
Target $P_F$	2.51 E-3 (Computed using Crude Monte Carlo with $2 \times 10^9$ samples)		

Table 7: Example 3: CVIS Prediction

## 6 Conclusions

In this work, we present the CVIS estimator, a statistical estimator for rare-event reliability analysis that couples control variates and importance sampling under a bifidelity modeling paradigm. Instead of focusing purely on optimal variance reduction, emphasis is placed on robustness, simplicity, and various quality-of-life improvements, including (a) an importance sampling density constructed to fully represent system response information from the Low Fidelity model and explicitly consider false-positive safety predictions, (b) a control variates formulation that circumvents the need for knowing or estimating any model correlation information, (c) a variance-reduction diagnostic at no additional cost, (d) an estimator construction that does not require complicated optimization routines to determine operating parameters and allows for plug-and-play style incorporation of multiple sampling strategies by functioning with samples from unnormalized distributions, and (e) a closed-form variance estimator that incorporates all sources of uncertainty in an easily separable form. The proposed estimator is backed up by rigorous mathematical proofs and nuanced discussions of its strengths and weaknesses. Finally, it is tested against established methods such as *Multifidelity Importance Sampling* (Peherstorfer et al. [28]) and *Ensemble Approximate Control Variates* (Pham & Gorodetsky [35]) on a number of analytical and numerical examples. Through these case studies, the CVIS estimator was found to perform as well as or better than its counterparts while providing the aforementioned practical benefits (that are not all available from the existing methods in the literature).

## A Considerations for Practical Implementation

This appendix contains short discussions on a variety of practical considerations that arise when applying the proposed CVIS algorithm.

### A.1 Tuning the ISD

Here, we first explain the optimization problem presented in Remark 2. We then provide a heuristic to compute  $\beta^*$  in practice that avoids solving an optimization problem.

#### A.1.1 Explaining the ‘‘Optimally-tuned’’ ISD Definition (Remark 2)

Recall the definition of  $q_{\mathbf{x}}(\mathbf{x}, \beta)$  from Eq. (24), and then consider Figure 6, which illustrates the behavior of  $S_L(\mathbf{x}, \beta)$  for different values of  $\beta$  across a wide range of values  $L(\mathbf{x})$  (x-axis).

Recall the definitions of  $\delta_{\mathcal{L}}$  and the corresponding  $\Omega_{\mathcal{L}}$  from Section 3.1.1. By definition,  $\Omega_{\mathcal{L}} = \{\mathbf{x} \in \Omega : L(\mathbf{x}) < \delta_{\mathcal{L}}\}$  is the region on the horizontal axis of Figure 6 having  $L(\mathbf{x}) < \delta_{\mathcal{L}}$ . Consequently,  $\Omega_{\mathcal{L}}^C$  is the region on the horizontal

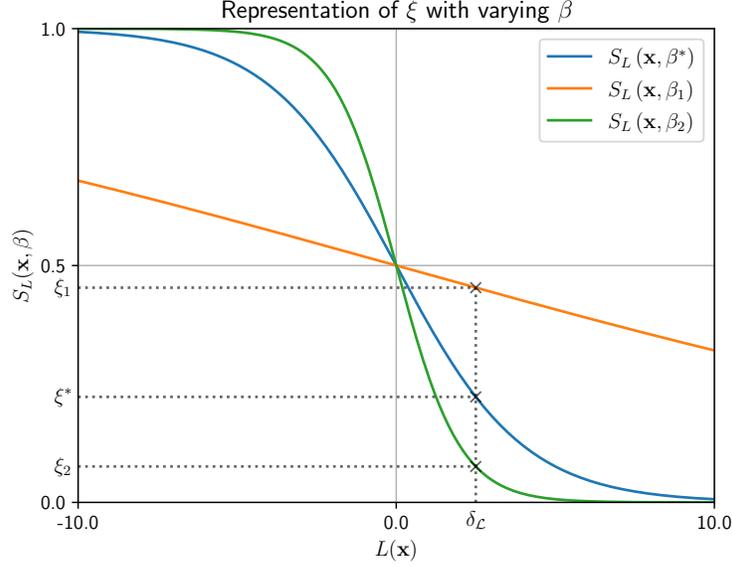


Figure 6: The shape of  $S_L(\mathbf{x}, \beta)$  vs.  $L(\mathbf{x})$  for three different values of  $\beta$ . The blue curve represents the optimally tuned ISD (i.e.,  $\beta = \beta^*$ ), while the orange curve represents a logistic that is too flat ( $\beta = \beta_1 < \beta^*$ ) and the green curve represents a logistic that is too sharp ( $\beta = \beta_2 > \beta^*$ ). The values of the three curves at  $L(\mathbf{x}) = \delta_{\mathcal{L}}$  are also marked on the graph as  $\xi^*$ ,  $\xi_1$ , and  $\xi_2$  for  $\beta = \beta^*$ ,  $\beta = \beta_1$ , and  $\beta = \beta_2$ , respectively.

axis having  $L(\mathbf{x}) > \delta_{\mathcal{L}}$ . Since  $S_L(\mathbf{x}, \beta)$  is a monotonically decreasing function, the condition  $S_L(\mathbf{x}, \beta) \geq \xi \forall \mathbf{x} \in \Omega_{\mathcal{L}}$  is satisfied if  $S_L(\mathbf{x}, \beta) = \xi$  when  $L(\mathbf{x}) = \delta_{\mathcal{L}}$ .

We then rewrite the integral in the objective function from Remark 2 as

$$\int_{\Omega_{\mathcal{L}}^C} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta) d\mathbf{x} = \int_{\delta_{\mathcal{L}}}^{\infty} C_S^{-1} S_L(\mathbf{x}, \beta) f_L(L(\mathbf{x})) dL(\mathbf{x}) \quad (59)$$

where we use the definition of  $\mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta)$  to express the integral over the input space as a one-dimensional integral over possible values of the LF response function  $L(\mathbf{x})$ . To do so, we define  $f_L(L(\mathbf{x}))$  through the line integral of  $f_{\mathbf{X}}(\mathbf{x})$  along any given contour of  $L(\mathbf{x})$ . This also leads to the following relations

$$P_{F_L} = \int_{-\infty}^0 f_L(L(\mathbf{x})) dL(\mathbf{x}) \quad (60)$$

$$P_F \leq \int_{-\infty}^{\delta_{\mathcal{L}}} f_L(L(\mathbf{x})) dL(\mathbf{x}) \quad (61)$$

where Eq. (61) results as a consequence of the fact that  $\Omega_{\mathcal{F}} \subseteq \Omega_{\mathcal{L}}$ .

The optimization problem in Remark 2 represents a balance between two terms: the integral in Eq. (59) and the product  $\lambda\xi$ . According to the second term, we want  $\xi$  to be as large as possible ( $\beta$  as small as possible) such that the ISD has a significant density in regions of  $\Omega_{\mathcal{L}}$ , and therefore  $\Omega_{\mathcal{F}}$  by extension (as  $\Omega_{\mathcal{F}} \subseteq \Omega_{\mathcal{L}}$ ), that are not a part of the LF failure region. However, when  $\beta$  is too small the logistic is too flat, and the ISD has too much density in  $\Omega_{\mathcal{L}}^C$  as illustrated by the orange curve in Figure 6. Conversely, simply minimizing the integral in Eq. (59) leads to large  $\beta$  values (and therefore small  $\xi$  values) such that the ISD does not have sufficient density in the region  $0 \leq L(\mathbf{x}) \leq \delta_{\mathcal{L}}$ , as illustrated by the green curve in Figure 6. This makes it difficult to generate samples from HF failure regions that the LF model misclassifies as safe.

This conflict occurs because the logistic curve pivots around the point  $L(\mathbf{x}) = 0$ , where  $S_L(\mathbf{x}, \beta) = 0.5$  regardless of  $\beta$ . Since our region of interest extends from  $L(\mathbf{x}) = -\infty$  up to  $L(\mathbf{x}) = \delta_{\mathcal{L}}$ , we must balance the inclusion of favorable density in the region  $0 \leq L(\mathbf{x}) \leq \delta_{\mathcal{L}}$  against the resulting unfavorable density in the region  $L(\mathbf{x}) > \delta_{\mathcal{L}}$ . Such a balance is illustrated by the blue curve in Figure 6.

### A.1.2 Intuition behind the ISD Parameter Selection

When Subset Simulation is applied in practice, each response function threshold value  $b_i$  (see Section 4) is defined adaptively such that the probability  $P(\mathbf{x} \in \mathcal{S}_i | \mathbf{x} \in \mathcal{S}_{i-1}) = P_{i|i-1} = \pi_0$  ( $\forall i = 1, 2, \dots, M_S - 1$ ), where  $\pi_0$  is some pre-defined probability threshold, and the stopping criterion is such that  $P_{M_S|(M_S-1)} \geq \pi_0$ . Here, we aim to use these response function threshold values and the associated probabilities to estimate a reasonable value of  $\beta^*$  directly, without having to compute  $\delta_{\mathcal{L}}$  (see Section 3.1.1).

Remember that Stipulation 1 is interpreted as the LF model failure surface (defined by the curve  $L(\mathbf{x}) = 0 = b_{M_S}$ ) lying “close to or before” the HF model failure surface. Therefore, we argue that the curve defined by  $L(\mathbf{x}) = b_{M_S-1}$  is likely to be a conservative approximation of the HF model failure surface. Additionally,  $P_{M_S|(M_S-1)}$  gives an estimate of the volume of probability space between the curves  $L(\mathbf{x}) = b_{M_S-1}$  and  $L(\mathbf{x}) = 0 = b_{M_S}$ . If this probability is small, then the two curves are “far” apart. Conversely, if the probability is large, then the two curves are close to one another. We use this information to qualitatively judge the likelihood that  $b_{M_S-1} \geq \delta_{\mathcal{L}}$ , and hence guide our selection of  $\beta^*$ .

According to Theorem 1, if we assign a desirable value to  $S_L(\mathbf{x}_t, \beta^*)$  at some point  $\mathbf{x}_t$  where  $L(\mathbf{x}_t)$  is known, then we can identify a unique value of  $\beta^*$ . Consequently, using the argument above, we suggest the following approach to select  $\beta^*$ :

$$S_L(\mathbf{x}_t, \beta^*) = \frac{P_{M_S|(M_S-1)}}{2}, \quad L(\mathbf{x}_t) = \frac{b_{M_S-1} + b_{M_S}}{2} \quad (62)$$

$$\Rightarrow \beta^* = \frac{2}{b_{M_S-1}} \ln \left( \frac{2}{P_{M_S|(M_S-1)}} - 1 \right) \quad (63)$$

Also, the following theorem can be readily shown from the estimators presented in [7]:

**Theorem 6** *If a total of  $N_s$  samples are generated as part of the Subset Simulation procedure, then*

$$\text{Var} \left[ \tilde{P}_{F_L} \right] = \frac{M_S}{N_s} O \left( P_{F_L}^2 \ln(1/P_{F_L}) \right) \quad (64)$$

Therefore, a Subset Simulation estimator follows the conditions required in Theorems 3 and 4 when  $N_s \approx M_S N$  (where  $N$  is the number of samples generated to compute the CMC estimate  $\hat{Q}_L$ , as required in the aforementioned theorems).

## A.2 Initializing the DE-MC Sampler

To seed the MCMC sampler, use the samples generated during Subset Simulation to compute  $\tilde{P}_{F_L}$  that lie in the LF failure region. Therefore, these samples also lie within the main support of  $q_{\mathbf{x}}(\mathbf{x}, \beta^*)$ . A weighted selection scheme can be used to select the seeds for the DE-MC procedure in such a way that the seeds also follow the target distribution, and therefore no burn-in is necessary to achieve convergence for the MCMC scheme. Although this introduces some correlation between  $\tilde{P}_{F_L}$  and  $\tilde{Q}$  or  $\tilde{Q}_L$ , the number of samples shared between the SuS and IS procedures are very small compared to the total number of samples generated in each method, which suggests that any correlation will be negligible. Additionally, a small burn-in length can be easily introduced for a few additional LF model calls (which is considerably cheaper than the HF model), which can effectively remove any correlations between the estimators for practical purposes.

## A.3 Statistics of MCMC Sampling-based Estimators

The Markov Chain Central Limit Theorem [47] allows us to derive statistics for estimators that use samples generated as states of one or multiple parallel independent Markov Chains. In general, let  $\pi_{\mathcal{X}}$  be a probability distribution defined in a measurable space  $\Omega_{\mathcal{X}}$  and  $\Psi : \Omega_{\mathcal{X}} \rightarrow \mathbb{R}^d$  be a function, and say we are interested in estimating  $\mu_{\Psi} = \int_{\Omega_{\mathcal{X}}} \Psi(\omega) \pi_{\mathcal{X}}(\omega) d\omega$ . Then, if  $\{\mathcal{X}_{k,t}\}$  ( $t = 1, 2, \dots$  and  $k = 1, 2, \dots, \mathcal{C}$ ) denote  $\mathcal{C}$  independent ergodic Markov Chains each following the target distribution  $\pi_{\mathcal{X}}$ , we can construct an estimator  $\hat{\mu}_{\Psi}$  as

$$\hat{\mu}_{\Psi} = \sum_{k=1}^{\mathcal{C}} \sum_{t=1}^{\mathcal{T}} \frac{\Psi(\mathcal{X}_{k,t})}{\mathcal{C}\mathcal{T}} \quad (65)$$

where  $\mathcal{T}$  is the number of states considered. The Markov Chain Central Limit Theorem (CLT) states that, as  $\mathcal{T} \rightarrow \infty$ ,

$$\sqrt{\mathcal{C}\mathcal{T}} (\hat{\mu}_{\Psi} - \mu_{\Psi}) \xrightarrow{dist.} \mathcal{N}(0, \Sigma_d) \quad (66)$$

where  $\Sigma_d$  is a  $d$ -dimensional covariance matrix called the asymptotic variance for the Markov Chain, defined as

$$\begin{aligned} \Sigma_d &= \text{Cov} [\Psi(\mathcal{X}_{k,t})] + 2 \sum_{\tau=1}^{\infty} \text{Cov} [\Psi(\mathcal{X}_{k,t}), \Psi(\mathcal{X}_{k,t+\tau})] \\ &\text{i.e., } \Sigma_d = \Gamma(0) + 2 \sum_{\tau=1}^{\infty} \Gamma(\tau) \end{aligned} \quad (67)$$

Note that since all the chains are ergodic (therefore also stationary) and follow the target distribution,  $\Sigma_d$  is the same regardless of the value of  $k$  and  $t$ . Thus, for ease of notation, we represent  $\text{Cov} [\Psi(\mathcal{X}_{k,t}), \Psi(\mathcal{X}_{k,t+\tau})]$  by  $\Gamma(\tau)$ . By extension,  $\Gamma(0) = \text{Cov} [\Psi(\mathcal{X}_{k,t}), \Psi(\mathcal{X}_{k,t})] = \text{Cov} [\Psi(\mathcal{X}_{k,t})]$ .

The Markov Chain CLT is used to derive the statistical properties of our estimate  $\hat{\mu}_\Psi$ ; for any fixed and sufficiently large value of  $\mathcal{C}$  and  $\mathcal{T}$ , Eq. (66) can be rewritten as

$$\hat{\mu}_\Psi \sim \mathcal{N} \left( \mu_\Psi, \frac{1}{\mathcal{C}\mathcal{T}} \Sigma_d \right) \quad (68)$$

Clearly, to assign uncertainty bounds on  $\hat{\mu}_\Psi$ , we need to estimate  $\Sigma_d$ . A naive estimate of  $\Sigma_d$  can be constructed by individually estimating each of the terms in the right-hand-side sum of Eq. (67) from finite length chains (i.e.,  $\mathcal{T} < \infty$ ) and then summing them up.

We can estimate  $\Gamma(0)$  and  $\Gamma(\tau)$  for each individual chain (i.e.  $k = 1, \dots, \mathcal{C}$ ) as  $\hat{\Gamma}_k(0)$  and  $\hat{\Gamma}_k(\tau)$  in the following way

$$\begin{aligned} \hat{\Gamma}_k(0) &= \frac{1}{\mathcal{T}-1} \sum_{t=1}^{\mathcal{T}} [\Psi(\mathcal{X}_{k,t}) - \bar{\Psi}_k] [\Psi(\mathcal{X}_{k,t}) - \bar{\Psi}_k]^T \\ \hat{\Gamma}_k(\tau) &= \frac{1}{\mathcal{T}-\tau} \sum_{t=1}^{\mathcal{T}-\tau} [\Psi(\mathcal{X}_{k,t}) - \bar{\Psi}_k] [\Psi(\mathcal{X}_{k,t+\tau}) - \bar{\Psi}_k]^T \end{aligned} \quad (69)$$

where  $\bar{\Psi}_k = \mathcal{T}^{-1} \sum_{t=1}^{\mathcal{T}} \Psi(\mathcal{X}_{k,t})$ . Thus, the naive estimator of  $\Sigma_d$  for each chain can be written as

$${}_k \hat{\Sigma}_{d,\text{naive}} = \hat{\Gamma}_k(0) + 2 \sum_{\tau=1}^{\mathcal{T}-1} \hat{\Gamma}_k(\tau) \quad (70)$$

and for all chains taken together as

$$\hat{\Sigma}_{d,\text{naive}} = \frac{1}{\mathcal{C}} \sum_{k=1}^{\mathcal{C}} {}_k \hat{\Sigma}_{d,\text{naive}} \quad (71)$$

Note that the maximum value possible for  $\tau$  when each chain has a finite length  $\mathcal{T}$  is  $\mathcal{T} - 1$ .

Unfortunately, it is well known that  ${}_k \hat{\Sigma}_{d,\text{naive}}$  is not a consistent estimator of the asymptotic variance, i.e.,  $\text{Var} [{}_k \hat{\Sigma}_{d,\text{naive}}] \not\rightarrow 0$  as  $\mathcal{T} \rightarrow \infty$  [47, 48, 49]. Since  $\mathcal{C}$  is usually fixed a priori by external considerations, this implies that the variance in  $\hat{\Sigma}_{d,\text{naive}}$  does not decrease as data is increased. Therefore, the problem of estimating the asymptotic variance for Markov Chains (for both single chains and multiple parallel chains) has received significant attention in the literature. There are various types of estimators to do so, such as Initial Sequence Estimators [48], Spectral Window Methods [50], and Batch Means Methods [41, 42]. Further, work has also been done in exploring the optimal parameters for these estimators [51, 52] as well as improving the overall quality of the estimates [53].

## B Proofs, Additional Theorems, and Mathematical Derivations

This Appendix presents proofs for the theorems presented in the manuscript and provides some additional theorems and derivations to facilitate the understanding of the theory supporting our framework.

### B.1 Proof of Theorem 2

**Proof 1 (Proof of Theorem 2)** *Considering that  $\hat{P}_{FL}$  is independent from  $\hat{Q}$  and  $\hat{Q}_L$ , the variance of  $\hat{P}_{FCVMC}$  can be written from Eq. (16) as follows*

$$\text{Var} [\hat{P}_{FCVMC}] = \text{Var} [\hat{Q}_{MC}] + \alpha^2 \text{Var} [\hat{Q}_{LMC}] + \alpha^2 \text{Var} [\hat{P}_{FL}] - 2\alpha \text{Cov} [\hat{Q}_{MC}, \hat{Q}_{LMC}] \quad (72)$$

Applying Monte Carlo estimators for  $\hat{Q}_{MC}$  and  $\hat{Q}_{LMC}$ , we get the following simplification

$$\text{Var} \left[ \hat{P}_{FCVMC} \right] = \frac{\text{Var}_f [I_H]}{N} + \alpha^2 \frac{\text{Var}_f [I_L]}{N} + \alpha^2 \text{Var} \left[ \hat{P}_{FL} \right] - 2\alpha \frac{\text{Cov}_f [I_H, I_L]}{N} \quad (73)$$

Here,  $\text{Var}_f [\cdot]$  and  $\text{Cov}_f [\cdot]$  represent the variance and covariance operators with respect to the distribution  $f_{\mathbf{x}}(\mathbf{x})$ .

Similarly, the variance of  $\hat{P}_{FCVIS}$  can be written from Eq. (17) as

$$\text{Var} \left[ \hat{P}_{FCVIS} \right] = \text{Var} \left[ \hat{Q}_{IS} \right] + \alpha^2 \text{Var} \left[ \hat{Q}_{LIS} \right] + \alpha^2 \text{Var} \left[ \hat{P}_{FL} \right] - 2\alpha \text{Cov} \left[ \hat{Q}_{IS}, \hat{Q}_{LIS} \right] \quad (74)$$

$$= C_S^2 \frac{\text{Var}_q \left[ \frac{I_H}{S_L} \right]}{N} + \alpha^2 C_S^2 \frac{\text{Var}_q \left[ \frac{I_L}{S_L} \right]}{N} + \alpha^2 \text{Var} \left[ \hat{P}_{FL} \right] - 2\alpha C_S^2 \frac{\text{Cov}_q \left[ \frac{I_H}{S_L}, \frac{I_L}{S_L} \right]}{N} \quad (75)$$

Note that dependence on  $\mathbf{x}$  has been dropped for simplicity in notation.

Using the definition of the variance and covariance operators, we can expand Eq. (73) as

$$\text{Var} \left[ \hat{P}_{FCVMC} \right] = T_1^{(CVMC)} + T_2^{(CVMC)} \quad (76)$$

$$T_1^{(CVMC)} = \frac{\mathbb{E}_f [I_H^2]}{N} + \alpha^2 \frac{\mathbb{E}_f [I_L^2]}{N} - 2\alpha \frac{\mathbb{E}_f [I_H I_L]}{N} \quad (77)$$

$$T_2^{(CVMC)} = \alpha^2 \text{Var} \left[ \hat{P}_{FL} \right] - \left\{ \frac{(\mathbb{E}_f [I_H])^2}{N} + \alpha^2 \frac{(\mathbb{E}_f [I_L])^2}{N} - 2\alpha \frac{\mathbb{E}_f [I_H] \mathbb{E}_f [I_L]}{N} \right\} \quad (78)$$

Similarly, the expansion of Eq. (75) is

$$\text{Var} \left[ \hat{P}_{FCVIS} \right] = T_1^{(CVIS)} + T_2^{(CVIS)} \quad (79)$$

$$T_1^{(CVIS)} = C_S^2 \left\{ \frac{\mathbb{E}_q \left[ \left( \frac{I_H}{S_L} \right)^2 \right]}{N} + \alpha^2 \frac{\mathbb{E}_q \left[ \left( \frac{I_L}{S_L} \right)^2 \right]}{N} - 2\alpha \frac{\mathbb{E}_q \left[ \left( \frac{I_H}{S_L} \right) \left( \frac{I_L}{S_L} \right) \right]}{N} \right\} \quad (80)$$

$$T_2^{(CVIS)} = \alpha^2 \text{Var} \left[ \hat{P}_{FL} \right] - C_S^2 \left\{ \frac{(\mathbb{E}_q \left[ \frac{I_H}{S_L} \right])^2}{N} + \alpha^2 \frac{(\mathbb{E}_q \left[ \frac{I_L}{S_L} \right])^2}{N} - 2\alpha \frac{\mathbb{E}_q \left[ \frac{I_H}{S_L} \right] \mathbb{E}_q \left[ \frac{I_L}{S_L} \right]}{N} \right\} \quad (81)$$

Using lemma 1, we can say that  $T_2^{(CVIS)} = T_2^{(CVMC)}$  for all values of  $\alpha$ . Therefore, to prove the theorem, we simply need to show that  $T_1^{(CVIS)} \leq T_1^{(CVMC)}$ .

Next, recognizing that  $I_H^2 = I_H$  and  $I_L^2 = I_L$ , we can use lemma 2 to expand  $T_1^{(CVMC)}$  (Eq. (77)) in the following manner

$$\begin{aligned} T_1^{(CVMC)} &= \frac{\mathbb{E}_f [I_H^2]}{N} + \alpha^2 \frac{\mathbb{E}_f [I_L^2]}{N} - 2\alpha \frac{\mathbb{E}_f [I_H I_L]}{N} \\ &= \frac{1}{N} \int_{\Omega} I_H^2(\mathbf{x}) f(\mathbf{x}) d\mathbf{x} + \frac{\alpha^2}{N} \int_{\Omega} I_L^2(\mathbf{x}) f(\mathbf{x}) d\mathbf{x} - \frac{2\alpha}{N} \int_{\Omega} I_H(\mathbf{x}) I_L(\mathbf{x}) f(\mathbf{x}) d\mathbf{x} \\ &= \frac{(1-\alpha)^2}{N} \int_{\Omega_{HL}} I_H(\mathbf{x}) I_L(\mathbf{x}) f_{\mathbf{x}}(\mathbf{x}) d\mathbf{x} + \frac{1}{N} \int_{\Omega_{HL}^C} (I_H(\mathbf{x}) + \alpha^2 I_L(\mathbf{x})) f_{\mathbf{x}}(\mathbf{x}) d\mathbf{x} \end{aligned} \quad (82)$$

where  $\Omega_{HL} = \{\mathbf{x} \in \Omega : I_H(\mathbf{x}) I_L(\mathbf{x}) = 1\}$  and  $\Omega_{HL}^C = \Omega \setminus \Omega_{HL}$ . Thus,

$$T_1^{(CVMC)} = T_3^{(CVMC)} + T_4^{(CVMC)} \quad (83)$$

$$T_3^{(CVMC)} = \frac{(1-\alpha)^2}{N} \int_{\Omega_{HL}} I_H(\mathbf{x}) I_L(\mathbf{x}) f_{\mathbf{x}}(\mathbf{x}) d\mathbf{x} \quad (84)$$

$$T_4^{(CVMC)} = \frac{1}{N} \int_{\Omega_{HL}^C} (I_H(\mathbf{x}) + \alpha^2 I_L(\mathbf{x})) f_{\mathbf{x}}(\mathbf{x}) d\mathbf{x} \quad (85)$$

We can similarly expand  $T_1^{(CVIS)}$  (Eq. (80)) as

$$T_1^{(CVIS)} = T_3^{(CVIS)} + T_4^{(CVIS)} \quad (86)$$

$$T_3^{(CVIS)} = \frac{(1-\alpha)^2 C_S^2}{N} \int_{\Omega_{HL}} \frac{I_H(\mathbf{x})I_L(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \quad (87)$$

$$T_4^{(CVIS)} = \frac{C_S^2}{N} \int_{\Omega_{HL}^C} \frac{(I_H(\mathbf{x}) + \alpha^2 I_L(\mathbf{x}))}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \quad (88)$$

For equations 83 - 85 we use lemma 2 with  $r(\mathbf{x}) := 1$  and  $\pi(\mathbf{x}) := f_{\mathbf{X}}(\mathbf{x})$ , while for equations 86 - 88 we use lemma 2 with  $r(\mathbf{x}) := (S_L(\mathbf{x}, \beta^*))^2$  and  $\pi(\mathbf{x}) := \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*)$ .

Finally, we apply lemma 3 to obtain

$$C_S^2 \int_{\Omega_{HL}} \frac{I_H(\mathbf{x})I_L(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \leq \int_{\Omega_{HL}} I_H(\mathbf{x})I_L(\mathbf{x})f_{\mathbf{X}}(\mathbf{x})d\mathbf{x} \quad (89)$$

$$C_S^2 \int_{\Omega_{HL}^C} \frac{I_H(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \leq \int_{\Omega_{HL}^C} I_H(\mathbf{x})f_{\mathbf{X}}(\mathbf{x})d\mathbf{x} \quad (90)$$

$$C_S^2 \int_{\Omega_{HL}^C} \frac{I_L(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \leq \int_{\Omega_{HL}^C} I_L(\mathbf{x})f_{\mathbf{X}}(\mathbf{x})d\mathbf{x} \quad (91)$$

From Eq. (89) we see that  $T_3^{(CVIS)} \leq T_3^{(CVMC)}$ , and from Eqs. (90) and (91) we see that  $T_4^{(CVIS)} \leq T_4^{(CVMC)}$  for arbitrary  $\alpha$ .

Therefore,  $T_1^{(CVIS)} \leq T_1^{(CVMC)}$  for all values of  $\alpha$ , which completes the proof.

**Lemma 1** For  $\lambda \in \{H, L, HL\}$ , where  $I_{HL}(\mathbf{x}) = I_H(\mathbf{x})I_L(\mathbf{x})$  and  $I_H(\mathbf{x})$  and  $I_L(\mathbf{x})$  are as previously defined

$$C_S \mathbb{E}_{\mathbf{q}} \left[ \frac{I_{\lambda}}{S_L} \right] = \mathbb{E}_f [I_{\lambda}] \quad (92)$$

**Proof 2 (Proof of Lemma 1)** By definition

$$C_S \mathbb{E}_{\mathbf{q}} \left[ \frac{I_{\lambda}}{S_L} \right] = C_S \int_{\Omega} \frac{I_{\lambda}(\mathbf{x})}{S_L(\mathbf{x}, \beta^*)} \mathbf{q}_{\mathbf{X}}(\mathbf{x}, \beta^*) d\mathbf{x} \quad (93)$$

Substituting Eq. (24), and recognizing the definition of  $\mathbb{E}_f [I_{\lambda}]$ , we get

$$C_S \mathbb{E}_{\mathbf{q}} \left[ \frac{I_{\lambda}}{S_L} \right] = C_S \int_{\Omega} \frac{I_{\lambda}(\mathbf{x})}{C_S} f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x} = \int_{\Omega} I_{\lambda}(\mathbf{x}) f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x} \quad (94)$$

$$= \mathbb{E}_f [I_{\lambda}] \quad (95)$$

**Lemma 2** Let  $r(\mathbf{x}) : \Omega \rightarrow \mathbb{R}$  be some function of  $\mathbf{x}$  such that  $r(\mathbf{x}) > 0 \forall \mathbf{x} \in \Omega$ , and  $\pi(\mathbf{x})$  be some probability density function on  $\Omega$  (i.e.  $\text{supp}(\pi(\mathbf{x})) = \Omega$ ). Then, for  $\lambda \in \{H, L\}$ ,

$$\int_{\Omega} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} = \int_{\Omega_{HL}} \frac{I_{HL}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} + \int_{\Omega_{HL}^C} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} \quad (96)$$

where  $\Omega_{HL} = \{\mathbf{x} \in \Omega : I_{HL}(\mathbf{x}) = 1\}$ ,  $\Omega_{HL}^C = \Omega \setminus \Omega_{HL}$ ,  $I_{HL}(\mathbf{x})$  is as defined in lemma 1, and  $I_H(\mathbf{x})$  and  $I_L(\mathbf{x})$  are as previously defined.

**Proof 3 (Proof of Lemma 2)** Notice that by definition,  $I_{HL}(\mathbf{x}) = 1 \Rightarrow I_{\lambda}(\mathbf{x}) = 1$ . Therefore,  $I_{\lambda}(\mathbf{x}) = I_{HL}(\mathbf{x}) \forall \mathbf{x} \in \Omega_{HL}$

Now, by decomposing the integral over  $\Omega$  into two integrals over the non-overlapping regions  $\Omega_{HL}$  and  $\Omega_{HL}^C$  (by definition  $\Omega_{HL} \cup \Omega_{HL}^C = \Omega$ ), we can write the following

$$\int_{\Omega} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} = \int_{\Omega_{HL}} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} + \int_{\Omega_{HL}^C} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} \quad (97)$$

$$= \int_{\Omega_{HL}} \frac{I_{HL}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} + \int_{\Omega_{HL}^C} \frac{I_{\lambda}(\mathbf{x})}{r(\mathbf{x})} \pi(\mathbf{x}) d\mathbf{x} \quad (98)$$

**Lemma 3** Given a set  $\Omega_s \subseteq \Omega$ , if  $\lambda \in \{H, L, HL\}$ , where  $I_{HL}(\mathbf{x})$  is as defined in lemma 1 and  $I_H(\mathbf{x})$  and  $I_L(\mathbf{x})$  are as previously defined, then

$$C_S^2 \int_{\Omega_s} \frac{I_\lambda(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_\mathbf{x}(\mathbf{x}, \beta^*) d\mathbf{x} \leq \int_{\Omega_s} I_\lambda(\mathbf{x}) f_\mathbf{x}(\mathbf{x}) d\mathbf{x} \quad (99)$$

**Proof 4 (Proof of Lemma 3)** Substituting Eq. (24), we can simplify the left-hand-side

$$C_S^2 \int_{\Omega_s} \frac{I_\lambda(\mathbf{x})}{(S_L(\mathbf{x}, \beta^*))^2} \mathbf{q}_\mathbf{x}(\mathbf{x}, \beta^*) d\mathbf{x} = C_S \int_{\Omega_s} \frac{I_\lambda(\mathbf{x})}{S_L(\mathbf{x}, \beta^*)} f_\mathbf{x}(\mathbf{x}) d\mathbf{x} \quad (100)$$

Next, from remark 2, we know that  $S_L(\mathbf{x}, \beta^*) \geq \xi^* \forall \mathbf{x} \in \Omega_\mathcal{L}$ . Recognizing that  $\Omega_\lambda \subseteq \Omega_\mathcal{L}$ , we infer that  $\forall \mathbf{x} \in \Omega_\lambda$

$$\frac{1}{S_L(\mathbf{x}, \beta^*)} \leq \frac{1}{\xi^*} \quad (101)$$

Recollecting the definition of  $\Omega_\lambda$  and the fact that  $I_\lambda(\mathbf{x})$  only takes values 0 and 1, we can extend Eq. (100) into the following inequality

$$C_S \int_{\Omega_s} \frac{I_\lambda(\mathbf{x})}{S_L(\mathbf{x}, \beta^*)} f_\mathbf{x}(\mathbf{x}) d\mathbf{x} \leq \frac{C_S}{\xi^*} \int_{\Omega_s} I_\lambda(\mathbf{x}) f_\mathbf{x}(\mathbf{x}) d\mathbf{x} \quad (102)$$

Since  $C_S \sim O(P_{FL})$ , and for rare events (and using Stipulation 1)  $P_{FL} \ll 0.5$ ,  $C_S < \xi^*$  for rare events ( $\xi^*$  is bounded between 0 and 0.5). This fact and Eq. (102) taken together prove the lemma.

## B.2 Proof of Theorem 3

**Proof 5 (Proof of Theorem 3)** Consider  $\hat{P}_F^{(CVMC)}$  as defined in Eq. (16) and apply control variates theory to find the value of  $\alpha$  that optimizes variance reduction (Eq. (14)). Let this value of  $\alpha$  be called  $\alpha^*$ . Since  $\hat{P}_{FL}$  is independent of  $\hat{Q}$  and  $\hat{Q}_L$ ,

$$\alpha^* = \frac{\text{Cov}[\hat{Q}, \hat{Q}_L]}{\text{Var}[\hat{Q}_L] + \text{Var}[\hat{P}_{FL}]} \quad (103)$$

From condition 3 of the theorem (i.e.,  $\text{Var}[\hat{P}_{FL}] \ll \text{Var}[\hat{Q}_{LMC}]$ ), we can say  $(\text{Var}[\hat{Q}_L] + \text{Var}[\hat{P}_{FL}]) \approx \text{Var}[\hat{Q}_L]$ . Further, by plugging in the definitions for the estimators and recalling that they use independent samples, we get

$$\alpha^* = \frac{\frac{1}{N} \text{Cov}_f[I_H(\mathbf{x}), I_L(\mathbf{x})]}{\frac{1}{N} \text{Var}_f[I_L(\mathbf{x})]} \quad (104)$$

Next, we expand the variance and covariance operators according to their definitions, and use condition 2 from the statement of the theorem to argue that  $\mathbb{E}_f[I_H(\mathbf{x})] \mathbb{E}_f[I_L(\mathbf{x})] \ll \mathbb{E}_f[I_H(\mathbf{x})I_L(\mathbf{x})]$  and  $(\mathbb{E}_f[I_L(\mathbf{x})])^2 \ll \mathbb{E}_f[(I_L(\mathbf{x}))^2]$ . (To do so we use stipulation 1 to assert that if  $P_F \ll 1$ , then  $P_{FL} \ll 1$ .) Therefore, Eq. (104) further simplifies to

$$\alpha^* = \frac{\mathbb{E}_f[I_H(\mathbf{x})I_L(\mathbf{x})]}{\mathbb{E}_f[(I_L(\mathbf{x}))^2]} \quad (105)$$

Notice that

$$\begin{aligned} \mathbb{E}_f[I_H(\mathbf{x})I_L(\mathbf{x})] &= \int_{\Omega} I_H(\mathbf{x})I_L(\mathbf{x})f_\mathbf{x}(\mathbf{x})d\mathbf{x} \\ &= \int_{\Omega} I_H(\mathbf{x})f_\mathbf{x}(\mathbf{x})d\mathbf{x} - \int_{\Omega_\Delta} I_H(\mathbf{x})f_\mathbf{x}(\mathbf{x})d\mathbf{x} \\ &= \mathbb{E}_f[I_H(\mathbf{x})] - \int_{\Omega_\Delta} I_H(\mathbf{x})f_\mathbf{x}(\mathbf{x})d\mathbf{x} \end{aligned} \quad (106)$$

Also,  $\mathbb{E}_f[(I_L(\mathbf{x}))^2] = \mathbb{E}_f[I_L(\mathbf{x})] = P_{FL}$  and  $\mathbb{E}_f[I_H(\mathbf{x})] = P_F$ . Therefore,

$$\alpha^* = \frac{P_F}{P_{FL}} - \frac{1}{P_{FL}} \int_{\Omega_\Delta} I_H(\mathbf{x})f_\mathbf{x}(\mathbf{x})d\mathbf{x} \quad (107)$$

As  $\Omega_\Delta \rightarrow \emptyset$ ,  $\alpha^* \rightarrow P_F/P_{FL}$ . Finally, note from Eq. (22) and Eq. (20) that  $\tilde{\alpha}$  is an estimate of  $P_F/P_{FL}$ .

### B.3 Proof of Theorem 4 and Corollary 2

**Proof 6 (Proof of Theorem 4)** For variance reduction to occur,  $\text{Var} [\hat{P}_{FCVMC}] - \text{Var} [\hat{Q}_{MC}] \leq 0$ . Expanding  $\text{Var} [\hat{P}_{FCVMC}]$  (see Eq. (72)), and replacing  $\alpha$  with  $\alpha^\dagger$ , this can be expanded into the following. (Recall that  $\alpha^\dagger = P_F/P_{F_L} \neq 0$ .)

$$\alpha^{\dagger 2} \text{Var} [\hat{Q}_{LMC}] + \alpha^{\dagger 2} \text{Var} [\hat{P}_{F_L}] - 2\alpha^\dagger \text{Cov} [\hat{Q}_{MC}, \hat{Q}_{LMC}] \leq 0 \quad (108)$$

$$\Rightarrow \alpha^\dagger \leq \frac{2 \text{Cov} [\hat{Q}_{MC}, \hat{Q}_{LMC}]}{\text{Var} [\hat{Q}_{LMC}] + \text{Var} [\hat{P}_{F_L}]} \quad (109)$$

Next, applying the conditions stated in the theorem to simplify Eq. (109) in the same manner as in the proof of theorem 3, we get

$$\alpha^\dagger \leq \frac{2\mathbb{E}_f [I_H(\mathbf{x})I_L(\mathbf{x})]}{\mathbb{E}_f [(I_L(\mathbf{x}))^2]} \quad (110)$$

Using the definition of  $P_{HL}$  and recognizing that  $\mathbb{E}_f [(I_L(\mathbf{x}))^2] = \mathbb{E}_f [I_L(\mathbf{x})] = P_{F_L}$ , and substituting the definition of  $\alpha^\dagger$ , this becomes

$$\frac{P_F}{P_{F_L}} \leq \frac{2P_{HL}}{P_{F_L}} \quad (111)$$

$$\Rightarrow \kappa = \frac{P_{HL}}{P_F} \geq \frac{1}{2} \quad (112)$$

**Proof 7 (Proof of Corollary 2)** Starting from Eq. (109), we apply the definitions for the estimators as well as condition 3 from theorem 4 (since the corollary requires the same conditions as that theorem), to get

$$\alpha^\dagger \leq \frac{2 \text{Cov}_f [I_H(\mathbf{x}), I_L(\mathbf{x})]}{\text{Var}_f [I_L(\mathbf{x})]} \quad (113)$$

By definition,  $\text{Cov}_f [I_H(\mathbf{x}), I_L(\mathbf{x})] = \rho_{HL} \sqrt{\text{Var}_f [I_H(\mathbf{x})] \text{Var}_f [I_L(\mathbf{x})]}$ . Substituting,

$$\alpha^\dagger \leq 2\rho_{HL} \sqrt{\frac{\text{Var}_f [I_H(\mathbf{x})]}{\text{Var}_f [I_L(\mathbf{x})]}} \quad (114)$$

Since  $I_H(\mathbf{x})$  is a Bernoulli random variable,  $\text{Var}_f [I_H(\mathbf{x})] = P_F - P_F^2$ , and similarly,  $\text{Var}_f [I_L(\mathbf{x})] = P_{F_L} - P_{F_L}^2$ . Further, since the target probability is small, we argue that  $P_F \ll P_F^2$  and  $P_{F_L} \ll P_{F_L}^2$ . (This is similar to the argument made in the proof of theorem 3.)

$$\Rightarrow \alpha^\dagger \leq 2\rho_{HL} \sqrt{\frac{P_F}{P_{F_L}}} \quad (115)$$

Using the definition of  $\alpha^\dagger$ , we get,

$$\alpha^\dagger \leq 2\rho_{HL} \sqrt{\alpha^\dagger} \quad (116)$$

$$\Rightarrow \alpha^\dagger \leq 4\rho_{HL}^2 \quad (117)$$

### B.4 Proof of Theorem 5

**Proof 8 (Proof of Theorem 5)** The procedure used here was first described by Katz et al. [54].

Define the following

$$\mu_H = \mathbb{E} [\tilde{Q}] \quad \text{and} \quad \sigma_H^2 = \text{Var} [\tilde{Q}] \quad (118)$$

$$\mu_L = \mathbb{E} [\tilde{Q}_L] \quad \text{and} \quad \sigma_L^2 = \text{Var} [\tilde{Q}_L] \quad (119)$$

If  $N$ , i.e., the total number of samples used to evaluate  $\tilde{Q}$  and  $\tilde{Q}_L$  is large enough for the estimators to be practically useful, then the Central Limit Theorem also applies, and we can write

$$\tilde{Q} = \mu_H + Z_H \text{ where } Z_H \sim \mathcal{N}(0, \sigma_H^2) \quad (120)$$

$$\tilde{Q}_L = \mu_L + Z_L \text{ where } Z_L \sim \mathcal{N}(0, \sigma_L^2) \quad (121)$$

Therefore, substituting equations 120 and 121 into Eq. (27),  $\tilde{\alpha}$  becomes

$$\tilde{\alpha} = \frac{\mu_H + Z_H}{\mu_L + Z_L} = \frac{\mu_H \left(1 + \frac{Z_H}{\mu_H}\right)}{\mu_L \left(1 + \frac{Z_L}{\mu_L}\right)} \quad (122)$$

$$\Rightarrow \ln(\tilde{\alpha}) = \ln\left(\frac{\mu_H}{\mu_L}\right) + \ln\left(1 + \frac{Z_H}{\mu_H}\right) - \ln\left(1 + \frac{Z_L}{\mu_L}\right) \quad (123)$$

Notice also that since  $\tilde{Q}$  and  $\tilde{Q}_L$  are estimators,  $\sigma_H \rightarrow 0$  and  $\sigma_L \rightarrow 0$  as  $N \rightarrow \infty$ . (In fact, in most practical cases  $\sigma_H/\mu_H \leq 0.1$ , and analogously for  $\sigma_L$ .) Therefore, again for sufficiently large  $N$ ,

$$\frac{Z_H}{\mu_H} \ll 1 \text{ and } \frac{Z_L}{\mu_L} \ll 1 \quad (124)$$

We now make use of the following Taylor Series Expansion for small  $\delta$ ,

$$\ln(1 + \delta) = \delta - \frac{\delta^2}{2} + \frac{\delta^3}{3} - \frac{\delta^4}{4} \dots \quad (125)$$

which, in conjunction with equations 123 and 124, allows us to write

$$\ln(\tilde{\alpha}) \approx \ln\left(\frac{\mu_H}{\mu_L}\right) + R_{HL} \quad (126)$$

$$\text{where } R_{HL} = \frac{Z_H}{\mu_H} - \frac{Z_L}{\mu_L} \quad (127)$$

Since  $Z_H$  and  $Z_L$  are Gaussian random variables,  $R_{HL}$  is also a Gaussian random variable.

$$R_{HL} \sim \mathcal{N}\left(0, \frac{\sigma_H^2}{\mu_H^2} + \frac{\sigma_L^2}{\mu_L^2}\right) \quad (128)$$

This directly shows us that

$$\ln(\tilde{\alpha}) \sim \mathcal{N}\left(\ln\left(\frac{\mu_H}{\mu_L}\right), \frac{\sigma_H^2}{\mu_H^2} + \frac{\sigma_L^2}{\mu_L^2}\right) \quad (129)$$

## C Special Case: Nested Failure Regions

In the special case when the failure region predicted by the LF model contains the failure region predicted by the HF model, the proposed CVIS estimator collapses into the Multifidelity Importance Sampling method proposed by Peherstorfer et. al [28].

In this special case,  $I_L(\mathbf{x}) = I_H(\mathbf{x}) = 1 \forall \mathbf{x} \in \Omega_{\mathcal{F}}$ . Thus, the most efficient Importance Sampling Density of our selected form (Eq. (24)) occurs when  $\beta^* = \infty$ . Additionally, we know that for this value of  $\beta^*$ ,  $S_L(\mathbf{x}, \beta^*) = I_L(\mathbf{x})$ , and thus our proposed ISD converges to the ISD suggested in [28].

We can also recognize that in this case,  $\hat{Q}_L = \hat{C}_S$  (Eq. (26)) and  $\hat{Q} = \hat{\mathbb{E}}_q[I_H(\mathbf{X})]$  (Eq. (25)), where  $\hat{\mathbb{E}}_q[\cdot]$  is an estimator of  $\mathbb{E}_q[\cdot]$ . Further,  $\hat{C}_S = \hat{P}_{FL}$ . We now see from equations 22 and 21, that, for this special case

$$\tilde{\alpha} = \frac{\hat{\mathbb{E}}_q[I_H(\mathbf{X})]}{\hat{P}_{FL}} \quad (130)$$

$$\Rightarrow \tilde{P}_F = \hat{\mathbb{E}}_q[I_H(\mathbf{X})] \quad (131)$$

This also satisfies our intuition as there is no variance in the LF indicator function within the probability density used as the ISD by our framework in this special case. Therefore, there is no additional variance reduction possible by Control Variates as there is no correlation between the two models within the chosen probability distribution (and  $\alpha^* = 0$  as per Eq. (14)). Hence, all variance reduction is achieved by Importance Sampling, which is optimal under this framework.

## Acknowledgments

This research is supported through the INL Laboratory Directed Research and Development (LDRD) Program under DOE Idaho Operations Office Contract DE-AC07-05ID14517. This research made use of the resources of the High-Performance Computing Center at INL, which is supported by the Office of Nuclear Energy of the US DOE and the Nuclear Science User Facilities under Contract No. DE-AC07-05ID14517. Portions of this work were carried out at the Advanced Research Computing at Hopkins (ARCH) core facility (<https://www.arch.jhu.edu/>), which is supported by the National Science Foundation (NSF) Grant Number OAC1920103. The authors are grateful to Professor Dootika Vats for her suggestions on MCMC variance estimators.

## References

- [1] R. Y. Rubinstein and D. P. Kroese. *Simulation and the Monte Carlo Method*. Wiley, 2016.
- [2] George Lee Ang, Alfredo H.-S. Ang, and Wilson Hon-Chung Tang. Optimal importance-sampling density estimator. *Journal of Engineering Mechanics-ASCE*, 118:1146–1163, 1992.
- [3] S.K. Au and J.L. Beck. A new adaptive importance sampling scheme for reliability calculations. *Structural Safety*, 21(2):135–158, 1999.
- [4] Christian G. Bucher. Adaptive sampling — an iterative fast monte carlo procedure. *Structural Safety*, 5(2):119–126, 1988.
- [5] Armen Der Kiureghian and Taleen Dakessian. Multiple design points in first and second-order reliability. *Structural Safety*, 20(1):37–49, 1998.
- [6] R.E. Melchers. Importance sampling in structural systems. *Structural Safety*, 6(1):3–10, 1989.
- [7] S. K. Au and J. L. Beck. Estimation of small failure probabilities in high dimensions by subset simulation. *Probabilistic Engineering Mechanics*, 16(4):263–277, 2001.
- [8] Thomas A. Catanach and James L. Beck. Bayesian updating and uncertainty quantification using sequential tempered mcmc with the rank-one modified metropolis algorithm. *arXiv: Computation*, 4 2018.
- [9] Iason Papaioannou, Costas Papadimitriou, and Daniel Straub. Sequential importance sampling for structural reliability analysis. *Structural Safety*, 62:66–75, 2016.
- [10] Sinan Xiao, Sebastian Reuschen, Gözde Köse, Sergey Oladyshkin, and Wolfgang Nowak. Estimation of small failure probabilities based on thermodynamic integration and parallel tempering. *Mechanical Systems and Signal Processing*, 133:106248, 2019.
- [11] Jorge E Hurtado and Diego A Alvarez. Neural-network-based reliability analysis: a comparative study. *Computer Methods in Applied Mechanics and Engineering*, 191(1):113–132, 2001. *Micromechanics of Brittle Materials and Stochastic Analysis of Mechanical Systems*.
- [12] Manolis Papadrakakis, Vissarion Papadopoulos, and Nikos D. Lagaros. Structural reliability analysis of elastic-plastic structures using neural networks and monte carlo simulation. *Computer Methods in Applied Mechanics and Engineering*, 136(1):145–163, 1996.
- [13] V.S. Sundar and Michael D. Shields. Surrogate-enhanced stochastic search algorithms to identify implicitly defined functions for reliability analysis. *Structural Safety*, 62:1–11, 2016.
- [14] Seung Kyum Choi, Ramana V. Grandhi, and Robert A. Canfield. Structural reliability under non-gaussian stochastic behavior. *Computers and Structures*, 82:1113–1121, 5 2004.
- [15] R. Schöbi, B. Sudret, and S. Marelli. Rare event estimation using polynomial-chaos kriging. *ASCE-ASME Journal of Risk and Uncertainty in Engineering Systems, Part A: Civil Engineering*, 3(2):D4016002, 2017.
- [16] B. J. Bichon, M.S. Eldred, L.P. Swiler, S. Mahadevan, and J.M. McFarland. Efficient global reliability analysis for nonlinear implicit performance functions. *AIAA Journal*, 46:2459–2468, 10 2008.
- [17] B. Echard, N. Gayton, and M. Lemaire. AK-MCS: An active learning reliability method combining Kriging and Monte Carlo Simulation. *Structural Safety*, 33(2):145–154, 2011.
- [18] X. Huang, J. Chen, and H. Zhu. Assessing small failure probabilities by AK-SS: An active learning method combining Kriging and Subset Simulation. *Structural Safety*, 59:86–95, 2016.
- [19] N. Lelièvre, P. Beaurepaire, C. Mattrand, and N. Gayton. AK-MCSi: A Kriging-based method to deal with small failure probabilities and time-consuming models. *Structural Safety*, 73:1–11, 2018.

- [20] N. Razaaly and P.M. Congedo. Extension of AK-MCS for the efficient computation of very small failure probabilities. *Reliability Engineering & System Safety*, 203:107084, 2020.
- [21] VS Sundar and Michael D Shields. Reliability analysis using adaptive kriging surrogates with multimodel inference. *ASCE-ASME Journal of Risk and Uncertainty in Engineering Systems, Part A: Civil Engineering*, 5(2):04019004, 2019.
- [22] X. Zhang, M. Xiao, and L. Gao. An active learning reliability method combining Kriging constructed with exploration and exploitation of failure region and subset simulation. *Reliability Engineering & System Safety*, 188:90–102, 2019.
- [23] Benjamin Peherstorfer, Karen Willcox, and Max Gunzburger. Survey of multifidelity methods in uncertainty propagation, inference, and optimization. *SIAM Review*, 60:550–591, 2018.
- [24] Promit Chakroborty, Somayajulu L. N. Dhulipala, Yifeng Che, Wen Jiang, Benjamin W. Spencer, Jason D. Hales, and Michael D. Shields. General multifidelity surrogate models: Framework and active-learning strategies for efficient rare event simulation. *Journal of Engineering Mechanics*, 149(12):04023096, 2023.
- [25] Somayajulu L.N. Dhulipala, Michael D. Shields, Benjamin W. Spencer, Chandrakanth Boliseti, Andrew E. Slaughter, Vincent M. Labouré, and Promit Chakroborty. Active learning with multifidelity modeling for efficient rare event simulation. *Journal of Computational Physics*, 468, 11 2022.
- [26] Chi Zhang, Chaolin Song, and Abdollah Shafieezadeh. Adaptive reliability analysis for multi-fidelity models using a collective learning strategy. *Structural Safety*, 94, 1 2022.
- [27] J. Andrés Christen and Colin Fox. Markov chain monte carlo using an approximation. *Journal of Computational and Graphical Statistics*, 14(4):795–810, 2005.
- [28] Benjamin Peherstorfer, Tiangang Cui, Youssef Marzouk, and Karen Willcox. Multifidelity importance sampling. *Computer Methods in Applied Mechanics and Engineering*, 300:490–509, 2016.
- [29] M.B. Giles, M. B. Majka, L. Szpruch, S. J. Vollmer, and K. C. Zygalakis. Multi-level monte carlo methods for the approximation of invariant measures of stochastic differential equations. *Statistics and Computing*, 30:507–524, 2020.
- [30] Michael B. Giles. Multilevel monte carlo methods. *Acta Numerica*, 24:259–328, 2015.
- [31] A. L. Haji-Ali, F. Nobile, and R. Tempone. Multi-index monte carlo: when sparsity meets sampling. *Numerische Mathematik*, 132:767–806, 2016.
- [32] Gianluca Geraci, Michael S. Eldred, and Iaccarino Gianluca. A multifidelity multilevel monte carlo method for uncertainty propagation in aerospace applications. 2 2017.
- [33] Alex A. Gorodetsky, Gianluca Geraci, Michael S. Eldred, and John D. Jakeman. A generalized approximate control variate framework for multifidelity uncertainty quantification. *Journal of Computational Physics*, 408, 5 2020.
- [34] Moien Barkhori Mehni and Mohammad Barkhori Mehni. Reliability analysis with cross-entropy based adaptive markov chain importance sampling and control variates. *Reliability Engineering & System Safety*, 231:109014, 2023.
- [35] Trung Pham and Alex A. Gorodetsky. Ensemble approximate control variate estimators: Applications to multifidelity importance sampling. *SIAM/ASA Journal on Uncertainty Quantification*, 10(3):1250–1292, 2022.
- [36] Mohsen Rashki. Hybrid control variates-based simulation method for structural reliability analysis of some problems with low failure probability. *Applied Mathematical Modelling*, 60:220–234, 2018.
- [37] Art B. Owen. *Monte Carlo theory, methods and examples*. <https://artowen.su.domains/mc/>, 2013.
- [38] Armin Tabandeh, Gaofeng Jia, and Paolo Gardoni. A review and assessment of importance sampling methods for reliability analysis. *Structural Safety*, 97, 7 2022.
- [39] Cajo J.F. Ter Braak. A markov chain monte carlo version of the genetic algorithm differential evolution: Easy bayesian computing for real parameter spaces. *Statistics and Computing*, 16:239–249, 9 2006.
- [40] Cajo J.F. Ter Braak and Jasper A. Vrugt. Differential evolution markov chain with snooker updater and fewer chains. *Statistics and Computing*, 18:435–446, 12 2008.
- [41] Nilay Tanik Argon and Sigrún Andradóttir. Replicated batch means for steady-state simulations. *Naval Research Logistics (NRL)*, 53(6):508–524, 2006.
- [42] Kushagra Gupta and Dootika Vats. Estimating monte carlo variance from multiple markov chains, 2020.
- [43] A.K. Chopra. *Dynamics of Structures: Theory and Applications to Earthquake Engineering*. Pearson, 2017.

- [44] John W. Peterson, Alexander D. Lindsay, and Fande Kong. Overview of the incompressible navier–stokes simulation capabilities in the moose framework. *Advances in Engineering Software*, 119:68–92, 2018.
- [45] Cody J. Permann, Derek R. Gaston, David Andrš, Robert W. Carlsen, Fande Kong, Alexander D. Lindsay, Jason M. Miller, John W. Peterson, Andrew E. Slaughter, Roy H. Stogner, and Richard C. Martineau. Moose: Enabling massively parallel multiphysics simulation. *SoftwareX*, 11:100430, 2020.
- [46] Alexander D. Lindsay, Derek R. Gaston, Cody J. Permann, Jason M. Miller, David Andrš, Andrew E. Slaughter, Fande Kong, Joshua Hansel, Robert W. Carlsen, Casey Icenhour, Logan Harbour, Guillaume L. Giudicelli, Roy H. Stogner, Peter German, Jacob Badger, Sudipta Biswas, Leora Chapuis, Christopher Green, Jason Hales, Tianchen Hu, Wen Jiang, Yeon Sang Jung, Christopher Matthews, Yinbin Miao, April Novak, John W. Peterson, Zachary M. Prince, Andrea Rovinelli, Sebastian Schunert, Daniel Schwen, Benjamin W. Spencer, Swetha Veeraraghavan, Antonio Recuero, Dewen Yushu, Yaqi Wang, Andy Wilkins, and Christopher Wong. 2.0 - moose: Enabling massively parallel multiphysics simulation. *SoftwareX*, 20:101202, 2022.
- [47] Charles J. Geyer. Introduction to markov chain monte carlo. In Steve Brooks, Andrew Gelman, Galin Jones, and Xiao-Li Meng, editors, *Handbook of Markov Chain Monte Carlo*. Chapman & Hall/CRC, 2011.
- [48] Charles J. Geyer. Practical markov chain monte carlo. *Statistical Science*, 7(4):473–483, 1992.
- [49] M.B. Priestley. *Spectral Analysis and Time Series*. Academic Press, London., 1981.
- [50] Medha Agarwal and Dootika Vats. Globally centered autocovariances in mcmc. *Journal of Computational and Graphical Statistics*, 31(3):629–638, 2022.
- [51] James M. Flegal and Galin L. Jones. Batch means and spectral variance estimators in Markov chain Monte Carlo. *The Annals of Statistics*, 38(2):1034 – 1070, 2010.
- [52] Y. Liu, D. Vats, and J. M. Flegal. Batch Size Selection for Variance Estimators in MCMC. *Methodology and Computing in Applied Probability*, 24:735–750, 1 2021.
- [53] D. Vats and J. M. Flegal. Lugsail lag windows for estimating time-average covariance matrices. *Biometrika*, 109(3):735–750, 10 2021.
- [54] D. Katz, J. Baptista, S. P. Azen, and M. C. Pike. Obtaining confidence intervals for the risk ratio in cohort studies. *Biometrics*, 34(3):469–474, 1978.