NeuroIDBench: An Open-Source Benchmark Framework for the Standardization of Methodology in Brainwave-based Authentication Research

Avinash Kumar Chaurasia^a, Matin Fallahi^b, Thorsten Strufe^b, Philipp Terhörst^a, Patricia Arias Cabarcos^{a,b}

^aUniversity of Paderborn, Paderborn, Germany ^bKASTEL Security Research Labs - KIT, Karlsruhe, Germany

Abstract

Biometric systems based on brain activity have been proposed as an alternative to passwords or to complement current authentication techniques. By leveraging the unique brainwave patterns of individuals, these systems offer the possibility of creating authentication solutions that are resistant to theft, hands-free, accessible, and potentially even revocable. However, despite the growing stream of research in this area, faster advance is hindered by reproducibility problems. Issues such as the lack of standard reporting schemes for performance results and system configuration, or the absence of common evaluation benchmarks, make comparability and proper assessment of different biometric solutions challenging. Further, barriers are erected to future work when, as so often, source code is not published open access. To bridge this gap, we introduce NeuroIDBench, a flexible open source tool to benchmark brainwave-based authentication models. It incorporates nine diverse datasets, implements a comprehensive set of pre-processing parameters and machine learning algorithms, enables testing under two common adversary models (known vs unknown attacker), and allows researchers to generate full performance reports and visualizations. We use NeuroIDBench to investigate the shallow classifiers and deep learning-based approaches proposed in the literature, and to test robustness across multiple sessions. We observe a 37.6% reduction in Equal Error Rate (EER) for unknown attacker scenarios (typically not tested in the literature), and we highlight the importance of session variability to brainwave authentication. All in all, our results demonstrate the viability and relevance of NeuroIDBench in streamlining fair comparisons of algorithms, thereby furthering the advancement of brainwave-based authentication through robust methodological practices.

Keywords: biometrics authentication, recognition, EEG authentication, brainwave authentication

1. Introduction

In today's rapidly changing security landscape, the authentication process is a crucial element of access control [1]. The increasing impracticality and safety concerns associated with conventional authentication methods, such as passwords [2, 3], are driving the development of novel biometric solutions. In this domain, user recognition based on brain activity has gained increasing attention [4], especially with advancements in consumer-grade EEG (Electroencephalogram) technology [5, 6, 7, 8]. A notable application scenario is Extended Reality (XR), where seamless and secure biometric authentication systems are urgently needed [9]. Besides, brain biometrics bring broader benefits, such as enabling hands-free authentication, resistance to observation, inherent liveness detection, broad universality, and potential for revocability [4, 10, 11].

Unfortunately, the research in brainwave-based authentication is beset by problems of generalizability, comparability, and reproducibility. To begin, dataset sharing is sharply curtailed by ethical considerations and privacy laws. Therefore, many studies are based on self-collected undisclosed datasets, which often leads to results that are potentially overfitted or optimized to the specific characteristics of those datasets, with uncertain applicability to other, independent datasets. Also, the size of the datasets used in studies is severely limited by the complex-

ity and resource intensiveness of broad data collection. In fact, most brainwave-based authentication studies have much fewer than 50 subjects [4, 12], so that the evaluations are normally conducted on very small datasets. Consequently, the models and hyperparameters are prone to overfitting, which means the reported results will likely fail to generalize. To make matters worse, too many authors either neglect making available their source code or provide code which is inoperable, with the consequence that researchers are prevented from reproducing and building upon previous work. Clearly, under circumstances such as these, our subcommunity of authentication researchers will not make any significant progress. That is why the time has come for us to consolidate our practice and advance the research toward consistent, reproducible, and generalizable findings. To address this gap, we make the following contributions:

(1) We present NeuroIDBench, the first comprehensive open-source¹ benchmark tool designed to assist researchers in evaluating their brainwave-based authentication approaches. NeuroIDBench is engineered to allow for the easy and flexible integration of new datasets and methods, enabling fair comparability. NeuroIDBench incorporates nine public datasets, which together contain

¹https://github.com/Avichaurasia/NeuroIDBench.git

a substantial number of subjects (n = 285, Table 2) and multi-session recordings. To determine the impact of pre-processing on performance, NeuroIDBench allows to apply different sample rejection thresholds as well as sample length parameters (Sec 4.1) and feature extraction methods (Sec 4.2). Also, it implements a baseline with the most popular authentication algorithms in the state of the art, including shallow classifiers and deep learning-based approaches. Lastly, it incorporates two attack scenarios under which to test the algorithms [13]: i) known attacker, where the attacker is known to the authentication model (i.e., enrolled in the system), and, ii) unknown attacker, a more realistic situation in which the attacker biometric data has not been seen by the system previous to the attack

(2) We use NeuroIDBench to build a comprehensive benchmark of popular brainwave-based authentication algorithms, providing the first unbiased comparison of approaches. Namely, we compare six shallow classifiers: SVM (Support Vector Machine), Random Forest, KNN (K-Nearest Neighbors), LDA (Linear Discriminant Analysis), Naive Bayes (NB), and Logistic Regression (LR). Besides this benchmark, which covers the biggest share of solutions in the literature, we provide a second benchmark for the recent stream of work on deep learningbased approaches. Specifically, NeuroIDBench implements the representative similarity-based technique using Twin Neural Networks (Sec. 4.5). Beyond performance across an extensive list of publicly available EEG datasets, we focus our comparative analysis on two under-explored aspects in current research: How robust are different solutions in multi-session scenarios? (Sec. 4.4) and What is the impact of the adversary model? (Sec. 4.3)

Among the key findings in the analysis we observe that Random Forest consistently outperforms other classifiers and its performance is comparable to that of Twin Neural Networks. As the latter brings not only better performance but scalability advantages, we recommend more research on deep learningbased approaches to move forward, which is also the path followed in other biometric communities [14, 15, 16]. Furthermore, our results confirm that integrating Power Spectral Density (PSD) with an Autoregressive (AR) model of order 1 stands out as the most effective feature extraction approach. When investigating the impact of the adversary model, our results indicate that the average Equal Error Rate (EER) for known attackers is 2.87%, while for unknown attackers, it is 4.6%. This trend in performance degradation underscores the need to evaluate brainwave authentication solutions under unknown attacker scenarios to provide a realistic performance indicator, a practice that is uncommon in current work. Variations in the performance across datasets confirm that brainwave-based authentication algorithms validated on single datasets are not representative, highlighting the need for more robust validation in the community. Finally, the observed disparities in the results for single-session versus multi-session authentication reveal a substantial gap that requires future research in this area.




Figure 1: Overview of elements in a brainwave-based biometric authentication process [23].

2. Background and Related Work

This section lays out the main terminology and background information on brainwave-based biometrics and reviews related work in the area, discussing reproducibility.

2.1. Using brainwaves for Biometric Authentication

Brainwaves, or EEG signals, represent the electrical activity produced by neuron interactions in the brain [17, 18]. These signals are commonly recorded from the scalp using specialized sensors. Originally developed for medical purposes [19], such as diagnosing neurological disorders [20], EEG technology has expanded its applications significantly. Its usage now extends to Brain-Computer Interfaces (BCI), facilitating direct interaction between the human brain and external devices [21], and enjoys acceptance in the consumer market, especially for gaming and health-related applications.

Identity verification, commonly known as **authentication**, involves a one-to-one comparison to confirm if an individual presenting a previously registered biometric trait is indeed the same person. In essence, it addresses the question: "Are you who you claim to be?" This process is crucial to differentiate legitimate users from imposters. Biometric authentication comprises two primary phases: enrollment and verification [22]. During enrollment, users' unique biometric characteristics are captured and stored as templates or used to train and store a classification model for that user. Each template/user model is linked to a unique user identifier, such as a username. In the verification phase, the system compares the current biometric sample with the stored template or runs it through the classification model, corresponding to the claimed identity.

The **brainwave-based authentication process**, depicted in Figure 1, unfolds through several key stages:

• Raw EEG Data Acquisition: This initial step captures the brain's electrical activity. An effective way to elicit signals useful for authentication is measuring brain reactions to controlled stimuli, such as audio or images. These timelocked reactions, called Event-Related Potentials (ERPs), have shown unique features to individuate people [24] and are distinguished by their high Signal-to-Noise Ratio (SNR) [25, 10]. Moreover, the ability to modify the stimuli associated with ERPs enhances the system's revocability. This feature is invaluable in mitigating risks associated

with potential data compromise [11]. NeuroIDBench focuses in ERP-based datasets, given their superior benefits with regard to alternative brainwave elicitation paradigms.

- Signal Pre-processing: The acquired raw EEG data is then refined through pre-processing. This may include filtering out noise, rejecting artifacts, and downsampling the signal, aiming to isolate the purest form of the EEG data for authentication purposes [4]. NeuroIDBench embeds a pre-processing pipeline based on best-practices for handling ERPs as used in the community [4].
- Feature Extraction: The pre-processed EEG signals are further analyzed to extract key features. These features can be directly obtained from the ERP EEG signal, such as power spectral densities, or generated as representation vectors learned by a neural network. NeuroIDBench implements both kind of approaches.
- User Model/Template Database: This Database stores
 the user model learned from the collected features in order to perform classification, or the template of features
 representing the user.
- Decision Maker: In the authentication phase, the system evaluates the incoming EEG sample, against the stored model/template, applying similarity thresholds to decide if it belongs to a legitimate user or to an impostor. NeuroIDBench incorporates the most common techniques for machine learning model-based approaches (SVM, KNN, LDA, NB, LR, RF), as well as the main approach for template-based authentication using deep neural networks (Twin Neural Networks).

2.2. Adversary Model

In addressing the security of brainwave-based authentication systems, we consider the zero-effort attacker as the primary threat model. This approach aligns with the standard threat model used in most brainwave authentication studies. A zero-effort attack is characterized by an adversary who attempts to gain unauthorized access using their own biometric data, without employing any advanced techniques to mimic or falsify another individual's biometric trait [13]. In this context, the key challenge in protecting against zero-effort attacks lies in the biometric system's ability to accurately distinguish between the biometric data of an actual user and that of the intruder. The system must be adept at minimizing false matches, where the adversary's biometric data is erroneously accepted as that of a legitimate user.

In our consideration of zero-effort attacks, we distinguish between two types of attackers: *known* and *unknown*. A known attacker refers to one whose biometric data has previously been exposed to the system, typically during the training phase. This exposure can influence the system's learning and adaptation, potentially affecting its ability to accurately identify or reject these attackers later. On the other hand, an unknown attacker is one whose biometric data has never been introduced to the system. This lack of prior exposure means that the system has

no learning or adaptation based on this attacker's data, making it a more realistic and challenging scenario. We expect that unknown attackers represent a higher risk to the system, as they test the system's ability to authenticate users based purely on learned patterns without prior knowledge of specific individuals. Our focus on defending against unknown attackers is driven by the need to develop robust authentication systems that can reliably identify and prevent unauthorized access by individuals completely unknown to the system.

2.3. Related Work

Table 1: Comparison of Related Work on Brainwave-Based Authentication, detailing Dataset Identity Population (D.P.), Dataset Availability (D.A.), and Code Availability (C.A). (For papers that had more than one independent dataset. Population of them split with comma (",")

Publication	D.P.	D.A.	C.A.
Arias et al.(2023) [23]	52,40	✓	×
Fallahi et al.(2023) [27]	41,40	\checkmark	\checkmark
Hernandez et al.(2022) [28]	39	×	×
Bidgoly et al.(2022) [29]	109	\checkmark	×
Maiorana(2021) [30]	45	×	×
Sooriyaarachchi et al.(2020) [31]	20	×	×
Gupta et al.(2020) [32]	20	\checkmark	\checkmark
Nakanishi et al.(2019) [33]	10	×	×
Lin et al.(2018) [11]	179	×	×
Schons et al.(2018) [34]	109	\checkmark	×
Das et al.(2016) [35]	50	×	×

Presently, two primary methods for brainwave authentication are studied in the literature. The first method utilizes shallow classifiers built on time series-based feature extraction techniques, such as Power Spectral Density (PSD) or Autoregressive (AR) models [23, 24, 33, 35]. The second approach involves training specialized deep learning models designed explicitly for brainwave data, aiming to extract features directly associated with user identity [27, 30, 34, 29]. However, traditional feature extraction methods are not sufficiently effective, as they were not originally designed for authentication purposes. Meanwhile, deep learning approaches require a substantial amount of data to develop an adequate feature extractor, which is currently scarce in the field of brainwave authentication. Therefore, it is crucial to determine the most appropriate hyperparameters based on other datasets in the field, which can aid in mitigating these challenges.

Table 1 presents an analysis of 11 papers in the realm of brainwave authentication. Among these, only two papers have made their source code available [27, 32], and merely five have utilized public datasets [27, 32, 23, 29, 34]. Notably, four of these papers employed two common public datasets [36, 37], reflecting the limited data availability, which consequently diminishes the generalizability of the results. On average, these studies included approximately 70 subjects for their evaluation purposes. The subcommunity in brainwave-based authentication clearly require more transparency in the research practice as well as more accessibility in the datasets and source code. To

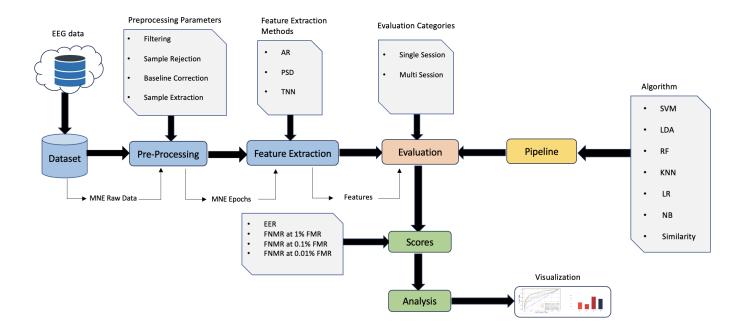


Figure 2: Schematic depiction outlining the architectural structure of the NeuroIDBench codebase, providing a visual overview of its underlying framework [26]

be sure, the brainwave-authentication subcommunity are, in this regard, not alone. For example, Olszewski et al. [38] find that the "large and long-lived" subcommunity of machine learning security fail to provide data (30%) or source code (40%) even in the papers published at the top-tier security conferences. The authors found out that a full 80% of artifacts are incapable of reproducing the reported results. It is therefore unsurprising that similar problems should plague the new and emerging subcommunity in brainwave-based authentication. Nevertheless, these issues are intensified in brainwave authentication due to the relatively small size of each dataset, heightening the risk of overfitting.

Meanwhile, researchers in the field of Brain-Computer Interface (BCI) encounter similar challenges. Hence, Jayaram and Barachant [39] proposed a benchmark framework² for investigating common BCI algorithms across 22 public EEG datasets with over 250 participants. This framework aims to address issues of reproducibility, lack of open-source resources, and result compatibility. However, their study did not cover authentication algorithms. Therefore, it is vital for brainwave authentication research to adopt an open-source approach and to extensively employ existing public datasets. It is crucial to take such steps to enhance the robustness of research in this field and to promote a deeper, more comprehensive exploration of brainwave authentication techniques.

3. NeuroIDBench

As illustrated in Figure 2, NeuroIDBench is organized into five integral components: dataset, preprocessing, feature ex-

²https://github.com/NeuroTechX/moabb

traction, evaluation, and analysis. Our benchmarking workflow is influenced by MOABB (Mother of all BCI benchmarks) [26] work. In line with our research aims, we have tailored and refined their methodology to create a customized benchmarking suite specifically designed for evaluating and analyzing brainwave authentication systems. In the following, we detail NeuroIDBench's components, justifying the design choices.

3.1. Dataset Loading

In response to the need for flexible dataset management in EEG research, we have developed an interface aimed at streamlining the handling of diverse datasets with various formats, thereby reducing the burden on researchers. In the past, this field has been constrained by the laborious task of manually importing and formatting each dataset individually, often limiting researchers to using only one or two datasets in their analyses due to these logistical challenges. To overcome this, our solution is a straightforward Python component that automatically downloads and processes nine distinct EEG datasets using the MNE Python package³, a recognized and open-source brainwave library. This tool not only simplifies the integration of these existing datasets but also allows for the easy adoption of new datasets into the benchmark by following established examples and specifying the relevant event IDs. The expected outcome of this innovation is a significant enhancement in the use of diverse datasets in research, promoting the avoidance of overfitting to specific datasets and fostering more generalizable and robust scientific findings. This development represents a leap forward in EEG-based research, offering researchers a

³https://mne.tools/stable/index.html

Table 2: Publicly available ERP datasets based on N400 (Semantic Priming) paradigm and P300 (oddball) paradigm

Paradigm	Dataset	Year	Subjects	EEG Device	Channels	S.Rate	Sessions
N400	Pijnacker et al. [40]	2017	45	actiCap	32	500 Hz	1
N400	Draschkow et al. [41]	2018	40	BrainAmp, actiChamp	64	1000 Hz	1
N400	Marzecová et al. [42]	2018	18	BrainAmp	59	500 Hz	1
N400	Mantegna et al. [43]	2019	31	BrainAmp, EasyCap	65	500 Hz	1
N400	ERPCORE: N400 [36]	2021	40	Biosemi	30	1024 Hz	1
N400	Hodapp and Rabovky [44]	2021	33	BrainAmp	64	1000 Hz	1
N400	Rabs <i>et al</i> . [45]	2022	38	BrainVision	26	500 Hz	1
N400	Schoknecht et al. [46]	2022	38	ActiCap, ActiChamp	58	500 Hz	1
N400	Toffolo et al. [47]	2022	24	Biosemi	128	512 Hz	1
N400	Lindborg et al. [48]	2022	40	BrainVision	64	2046 Hz	1
N400	COGBCI: Flanker [49]	2023	29	ActiCap, actiChamp	64	512 Hz	3
N400	Stone <i>et al.</i> [50]	2023	64	TMSi Refa	32	512 Hz	1
P300	BrainInvaders12 [51]	2012	25	NeXus-32	16	128 Hz	1
P300	BrainInvaders13a [52]	2013	24	g.GAMMAcap	16	512 Hz	1
P300	BrainInvaders14a [53]	2014	64	g.Sahara	16	512 Hz	1
P300	BrainInvaders14b [54]	2014	37	g.GAMMAcap	32	512 Hz	1
P300	Gao et al. [55]	2014	30	Neuroscan	12	500 Hz	1
P300	BrainInvaders15a [56]	2015	50	g.GAMMAcap	32	512 Hz	1
P300	BrainInvaders15b [57]	2015	44	g.GAMMAcap	32	512 Hz	1
P300	Mouček et al. [58]	2017	250	BrainVision	3	n.a.	1
P300	Hubner <i>et al</i> . [59]	2017	13	BrainAmp DC	31	1000 Hz	1
P300	Sosulski and Tangermann [60]	2019	13	BrainAmp, EasyCap	31	1000 Hz	1
P300	Lee et al. [61]	2019	54	BrainAmp	62	1000 Hz	2
P300	Simões et al. [62]	2020	15	g.tec	8	250 Hz	7
P300	Goncharenko et al. [63]	2020	60	NVX-52	8	500 Hz	1
P300	Chatroudi et al. [64]	2021	24	g.tec	64	1200 Hz	1
P300	Cattan <i>et al</i> . [65]	2021	21	g.USBamp, g.tec	16	512 Hz	1
P300	ERPCORE: P300 [36]	2021	40	Biosemi	30	1024 Hz	1
P300	Won <i>et al</i> . [66]	2022	55	Biosemi	32	512 Hz	1

more efficient and comprehensive approach to dataset management and analysis.

In choosing our dataset, we focused on Event-Related Potential (ERP) paradigms, particularly the P300 and N400, which are the most well-known and easier to elicit. The P300 reaction is triggered with the 'oddball' paradigm, i.e., including a rare stimulus in a sequence [67], while the N400 is linked to semantic processing [68]. Our selection methodology involved a thorough review of publicly accessible datasets utilizing these ERP paradigms. We carefully examined and assessed over 29 datasets (see Table 2). Ultimately, we chose 9 datasets for further investigation. This selection included two multi-session datasets to examine performance over multiple sessions [49, 61], five datasets with over 30 subjects to evaluate performance in datasets with a relatively large number of samples [43, 36, 56, 66], and two datasets with just 13 subjects to explore performance in smaller datasets [59, 60].

Our prioritization focused on datasets providing raw (unprocessed) data with ample event information, facilitating the extraction of relevant P300 or N400 samples. This emphasis led to the implementation of a condition favoring datasets with raw data, allowing us to uniformly apply standardized preprocessing, feature extraction, and authentication steps across

all selected datasets. This uniform procedure is crucial for evaluating their performance under comparable experimental conditions, an unattainable task without access to unprocessed raw data. Consequently, datasets offering solely pre-processed data were excluded from our study. Additionally, the necessity for comprehensive event information was paramount; without it, the assurance of working with the correct events, intricately associated with the elicitation of P300 and N400, would have been compromised.

3.2. Pre-processing

In this module, we conduct pre-processing on the standardized MNE Raw data. Various methods exist for cleansing artifacts; however, the procedures must remain consistent to ensure the validity of comparisons between algorithms or datasets [26]. We adhere to established best practices commonly employed in pre-processing methodologies within brainwave authentication studies [4]. To cleanse EEG artifacts, we begin by implementing bandpass filtering in the range of 1 to 50 Hz. Subsequently, we extract samples from the raw signals, temporally aligning the data to a range spanning from -200 to 800 ms relative to the onset of the stimulus. Afterward, Following the baseline correction, where we subtract the mean of a baseline period (-200

to 0 ms) from the entire sample data points to mitigate drift effects like DC offsets [27]. Finally, we employ a peak-to-peak rejection method to eliminate large artifacts attributed to eye or muscle movements from contaminating the EEG data.

While adhering to established pre-processing standards prevalent in brainwave authentication studies, we recognize the necessity for researchers to tailor pre-processing approaches to suit their specific EEG data requirements. To address this need for flexibility, we designed this pre-processing interface with customization options. These functionalities empower researchers to adjust parameters, including the selection of sample interval, threshold settings for sample rejection, and the application of baseline correction, making it a more adaptable tool.

3.3. Feature Extraction

This module is designed to extract features from preprocessed EEG data. It specifically focuses on identifying characteristics in both the temporal and frequency domains. More precisely, it uses Autoregressive (AR) coefficients to represent time-domain properties and calculates Power Spectral Density (PSD) to capture frequency domain features. These calculated features, namely AR coefficients and PSD, are subsequently harnessed as inputs for facilitating authentication through shallow classifiers. In contrast, for similarity-based authentication, the module employs the Twin Neural Network (TNN) to generate feature embeddings. These embeddings, produced by the TNN, play a pivotal role as inputs for similarity-based authentication approaches.

To compute AR coefficients, our system fits AR models to the pre-processed samples, employing a one-second duration of time series data [23]. The estimation of these AR coefficients utilized the Yule-Walker method [69]. Determining the ideal order for AR modeling poses a challenge, as higher orders escalate computational demands, while exceedingly low orders inadequately represent the signal [70]. To address this, our system allows users the flexibility to define their preferred AR order, enabling a tailored approach aligned with their specific requirements.

The PSD of each sample is computed across different frequency bands, namely low (1-10 Hz), α (10-13 Hz), β (13-30 Hz), and γ (30-50 Hz), utilizing the Welchs periodogram algorithm [23]. The calculation involved first determining the PSD for each frequency point in the 1-second sample. For our PSD computation, we used four time windows that were all the same size. These windows were applied to a 1-second ERP sample, with a 50% overlap between each window. The inclusion of the time window factor was crucial to segregate the authentic frequency modulation of the EEG induced by attention from any artifacts that the attentional modulation of ERPs might have induced [71]. Subsequently, we computed the average PSD within the specified frequency ranges, enabling us to determine the average power spectrum of the low, α , β , and γ frequency bands.

Furthermore, NeuroIDBench implements a deep learning based approach using a TNN with triplet loss function to transform time-series EEG data into compact brain embeddings.

Building on the work of Fallahi *et al.* [27], our TNN structure integrates three Convolutional Neural Network (CNN) branches, each featuring five convolutional layers, as illustrated in Figure 3. These branches received 1-second samples as input, structured in a two-dimensional array where rows correspond to channel indices, and columns represent discrete-time measurements. After each convolutional layer, we applied an average pooling layer to reduce the input vectors' dimensionality while preserving the unique characteristics of each brainwave.

However, acknowledging the diverse nature of EEG datasets and the variability in research requirements, we have extended the flexibility of our framework; To accommodate varying preferences and dataset characteristics, users can conveniently adjust critical training parameters such as batch size, the number of epochs for training, and the learning rate within the tool. Also, the framework allows users to integrate their neural network architectures. This flexibility accommodates diverse methodologies for brainwave authentication studies, empowering researchers to assess and compare various deep-learning approaches across a wide range of EEG datasets within our tool.

3.4. Evaluation

Within this module, we actively utilize both learning methods for authentication, namely supervised learning employing shallow classifiers and similarity-based learning through Twin Neural Networks. Furthermore, we engage in classification under two distinct evaluation strategies: single-session and multisession evaluation:

Single-Session Evaluation: Under the single-session evaluation, the training and testing of the features are done utilizing the recorded data from a single session. To avoid overfitting and increase the reliability of our authentication system, crossvalidation schemes have been employed in both known and unknown attacker scenarios.

For the known attacker scenario, we implemented a Stratified cross-validation approach with k=4 to divide the singlesession data into training and testing sets. This choice ensures the representation of features from both classes in both training and testing data across each fold. We take the step of eliminating users with fewer than four samples from the datasets to guarantee sufficient samples for both training and testing [23]. Conversely, the unknown attacker approach adopts the Group-KFold cross-validation strategy with k=4, where grouping is based on SubjectID, resulting in non-overlapping training and testing sets for users in each cross-validation round. Evaluation metric results are aggregated across all folds, providing averaged and comprehensive reports. In datasets like COGBCI and Lee2019, which had multiple sessions, we evaluate each session separately, subsequently averaging the results from all the sessions as single-session evaluation results. Multi-session evaluation, described later in this section.

Additionally, we actively apply z-scaler normalization to both training and testing data to address potential issues arising from variations in feature scales, ensuring equitable contribution from all features during model training [72]. This approach aligns with established best practices in machine learning [73],




Figure 3: The CNN's network architecture within the Twin neural Network is designed to produce a condensed 32-bit embedding from brain data samples, serving as an efficient method to compute latent representations of inputs [27].

reinforcing the reliability and generalization capability of our EEG-based authentication system.

Multi-Session Evaluation: The multi-session evaluation methodology was applied to two EEG datasets, namely COG-BCI [49] and Lee2019 [61], each consisting of three and two sessions, respectively. To address potential overfitting, a cross-validation strategy was employed. This involved dividing the attacker subjects for the shallow classifiers and dividing the subject of latent space learning and evaluation.

In this setup, if we denote the EEG samples from the ith session as X_i , enrollment is being conducted using X_i , and authentication is performed using X_j , where j > i. For instance, if a dataset had three sessions (i.e., i = 1, 2, 3), authentication is performed using X_2 and X_3 after enrolling with X_1 and similarly using X_3 as authentication samples after enrolling with X_2 . This approach ensures that the model is trained on earlier sessions' data and tested on subsequent sessions, mimicking the real-world scenario where user enrollment precedes authentication. Notably, this logical sequence aligns with common practices in practical biometric systems. The reported results are the average of the results from all the testing sessions.

Similar to the single-session evaluation approach, we implemented data normalization on both training and testing datasets. Specifically, we applied 'fit and transform' to the training data, while only 'transform' was used for the testing data. Evaluation metrics were computed for each cross-validation fold and then averaged across sessions for reporting.

3.5. Analysis

This module provides methodologies for conducting statistical analyses on the performance of various datasets and algorithms [26]. Following the evaluation process, the performance of authentication methods across each cross-validation fold is systematically analyzed by computing essential evaluation metrics, EER serves as a summary metric, indicating the point where the False Match Rate (FMR) and the False Non-Match Rate (FNMR) are equal. Additionally, we report FNMR at specific FMR thresholds of 1%, 0.1%, and 0.01%, allowing for a granular examination of the model's performance under different operating conditions and security requirements. The FMR represents the likelihood of an unauthorized user being mistakenly authenticated by the system, reflecting the system's

vulnerability to a zero-effort attack. The objective is to achieve a low FMR while maintaining a reasonable FNMR. A high FNMR can result in legitimate users being repeatedly denied access, negatively impacting the device's usability. Hence, it is crucial to strike an optimal balance between FMR and FNMR to ensure robust security without undermining user experience.

By adopting this approach, we align our evaluation strategy with the foundational principles outlined in Jain *et al.* [74] and Ross *et al.* [75]. This analytical rigor ensures that the performance evaluation is not only robust but also reflective of the diverse operational scenarios encountered in real-world applications.

Furthermore, this benchmarking framework is developed with a primary focus on ensuring ease of use. Our goal is to enable users to efficiently utilize the framework, even without a thorough grasp of the complex technical aspects of the Python programming language. To accomplish this, we have created a user-friendly benchmarking script that proficiently examines a configuration file written in a straightforward YAML interface. This configuration file serves as a control panel, enabling users to specify a wide range of parameters and settings. This system effortlessly automates the complex processes of data extraction, pre-processing, feature extraction, and classification, as illustrated in Figure 2. This streamlined approach eliminates the need for users to delve into intricate programming complexities. In Appendix B, the procedural steps for tool installation are detailed, accompanied by illustrative examples of configuration files for the automated creation of brainwave authentication pipelines.

4. Benchmarking Results and Discussion

We began with preprocessing and feature extraction to identify the best parameters for subsequent experiments. Subsequently, we compared known and unknown attacker models to ascertain the increased difficulty associated with unknown problems. This was followed by an investigation into single and multi-session performances with unknown attacker scenarios. Additionally, we examined the effectiveness of two primary approaches: shallow classifiers and similarity approaches.

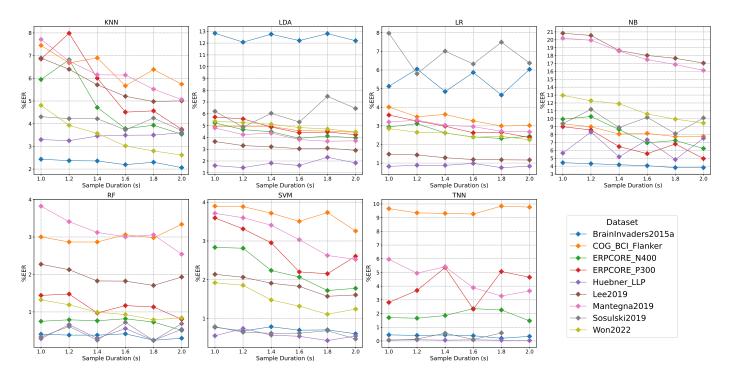


Figure 4: Impact of varying sample duration, ranging from 1 to 2 seconds, on the efficacy of the seven authentication algorithms. These algorithms are applied across nine datasets, with the evaluation metric employed being the EER. The evaluation was conducted under the unknown attacker scenario.

4.1. Preprocessing

This study examines two critical aspects of electroencephalography (EEG) preprocessing: sample duration and sample rejection. Typically, researchers utilize a one-second sample, spanning from 0.2 seconds before to 0.8 seconds after a stimulus. We explore various sample durations, specifically [1.0, 1.2, 1.4, 1.6, 1.8, 2.0] seconds. It is hypothesized that longer durations may enhance results due to the inclusion of more information. However, considering the primary objective of event-related potentials (ERP) is to introduce stimuli for signal-to-noise ratio (SNR) enhancement, extended samples might inadvertently incorporate noise data. Another preprocessing step investigated is sample rejection, based on peakto-peak (PTP) signal amplitude. We establish a minimum acceptable threshold for signal amplitude, rejecting samples that fall below this threshold. Continuing from the previous section, the rationale behind PTP sample rejection is the assumption that samples with high PTP values are likely to be noisy and their removal might enhance the performance of brainwave-based authentication systems. Our investigation focuses on determining whether this preprocessing step can indeed improve the efficacy of brainwave authentication and, if so, identifying the optimal threshold level for PTP sample rejection.

Figure 4 presents the EER results for the sample duration experiment. The results indicate that longer samples may enhance outcomes in shallow classifiers, but no significant improvement was observed in the case of Twin neural networks. It is important to note that for longer samples (e.g., 2 seconds), it was necessary to downsample the sample to mitigate the increased data dimensionality, a step taken due to hardware limitations as suggested in source code of BrainNet [27] paper as well.

Figure 5 displays EER across various PTP rejection thresholds. Results show that for classifiers like LR, LDA, and NB, a lower threshold results in a reduced EER. In contrast, RF and SVM displayed no specific trend, and their performance without sample rejection already surpassed other shallow classifiers. For the Twin Neural Network, sample rejection had either no effect or a negative impact. Overall, the study found no significant improvement attributable to PTP rejection.

4.2. Feature Extraction

We explored Power Spectral Density (PSD) and Autoregressive (AR) models of different orders as feature extraction methods typically employed in shallow classifiers. Figure 6 illustrates the EER for various configurations of feature extraction across different classifiers. The findings suggest that the combination of PSD with AR of order 1 yields superior performance compared to other combinations. Following this, PSD features alone demonstrate promising results, whereas AR on its own fails to show stable and robust outcomes. Interestingly, in the BrainInvaders15a dataset, the AR of order 1 outperformed most classifiers. In the ERPCORE_P300 dataset, PSD was the predominant feature leading to superior performance across most classifiers. Additionally, in the COG_BCI dataset, a higher AR order demonstrated better performance compared to lower AR orders. These results substantiate our assertion that analyzing a single dataset can yield results that are not generalizable to other datasets. However, it is noteworthy that across all these datasets, the combination of PSD with AR order 1 consistently appears among the top-performing features. Consequently, we will utilize these features in the subsequent sections of this paper as the default feature set for shallow classifiers.

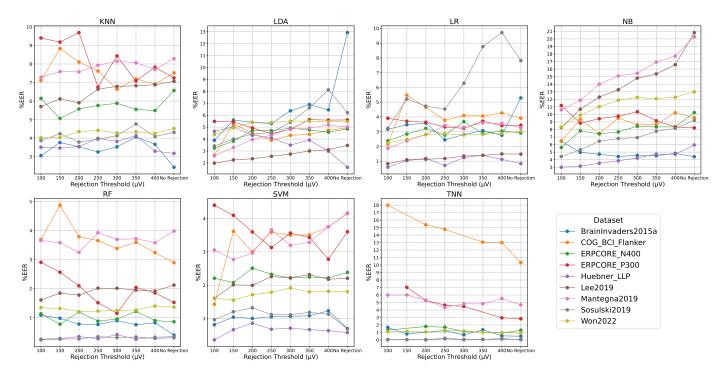


Figure 5: Influence of varying sample rejection thresholds, spanning from 100 to 400 microvolts, as well as scenarios with no rejection, on the performance outcomes of seven authentication algorithms. The investigation is conducted across nine distinct datasets, employing the EER as the metric for comprehensive performance assessment, and performance assessment is done under an unknown attacker scenario.

4.3. Known and UnKnown Attacker Approach

The known attacker model represents an unrealistic scenario; however, given its existence in some previous studies, we investigated the performance gap between known and unknown attacker scenarios. Figure 7 displays the EER for these two scenarios, based on an sample duration of 1 second to ensure comparability with previous work. This analysis was conducted without sample rejection and utilized PSD combined with AR order 1 as the feature extraction method for shallow classifiers.

The results reveal that the mean EER across datasets degraded by 58.44% for KNN, 275.60% for LDA, 383.91% for LR, 5.83% for NB, 75.94% for RF, 66.61% for SVM, and 75.88% for the Twin neural network approach. Notably, in some cases, the EER increased several-fold. These findings suggest that results derived from the known attacker model can be misleading, emphasizing the need for researchers to exercise caution and potentially avoid using this model in their analyses.

4.4. Single Session vs. Multi Session Authentication

For the practical application of brainwave authentication, it is essential to develop a model capable of handling multisession authentication. However, there is a notable limitation in the availability of datasets for multi-session studies. Our investigation focuses on comparing single-session and multisession authentication to understand the performance gap between these two approaches. We expect an increase in EER for multi-session authentication, as it represents a more complex challenge. This increase in difficulty is attributed to additional noise factors inherent in multi-session settings. Additionally, variations in EEG electrode placement across sessions and

possible changes in brain states add to the complexity, making multi-session authentication a more challenging task compared to single-session scenarios.

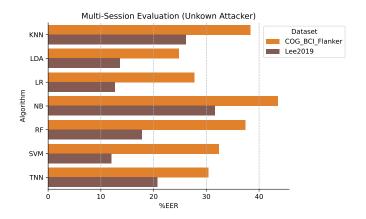


Figure 8: Comparing the effectiveness of shallow classifiers and TNN for authentication against unknown attackers in two multi-session datasets.

Figure 8 presents the results for multi-session authentication, where the results indicate a significant increase in EER compared to the single-session results shown in Figure 7. Notably, LDA and LR, which were not among the best performers in the single-session scenario, show more promising results in the multi-session context. These findings highlight the need for further research focused on multi-session scenarios to better understand and improve authentication performance in these more complex settings. The average EERs of 21% and 30% in multi-session scenarios indicate limitations in

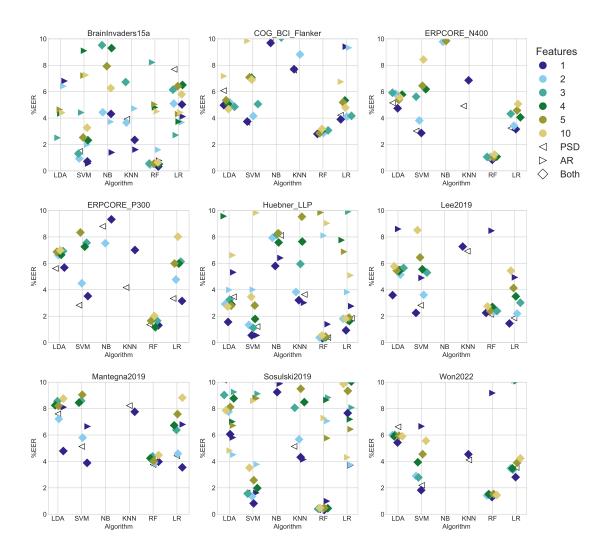


Figure 6: Comparative performance evaluation of nine datasets under unknown attacker scenario: Employing shallow classifiers and time-frequency domain features, evaluated by EER.

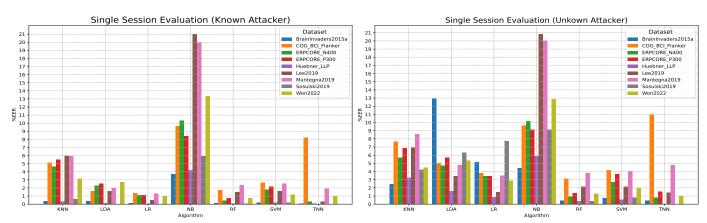


Figure 7: Examining the effects of known and unknown attacker models on EER in brainwave authentication across various classifiers and datasets

the practical implementation of a brainwave biometric authentication system, especially considering the False Rejection Rate (FNMR) at False Acceptance Rates (FMR) of 1%, 0.1%, and 0.01%. These rates were respectively 72.61%, 86.70%, 89.50% for the Lee2019 dataset and 84.43%, 94.05%, 94.09% for the COG_BCI_Flanker dataset (Table 3), suggesting the need for improved models to achieve lower EERs for real-world applications.

4.5. Shallow Classifiers vs Similarity-Based Approach

Comparing the training of a general model to extract identity-specific features with training individual models for each subject based on traditional feature extraction represents two different approaches. We utilized a twin neural network (TNN) as a representative of the similarity-based approach. We anticipated that the similarity approach would yield better results, as it actively seeks to correlate features from raw brainwaves, unlike shallow classifiers which attempt to discern differences between PSD and AR features of a subject and attacker's samples.

The results revealed that the TNN approach, along with RF, was among the top-performing models in single-session results (Table 3). In multi-session results, despite having performance close to RF, other classifiers like LDA and LR showed better performance (Figure 8). This suggests the necessity for either more comprehensive data or an enhanced deep learning strategy to surpass traditional classifiers that utilize straightforward feature extraction methods.

4.6. Comparison with Related Work

The comparison of our results will initially focus on the results published by Arias et al. [24] and Fallahi et al. [27]. This is due to the establishment of our benchmark, which is based on their implementations. Moreover, both studies utilized the ER-PCORE [36] P300 and N400 datasets, similar to our approach. Arias et al. [24] investigate the performance of different shallow classifiers within single-session brainwave authentication. The results indicate 1.9% EER for N400 and 3% EER for P300 paradigm with a sample rejection of 120 µV and RF classifier, we observe the same results where we achieved 2.9% EER for P300 and 1.13% EER to N400 paradigm with the sample rejection of 100 μV and RF classifier. Also, Fallahi et al. [27] acquired 2.01% and 1.37% respectively for P300 and N400 ER-PCORE and 0.14 for P300:bi2015a dataset [76], where we obtained %1.53, 0.83%, and 0.43 respectively. As can be observed the results are fairly similar and trends are the same. The small difference in results could be from a different random seed, version of libraries, and some evaluation parameters like epoch rejection rate for shallow classifiers and number of epochs for twin neural networks. To enhance the reproducibility of our result, we provided a docker container in the GitHub of NeuroIDBench.

Preprocessing: Our results about the impact of sample duration corroborate prior research on shallow classifiers, which indicates that longer sample durations can result in reduced EER or increased accuracy [24, 77, 78, 79]. However, the current

version of the twin neural network requires modification to effectively utilize longer samples.

Feature Extraction: The results of our feature extraction analysis demonstrate that PSD features notably outperform AR features, corroborating findings from Huang et al. [80]. However, there is a lack of consensus in the literature regarding the optimal order for AR features. Studies by Arias et al. [23] and Brigham [81] suggest that lower AR orders yield better results, whereas research by Kaewwit et al. [82] and Zhang et al. [70] indicates improved outcomes with higher orders. Our findings align with the former, showing that lower-order AR features are more effective in 8 out of 9 datasets analyzed.

Known and Unkown attacker: In exploring scenarios involving known and unknown attackers, Wu et al. [83] conducted research but found no notable performance decline in the unknown attacker scenario, and even reported an improvement. Similarly, Panzino et al. [84] studied the same issue and observed only a 5% decrease in accuracy. Contrarily, Arias et al.[23] and Fallahi et al.[27] reported an increase in Equal Error Rate (EER) ranging from 10% to 17.5 times. Our results indicate that the unknown attacker scenario is consistently more effective than the known attacker scenario, although the extent of this difference varies across different datasets and models. An average calculation across nine datasets and seven models shows that the EER for unknown attackers is 60.2% higher than known attacker scenarios.

Single and Multi-session: Multi-session analysis is crucial for the practical application of brainwave authentication, yet it presents heightened challenges compared to single-session scenarios. In multi-session environments, the availability of public datasets is notably scarcer, and the practice of open-source sharing becomes more constrained. Results from various studies, such as Maiorana [30], demonstrate reasonable EER as low as 4.8%. Seha et al. [85] also reported a marginal difference of less than 0.5% EER between single and multi-session scenarios under specific feature extraction methods and LDA classifiers. Furthermore, Wu et al. [83] observed a 1.3% improvement in false rejection rate performance in the second session compared to the first session in single-session scenarios. In contrast, our research reveals a significant disparity between single-session and multi-session results, with our best outcome showing an 11.99% EER. This finding aligns with Huang et al. [80], who also reported a substantial difference between within-session and cross-session evaluations. However, it is important to note that the studies by Maiorana [30], Seha et al. [85], and Wu et al. [83] do not provide public datasets or open-source code for other researchers to utilize and build upon. Therefore, there is an urgent need for more open-source and publicly available datasets in multi-session studies in this field. In fact, understanding the exact state of this challenge is crucial to determine what steps are necessary to advance the field.

Shallow Classifiers vs Similarity-Based Approach: The current trend in biometric authentication leans towards deep learning approaches. We observed the same trend in brainwave authentication where several papers based on TNN [27, 30, 34] or CNN [29] to improve authentication. However, a comparison between shallow classifiers and deep learning methods is essentiated.

Table 3: Comparative Analysis of Average EER and FNMR at 1%, 0.1%, and 0.01% FMR thresholds across nine Datasets. The evaluation encompasses both single-session and multi-session Schemes, with a focus on classifiers' performance in the unknown attacker scenario. Values are presented in percentages.

Dataset	Evaluation	Metric	KNN	LDA	LR	NB	RF	SVM	TNN
		%EER	2.44	12.92	5.14	4.45	0.46	0.74	0.43
BrainInvaders15a	Single-Session	FNMR at 1% FMR	19.87	71.26	43.39	31.55	0.69	2.06	2.12
		FNMR at 0.1% FMR	34.62	83.22	58.55	38.77	1.47	4.54	3.70
		FNMR at 0.01% FMR	46.56	89.52	71.30	45.55	2.06	6.01	5.11
		%EER	5.72	4.75	3.41	10.16	0.90	2.73	0.81
ERPCORE_N400	Single-Session	FNMR at 1% FMR	22.70	35.83	25.67	76.06	1.96	7.54	1.17
		FNMR at 0.1% FMR	45.11	72.76	68.53	94.55	4.95	15.87	3.96
		FNMR at 0.01% FMR	52.66	75.26	68.54	97.80	5.11	15.87	3.96
		%EER	6.87	5.73	3.45	9.11	1.37	3.68	1.53
ERPCORE_P300	Single-Session	FNMR at 1% FMR	26.65	39.28	30.03	59.55	4.36	10.47	4.30
		FNMR at 0.1% FMR	46.59	65.97	55.84	84.84	7.67	19.11	9.63
		FNMR at 0.01% FMR	49.88	67.50	55.88	88.83	7.83	19.11	9.63
		%EER	3.28	1.58	0.84	5.89	0.36	0.55	0.03
Huebner_LLP	Single-Session	FNMR at 1% FMR	26.48	8.41	5.06	34.01	0.31	0.51	0.02
		FNMR at 0.1% FMR	54.90	25.74	16.71	51.88	0.78	0.79	0.02
		FNMR at 0.01% FMR	74.21	54.26	32.76	63.84	1.38	1.19	0.05
		%EER	8.56	4.76	3.50	20.05	3.78	4.04	4.76
Mantegna2019	Single-Session	FNMR at 1% FMR	31.26	38.30	28.26	86.57	9.88	11.04	19.61
		FNMR at 0.1% FMR	58.51	71.97	63.33	96.54	22.65	23.88	46.53
		FNMR at 0.01% FMR	66.94	73.53	63.42	98.23	22.93	23.88	46.53
		%EER	4.22	6.31	7.73	9.11	0.38	0.79	0.04
Sosulski2019	Single-Session	FNMR at 1% FMR	21.60	33.08	28.77	50.93	0.42	1.59	0.01
		FNMR at 0.1% FMR	45.47	37.98	35.01	63.00	0.68	3.34	0.05
		FNMR at 0.01% FMR	65.65	45.01	41.66	76.08	1.09	4.94	0.09
		%EER	4.46	5.33	2.86	12.89	1.27	1.96	1.02
Won2022	Single-Session	FNMR at 1% FMR	18.37	45.10	27.72	84.48	3.38	4.93	2.07
		FNMR at 0.1% FMR	44.87	76.98	69.14	96.63	8.88	13.68	8.66
		FNMR at 0.01% FMR	67.33	89.96	84.89	98.84	14.82	20.06	14.31
		%EER	7.69	5.05	3.82	9.62	3.16	4.18	11.00
COG_BCI_Flanker	Single-Session	FNMR at 1% FMR	32.11	36.73	27.70	56.51	11.30	14.25	51.74
		FNMR at 0.1% FMR	52.84	57.97	49.48	70.61	16.97	21.00	62.66
		FNMR at 0.01% FMR	57.13	59.91	49.51	73.15	17.23	21.00	62.66
		Ø EED	20.25	24.90	27.75	12.51	27.44	22.20	20.27
COC DCI Ell	M-14: C:	%EER	38.35	24.80	27.75	43.54	37.44	32.39	30.37
COG_BCI_Flanker	Multi-Session	FNMR at 1% FMR	82.36	82.63	79.68	92.20	83.64	76.98	84.43
		FNMR at 0.1% FMR	92.44	90.18	88.06	96.65	88.68	84.08	94.05
		FNMR at 0.01% FMR	94.11	90.29	88.06	97.11	88.87	84.08	94.09
2010	C: 1 C :	%EER	6.93	3.47	1.48	20.85	2.14	2.17	1.39
Lee2019	Single-Session	FNMR at 1% FMR	20.71	26.65	10.79	90.89	4.90	4.56	3.53
		FNMR at 0.1% FMR	42.90	58.43	38.52	97.18	11.11	11.63	13.56
		FNMR at 0.01% FMR	58.08	71.00	52.93	97.96	14.06	15.70	19.39
		%EER	26.13	13.63	12.65	31.64	17.73	11.99	20.68
Lee2019	Multi-Session	FNMR at 1% FMR	63.67	66.56	58.93	94.84	55.84	45.57	72.61
Lee2019	1.1010 00001011	FNMR at 0.1% FMR	82.23	85.21	84.53	99.50	70.39	62.54	86.70

tial. This is because the scarcity of data can hinder the training of deep learning networks, particularly in managing the high variation in brainwave data. Several studies [86, 27] demonstrate that deep learning approaches can outperform shallow classifiers. However, our large-scale benchmark emphasizes, despite the impressive results of TNN, they do not consistently surpass shallow classifies, Notably, in multi-session scenarios, TNNs underperform, potentially due to insufficient data to accommodate the high variability between sessions.

5. Conclusion and Future Work

In conclusion, NeuroIDBench is presented as a comprehensive benchmarking tool for EEG authentication, particularly supporting ERP-based methods. As an open-source platform, it currently supports 9 datasets and 7 classifiers. It can easily be adapted to include new datasets and classifiers, allowing for the investigation of different methodological research questions. Our results highlight that epoch rejection does not significantly affect outcomes. PSD combined with AR order 1 emerges as a recommended default feature set for shallow classifiers. Known attacker evaluation can misleadingly indicate lower EER. Multi-session evaluation is significantly more challenging than single-session evaluation. Moreover, it appears that due to the limited availability of data, deep learning approaches do not consistently outperform shallow classifiers in brainwave-based authentication.

We encourage researchers to contribute to this open-source project, aiding in the development of more practical and diverse EEG-based authentication systems.

Acknowledgements

This work was funded by the Helmholtz Association (HGF) within topic "46.23 Engineering Secure Systems" (KASTEL Security Research Labs) and Germany's Excellence Strategy (EXC 2050/1 'CeTI'; ID 390696704). We thank the textician of KASTEL Security Research Labs for assistance and support in the research communication.

References

- [1] A. K. Y. S. Mohamed, D. Auer, D. Hofer, J. Küng, A systematic literature review for authorization and access control: definitions, strategies and models, International Journal of Web Information Systems 18 (2/3) (2022) 156–180.
- [2] S. Alroomi, F. Li, Measuring website password creation policies at scale, in: Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security, 2023, pp. 3108–3122.
- [3] V. Taneski, M. Heričko, B. Brumen, Password security—no change in 35 years?, in: 2014 37th International Convention on Information and Communication Technology, Electronics and Microelectronics (MIPRO), IEEE, 2014, pp. 1360–1365.
- [4] Q. Gui, M. V. Ruiz-Blondet, S. Laszlo, Z. Jin, A survey on brain biometrics, ACM Computing Surveys (CSUR) 51 (6) (2019) 1–38.
- [5] epoc, EPOC+ 14 Channel EEG emotiv.com, https://www.emotiv.com/epoc/, [Accessed 22-08-2023] (2023).
- [6] DSI-VR300 First Dry EEG with VR Headset Integration. URL https://www.neurospec.com/Products/Details/1077/dsi-vr300

- [7] Muse. The brain Sensing Headband. URL https://choosemuse.com/muse-2/
- [8] Galea: Bringing next generation neurotechnology to mixed reality. URL https://galea.co
- [9] S. Stephenson, B. Pal, S. Fan, E. Fernandes, Y. Zhao, R. Chatterjee, Sok: Authentication in augmented and virtual reality, in: 2022 IEEE Symposium on Security and Privacy (SP), IEEE, 2022, pp. 267–284.
- [10] S. Zhang, L. Sun, X. Mao, C. Hu, P. Liu, et al., Review on eeg-based authentication technology, Computational Intelligence and Neuroscience 2021 (2021).
- [11] F. Lin, K. W. Cho, C. Song, W. Xu, Z. Jin, Brain password: A secure and truly cancelable brain biometrics for smart headwear, in: Proceedings of the 16th Annual International Conference on Mobile Systems, Applications, and Services, 2018, pp. 296–309.
- [12] A. J. Bidgoly, H. J. Bidgoly, Z. Arezoumand, A survey on methods and challenges in eeg based authentication, Computers & Security 93 (2020) 101788.
- [13] A. J. Mansfield, J. L. Wayman, Best practices in testing and reporting performance of biometric devices (2002).
- [14] M. Wang, W. Deng, Deep face recognition: A survey, Neurocomputing 429 (2021) 215–244.
- [15] B. Rim, J. Kim, M. Hong, Fingerprint classification using deep learning approach, Multimedia Tools and Applications 80 (2021) 35809–35825.
- [16] S. Minaee, A. Abdolrashidi, H. Su, M. Bennamoun, D. Zhang, Biometrics recognition using deep learning: A survey, Artificial Intelligence Review (2023) 1–49.
- [17] E. Niedermeyer, F. L. da Silva, Electroencephalography: basic principles, clinical applications, and related fields, Lippincott Williams & Wilkins, 2005.
- [18] L. Hu, Z. Zhang, EEG signal processing and feature extraction, Springer, 2019.
- [19] L. F. Haas, Hans berger (1873–1941), richard caton (1842–1926), and electroencephalography, Journal of Neurology, Neurosurgery & Psychiatry 74 (1) (2003) 9–9.
- [20] H. Adeli, S. Ghosh-Dastidar, Automated EEG-based diagnosis of neurological disorders: Inventing the future of neurology, CRC press, 2010.
- [21] A. Kawala-Sterniuk, N. Browarska, A. Al-Bakri, M. Pelc, J. Zygarlicki, M. Sidikova, R. Martinek, E. J. Gorzelanczyk, Summary of over fifty years with brain-computer interfaces—a review, Brain Sciences 11 (1) (2021) 43.
- [22] ISO, Information technology Vocabulary Part 37: Biometrics, Standard, International Organization for Standardization and International Electrotechnical Commission (Mar. 2022).
- [23] P. Arias-Cabarcos, M. Fallahi, T. Habrich, K. Schulze, C. Becker, T. Strufe, Performance and usability evaluation of brainwave authentication techniques with consumer devices, ACM Transactions on Privacy and Security (2023).
- [24] P. Arias-Cabarcos, T. Habrich, K. Becker, C. Becker, T. Strufe, Inexpensive brainwave authentication: new techniques and insights on user acceptance, in: Proceedings of the 30th {USENIX} Security Symposium ({USENIX} Security 21), 2021, pp. 55–72.
- [25] B. C. Armstrong, M. V. Ruiz-Blondet, N. Khalifian, K. J. Kurtz, Z. Jin, S. Laszlo, Brainprint: Assessing the uniqueness, collectability, and permanence of a novel method for erp biometrics, Neurocomputing 166 (2015) 59–67.
- [26] V. Jayaram, A. Barachant, Moabb: trustworthy algorithm benchmarking for bcis, Journal of neural engineering 15 (6) (2018) 066011.
- [27] M. Fallahi, T. Strufe, P. Arias-Cabarcos, Brainnet: Improving brainwave-based biometric recognition with siamese networks, in: 2023 IEEE International Conference on Pervasive Computing and Communications (Per-Com), IEEE, 2023, pp. 53–60.
- [28] L. Hernández-Álvarez, E. Barbierato, S. Caputo, L. Mucchi, L. Hernández Encinas, Eeg authentication system based on oneand multi-class machine learning classifiers, Sensors 23 (1) (2022) 186.
- [29] A. J. Bidgoly, H. J. Bidgoly, Z. Arezoumand, Towards a universal and privacy preserving eeg-based authentication system, Scientific Reports 12 (1) (2022) 2531.
- [30] E. Maiorana, Learning deep features for task-independent eeg-based biometric verification, Pattern Recognition Letters 143 (2021) 122–129.
- [31] J. Sooriyaarachchi, S. Seneviratne, K. Thilakarathna, A. Y. Zomaya,

- Musicid: A brainwave-based user authentication system for internet of things, IEEE Internet of Things Journal 8 (10) (2020) 8304–8313.
- [32] E. Gupta, M. Agarwal, R. Sivakumar, Blink to get in: Biometric authentication for mobile devices using eeg signals, in: ICC 2020-2020 IEEE International Conference on Communications (ICC), IEEE, 2020, pp. 1–6.
- [33] I. Nakanishi, T. Maruoka, Biometric authentication using evoked potentials stimulated by personal ultrasound, in: 2019 42nd International Conference on Telecommunications and Signal Processing (TSP), IEEE, 2019, pp. 365–368.
- [34] T. Schons, G. J. Moreira, P. H. Silva, V. N. Coelho, E. J. Luz, Convolutional network for eeg-based biometric, in: Progress in Pattern Recognition, Image Analysis, Computer Vision, and Applications: 22nd Iberoamerican Congress, CIARP 2017, Valparaíso, Chile, November 7–10, 2017, Proceedings 22, Springer, 2018, pp. 601–608.
- [35] R. Das, E. Maiorana, P. Campisi, Eeg biometrics using visual stimuli: A longitudinal study, IEEE Signal Processing Letters 23 (3) (2016) 341– 345
- [36] E. S. Kappenman, J. L. Farrens, W. Zhang, A. X. Stewart, S. J. Luck, Erp core: An open resource for human event-related potential research, NeuroImage 225 (2021) 117465.
- [37] G. Schalk, D. J. McFarland, T. Hinterberger, N. Birbaumer, J. R. Wolpaw, Bci2000: a general-purpose brain-computer interface (bci) system, IEEE Transactions on biomedical engineering 51 (6) (2004) 1034–1043.
- [38] D. Olszewski, A. Lu, C. Stillman, K. Warren, C. Kitroser, A. Pascual, D. Ukirde, K. Butler, P. Traynor, "get in researchers; we're measuring reproducibility": A reproducibility study of machine learning papers in tier 1 security conferences, in: Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security, 2023, pp. 3433– 3459.
- [39] V. Jayaram, A. Barachant, Moabb: trustworthy algorithm benchmarking for bcis, Journal of neural engineering 15 (6) (2018) 066011.
- [40] J. Pijnacker, N. Davids, M. van Weerdenburg, L. Verhoeven, H. Knoors, P. van Alphen, Semantic processing of sentences in preschoolers with specific language impairment: Evidence from the n400 effect, Journal of Speech, Language, and Hearing Research 60 (3) (2017) 627–639.
- [41] D. Draschkow, E. Heikel, M. L.-H. Vo, C. J. Fiebach, J. Sassenhagen, No evidence from mvpa for different processes underlying the n300 and n400 incongruity effects in object-scene processing, Neuropsychologia 120 (2018) 9–17.
- [42] A. Marzecová, A. Schettino, A. Widmann, I. SanMiguel, S. A. Kotz, E. Schröger, Attentional gain is modulated by probabilistic feature expectations in a spatial cueing task: Erp evidence, Scientific Reports 8 (1) (2018) 54.
- [43] F. Mantegna, F. Hintz, M. Ostarek, P. M. Alday, F. Huettig, Distinguishing integration and prediction accounts of erp n400 modulations in language processing through experimental design, Neuropsychologia 134 (2019) 107199.
- [44] A. Hodapp, M. Rabovsky, The n400 erp component reflects an error-based implicit learning signal during language comprehension, European Journal of Neuroscience 54 (9) (2021) 7125–7140.
- [45] E. Rabs, F. Delogu, H. Drenhaus, M. W. Crocker, Situational expectancy or association? the influence of event knowledge on the n400, Language, Cognition and Neuroscience 37 (6) (2022) 766–784.
- [46] P. Schoknecht, D. Roehm, M. Schlesewsky, I. Bornkessel-Schlesewsky, The interaction of predictive processing and similarity-based retrieval interference: an erp study, Language, Cognition and Neuroscience 37 (7) (2022) 883–901.
- [47] K. K. Toffolo, E. G. Freedman, J. J. Foxe, Evoking the n400 event-related potential (erp) component using a publicly available novel set of sentences with semantically incongruent or congruent eggplants (endings), Neuroscience 501 (2022) 143–158.
- [48] A. Lindborg, L. Musiolek, D. Ostwald, M. Rabovsky, Semantic surprise predicts the n400 brain potential, Neuroimage: Reports 3 (1) (2023) 100161.
- [49] M. F. Hinss, E. S. Jahanpour, B. Somon, L. Pluchon, F. Dehais, R. N. Roy, Open multi-session and multi-task eeg cognitive dataset for passive brain-computer interface applications, Scientific Data 10 (1) (2023) 85.
- [50] K. Stone, B. Nicenboim, S. Vasishth, F. Rösler, Understanding the effects of constraint and predictability in erp, Neurobiology of Language 4 (2) (2023) 221–256.

- [51] G. Van Veen, A. Barachant, A. Andreev, G. Cattan, P. C. Rodrigues, M. Congedo, Building brain invaders: Eeg data of an experimental validation, arXiv preprint arXiv:1905.05182 (2019).
- [52] E. Vaineau, A. Barachant, A. Andreev, P. C. Rodrigues, G. Cattan, M. Congedo, Brain invaders adaptive versus non-adaptive p300 braincomputer interface dataset, arXiv preprint arXiv:1904.09111 (2019).
- [53] L. Korczowski, E. Ostaschenko, A. Andreev, G. Cattan, P. L. C. Rodrigues, V. Gautheret, M. Congedo, Brain invaders calibration-less p300based bci using dry eeg electrodes dataset (bi2014a), Ph.D. thesis, GIPSA-lab (2019).
- [54] L. Korczowski, E. Ostaschenko, A. Andreev, G. Cattan, P. L. C. Rodrigues, V. Gautheret, M. Congedo, Brain invaders solo versus collaboration: Multi-user p300-based brain-computer interface dataset (bi2014b), Ph.D. thesis, GIPSA-lab (2019).
- [55] J. Gao, H. Tian, Y. Yang, X. Yu, C. Li, N. Rao, A novel algorithm to enhance p300 in single trials: Application to lie detection using f-score and svm, Plos one 9 (11) (2014) e109700.
- [56] L. Korczowski, M. Cederhout, A. Andreev, G. Cattan, P. L. C. Rodrigues, V. Gautheret, M. Congedo, Brain invaders calibration-less p300-based bci with modulation of flash duration dataset (bi2015a), Ph.D. thesis, GIPSAlab (2019).
- [57] L. Korczowski, M. Cederhout, A. Andreev, G. Cattan, P. L. C. Rodrigues, V. Gautheret, M. Congedo, Brain invaders cooperative versus competitive: Multi-user p300-based brain-computer interface dataset (bi2015b), Ph.D. thesis, GIPSA-lab (2019).
- [58] R. Mouček, L. Vařeka, T. Prokop, J. Štěbeták, P. Brůha, Event-related potential data from a guess the number brain-computer interface experiment on school children, Scientific data 4 (1) (2017) 1–11.
- [59] D. Hübner, T. Verhoeven, K. Schmid, K.-R. Müller, M. Tangermann, P.-J. Kindermans, Learning from label proportions in brain-computer interfaces: Online unsupervised learning with guarantees, PloS one 12 (4) (2017) e0175856.
- [60] J. Sosulski, M. Tangermann, Spatial filters for auditory evoked potentials transfer between different experimental conditions., in: GBCIC, 2019.
- [61] M.-H. Lee, O.-Y. Kwon, Y.-J. Kim, H.-K. Kim, Y.-E. Lee, J. Williamson, S. Fazli, S.-W. Lee, Eeg dataset and openbmi toolbox for three bci paradigms: An investigation into bci illiteracy, GigaScience 8 (5) (2019) giz002.
- [62] M. Simões, D. Borra, E. Santamaría-Vázquez, GBT-UPM, M. Bittencourt-Villalpando, D. Krzemiński, A. Miladinović, Neural_Engineering_Group, T. Schmid, H. Zhao, et al., Bciaut-p300: A multi-session and multi-subject benchmark dataset on autism for p300based brain-computer-interfaces, Frontiers in Neuroscience 14 (2020) 568104.
- [63] V. Goncharenko, R. Grigoryan, A. Samokhina, Raccoons vs demons: Multiclass labeled p300 dataset, arXiv preprint arXiv:2005.02251 (2020).
- [64] A. Houshmand Chatroudi, R. Rostami, A. M. Nasrabadi, Y. Yotsumoto, Effect of inhibition indexed by auditory p300 on transmission of visual sensory information, Plos one 16 (2) (2021) e0247416.
- [65] P. Cunningham, S. J. Delany, Underestimation bias and underfitting in machine learning, in: Trustworthy AI-Integrating Learning, Optimization and Reasoning: First International Workshop, TAILOR 2020, Virtual Event, September 4–5, 2020, Revised Selected Papers 1, Springer, 2021, pp. 20–31.
- [66] K. Won, M. Kwon, M. Ahn, S. C. Jun, Eeg dataset for rsvp and p300 speller brain-computer interfaces, Scientific Data 9 (1) (2022) 388.
- [67] T. W. Picton, et al., The p300 wave of the human event-related potential, Journal of clinical neurophysiology 9 (1992) 456–456.
- [68] J. B. Debruille, J. Pineda, B. Renault, N400-like potentials elicited by faces and knowledge inhibition, Cognitive Brain Research 4 (2) (1996) 133–144.
- [69] J. Pardey, S. Roberts, L. Tarassenko, A review of parametric modelling techniques for eeg analysis, Medical engineering & physics 18 (1) (1996) 2–11
- [70] Y. Zhang, B. Liu, X. Ji, D. Huang, Classification of eeg signals based on autoregressive model and wavelet packet decomposition, Neural Processing Letters 45 (2017) 365–378.
- [71] C. Cómez, M. Vazquez, E. Vaquero, D. Lopez-Mendoza, M. Cardoso, Frequency analysis of the eeg during spatial selective attention, International Journal of Neuroscience 95 (1-2) (1998) 17–32.
- [72] T. Hastie, R. Tibshirani, J. H. Friedman, J. H. Friedman, The elements

- of statistical learning: data mining, inference, and prediction, Vol. 2, Springer, 2009.
- [73] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, et al., Scikitlearn: Machine learning in python, the Journal of machine Learning research 12 (2011) 2825–2830.
- [74] A. Jain, R. Bolle, S. Pankanti, Introduction to biometrics, Springer, 1996.
- [75] A. A. Ross, K. Nandakumar, A. K. Jain, Handbook of multibiometrics, Vol. 6, Springer Science & Business Media, 2006.
- [76] L. Korczowski, M. Cederhout, A. Andreev, G. Cattan, P. L. C. Rodrigues, V. Gautheret, M. Congedo, Brain invaders calibration-less p300-based bci with modulation of flash duration dataset (bi2015a), Ph.D. thesis, GIPSAlab (2019).
- [77] N. Tran, D. Tran, S. Liu, W. Ma, T. Pham, Eeg-based person authentication system in different brain states, in: 2019 9th International IEEE/EMBS Conference on Neural Engineering (NER), IEEE, 2019, pp. 1050–1053.
- [78] D. Carrión-Ojeda, H. Mejía-Vallejo, R. Fonseca-Delgado, P. Gómez-Gil, M. Ramírez-Cortés, A method for studying how much time of eeg recording is needed to have a good user identification, in: 2019 IEEE Latin American Conference on Computational Intelligence (LA-CCI), IEEE, 2019, pp. 1–6.
- [79] R. Suppiah, A. P. Vinod, Biometric identification using single channel eeg during relaxed resting state, IET Biometrics 7 (4) (2018) 342–348.
- [80] G. Huang, Z. Hu, W. Chen, S. Zhang, Z. Liang, L. Li, L. Zhang, Z. Zhang, M3cv: A multi-subject, multi-session, and multi-task database for eegbased biometrics challenge, NeuroImage 264 (2022) 119666.
- [81] K. Brigham, B. V. Kumar, Subject identification from electroencephalogram (eeg) signals during imagined speech, in: 2010 Fourth IEEE International Conference on Biometrics: Theory, Applications and Systems (BTAS), IEEE, 2010, pp. 1–8.
- [82] C. Kaewwit, C. Lursinsap, P. Sophatsathit, High accuracy eeg biometrics identification using ica and ar model, Journal of Information and Communication Technology (JICT) 16 (2) (2017) 354–373.
- [83] Q. Wu, Y. Zeng, C. Zhang, L. Tong, B. Yan, An eeg-based person authentication system with open-set capability combining eye blinking signals, Sensors 18 (2) (2018) 335.
- [84] A. Panzino, G. Orrù, G. L. Marcialis, F. Roli, Eeg personal recognition based on 'qualified majority' over signal patches, IET Biometrics 11 (1) (2022) 63–78.
- [85] S. N. A. Seha, D. Hatzinakos, A new approach for eeg-based biometric authentication using auditory stimulation, in: 2019 International Conference on Biometrics (ICB), IEEE, 2019, pp. 1–6.
- [86] E. Debie, N. Moustafa, A. Vasilakos, Session invariant eeg signatures using elicitation protocol fusion and convolutional neural network, IEEE Transactions on Dependable and Secure Computing 19 (4) (2021) 2488– 2500.

Appendix A. Receiver Operating Characteristic (ROC) Curves

ROC curves play a pivotal role in assessing the performance of biometric systems like brainwave authentication. These curves provide a graphical representation of the system's ability to distinguish between genuine users and impostors by plotting FMR against 1-FNMR across various threshold values. In brainwave authentication systems, ROC curves help in determining the optimal threshold for achieving the desired balance between sensitivity and specificity, thereby ensuring the system's effectiveness in accurately identifying authorized users while minimizing the risk of false positives and false negatives.

Appendix A.1. Single Session Evaluation (Unknown Attacker Scenario)




Figure A.9: ROC for dataset BrainInvaders15a in Single Session Evaluation under unknown attacker Scenario.




Figure A.10: ROC for dataset COG_BCI_Flanker in Single Session Evaluation under unknown attacker Scenario.




Figure A.11: ROC for dataset ERPCORE_N400 in Single Session Evaluation under unknown attacker Scenario.




Figure A.12: ROC for dataset ERPCORE_P300 in Single Session Evaluation under unknown attacker Scenario.




Figure A.13: ROC for dataset Huebner_LLP in Single Session Evaluation under unknown attacker Scenario.




Figure A.14: ROC for dataset Mategna2019 in Single Session Evaluation under unknown attacker Scenario.




Figure A.15: ROC for dataset Won2022 in Single Session Evaluation under unknown attacker Scenario.




Figure A.16: ROC for dataset Lee2019 in Single Session Evaluation under unknown attacker Scenario.




Figure A.17: ROC for dataset Lee2019 in Single Session Evaluation under unknown attacker Scenario.

Appendix A.2. Multi Session Evaluation (Unknown Attacker Scenario)




Figure A.18: ROC for dataset COG_BCI_Flanker in Multi Session Evaluation under unknown attacker Scenario.




Figure A.19: ROC for dataset Lee2019 in Multi Session Evaluation under unknown attacker Scenario.

Appendix B. Installation and Running the tool

The benchmarking tool is available on our Github repository ⁴. Developed in Python, the tool leverages various statistical and machine-learning libraries, necessitating the establishment of a Python environment as a preliminary step. The subsequent procedures delineate the steps to set up the operational environment and replicate outcomes utilizing the NeuroIDBench tool.

Appendix B.1. Establishing the Running Environment

The first step after extracting the tool from Github is to set up the running environment first. An optimal approach that involves creating a Python virtual environment dedicated to the framework, achieved through the creation of a Conda environment. This environment encapsulates all Python dependencies essential for executing the tool seamlessly. Alternatively, users may opt to containerize the Python package using Docker, thereby providing an isolated environment that encapsulates all dependencies required to execute the tool within the container. This approach ensures reproducibility and facilitates the seamless deployment of the benchmarking tool.

Setting up the Conda Environment

To successfully run this Python project, creating and configuring a suitable Python environment is essential. The following steps need to be followed to set up the environment:

- 1. **Python Installation**: Initially, verifying the presence of Python in our operating system is crucial. If Python is not pre-installed, it can be acquired straight from the official Python⁵ website. Subsequently, we adhere to the installation instructions outlined in the website, customized to suit our operating system. If Anaconda has been successfully installed, it is noteworthy to mention that the Anaconda installation often includes the Python programming language. If the action above is taken, it is possible to go to the subsequent stage.
- 2. Anaconda Installation (if needed): Suppose Anaconda is not currently installed, and it is desired to utilize it to manage Python environments. In that case, it is possible to get the software by downloading it from the official website, which can be accessed at Anaconda 6 website. Installation may be accomplished according to the instructions tailored to each operating system. Anaconda provides a user-friendly method for creating and administrating virtual environments through the use of Conda. This specific characteristic has significant value in data science and scientific computing initiatives.
- 3. **Virtual Environment Creation**: It is advisable to establish a virtual environment to segregate the dependencies of

this specific project from other Python packages installed on our system. Virtual environments help maintain clean and distinct Python environments for individual projects. To create a virtual environment, follow these steps:

- Navigate to Project Directory: To begin, we access the terminal or command prompt and proceed to the project's root directory by utilizing the *cd* command. For example: cd /path/to/project
- Environment Configuration File: Check if the project includes an environment configuration file. This file is typically named *environment.yml* or *requirements.txt* and lists the required Python packages and their versions.
- Create Virtual Environment:Subsequently, the requisite command is executed to generate a virtual environment by using the configuration file. An example of a command that may be used for Conda environments is the use of a *environment.yml* file: For example: conda env create -f environment.yml

we can also utilize *requirement.txt* to create the virtual environment by using the pip command: python -m venv venv

source venv/bin/activate pip install -r requirements.txt

4. Activate the Virtual Environment: After the virtual environment has been established, proceed to activate it. Activation is a crucial process that guarantees using an isolated environment and its corresponding dependencies in our project. To activate the conda environment, it is necessary to utilize the proper command according to the operating system in use:

For example: conda activate master_thesis (for MacOS/Linux)

Setting up Docker Container

To containerize a project, we typically use a tool like Docker. Here's a step-by-step guide on how to do it:

- 1. Install Docker on the local machine if we have not already. Install docker from the official Docker ⁷ website.
- Create a **dockerfile** in the root directory of the framework. This file will contain the instructions for Docker to build our container.
- 3. Get the Python docker image python:3.8-slim-buster from Docker Hub ⁸.

⁴https://github.com/Avichaurasia/NeuroIDBench.git

⁵https://https://www.python.org/downloads/

⁶https://www.anaconda.com/products/individual

⁷https://www.docker.com/

⁸https://hub.docker.com/

4. Edit the dockerfile with the following steps:

```
FROM python: 3.8-slim-buster
WORKDIR /app
ADD . /app
COPY requirements.txt ./
RUN pip install –upgrade pip
RUN apt-get update && apt-get install -y \
build-essential \
libblas-dev \
liblapack-dev \
gfortran \
libhdf5-dev \
cython \
pkg-config \
RUN pip install -no-binary=h5py h5py
RUN pip install -r new_requirements.txt
WORKDIR /app/neuroIDBench
CMD ["python", "run.py"]
```

5. Build the docker image from the dockerfile, using the following command:

docker build -t dockerfile.

Appendix B.2. YAML configurations

Once the Python environment or Docker container is developed, we need to edit the YAML configuration files that can be found as *single_dataset.yml* under the configuration_files folder. Following are some of the examples of the YAML configuration files that can be utilized to perform automated benchmarking and reproduce the results for the single dataset.

Listing 1: Benchmarking pipeline using the dataset's default parameters and auto-regressive features with SVM classification

```
name: "BrainInvaders2015a"

dataset:
   - name: BrainInvaders2015a
    from: neuroIDBench.datasets

pipelines:
   "AR+SVM":
   - name: AutoRegressive
    from: neuroIDBench.featureExtraction

   - name: SVC
    from: sklearn.svm
    parameters:
        kernel: 'rbf'
        class_weight: "balanced"
        probability: True
```

Listing 2: Benchmarking pipeline using dataset's parameters and Auto Regressive order with SVM classification

```
name: "BrainInvaders2015a"
```

```
dataset:
  - name: BrainInvaders2015a
    from: neuroIDBench.datasets
    parameters:
      subjects: 10
      interval: [-0.1, 0.9]
      rejection_threshold: 200
pipelines:
  "AR+SVM":
    - name: AutoRegressive
      from: neuroIDBench.featureExtraction
      parameters:
         order: 5
    - name: SVC
      from: sklearn.svm
      parameters:
         kernel: 'rbf'
         class_weight: "balanced"
         probability: True
Listing 3: Benchamrking pipeline for dataset BrainInvaders15a with AR and
PSD features with classifier SVM
name: "BrainInvaders2015a"
dataset:
  - name: BrainInvaders2015a
    from: neuroIDBench.datasets
    parameters:
      subjects: 10
      interval: [-0.1, 0.9]
      rejection_threshold: 200
```

```
- name: BrainInvaders2015a
   from: neuroIDBench.datasets
   parameters:
       subjects: 10
       interval: [-0.1, 0.9]
       rejection_threshold: 200

pipelines:
   "AR+PSD+SVM":
   - name: AutoRegressive
   from: neuroIDBench.featureExtraction
   parameters:
       order: 5

- name: PowerSpectralDensity
   from: neuroIDBench.featureExtraction
```

- name: SVC
from: sklearn.svm
parameters:
kernel: 'rbf'
class_weight: "balanced"
probability: True

Listing 4: Benchamrking pipeline for dataset BrainInvaders15a with Twin NN

name: "BrainInvaders2015a"

dataset:

- name: BrainInvaders2015a
 from: neuroIDBench.datasets
 parameters:
 subjects: 10

interval: [-0.1, 0.9]	interval: [-0.1, 0.9]
rejection_threshold: 200	rejection_threshold: 200
,	·
pipelines:	pipelines:
"TNN":	"TNN":
- name : TwinNeuralNetwork	- name: TwinNeuralNetwork
from: neuroIDBench.featureExtraction	from: neuroIDBench.featureExtraction
parameters:	parameters:
EPOCHS: 10	EPOCHS: 10
batch_size: 256	batch_size: 256
verbose: 1	verbose: 1
workers: 1	workers: 1
Listing 5: Benchamrking pipeline for dataset BrainInvaders15a with shallow	"AR+PSD+SVM":
classifiers and twin NN	- name: AutoRegressive
	from: neuroIDBench.featureExtraction
name: "BrainInvaders2015a"	parameters:
	order: 6
dataset:	- name: PowerSpectralDensity
- name: BrainInvaders2015a	from: neuroIDBench.featureExtraction
from: neuroIDBench.datasets	
parameters:	- name: SVC
subjects: 10	from: sklearn.svm
interval: [-0.1, 0.9]	parameters:
rejection_threshold: 200	kernel: 'rbf'
	class_weight: "balanced"
pipelines: "TNN":	probability: True
- name: TwinNeuralNetwork	Listing 7: Panahamrking pinaling for Hear is Pagaraghar's own MNE de
from: neuroIDBench.featureExtraction	Listing 7: Benchamrking pipeline for User i.e., Reseracher's own MNE da with shallow classifiers and Twin NN
parameters:	with shallow classifiers and Twin 1414
EPOCHS: 10	
batch_size: 256	name: "User"
verbose: 1	
workers: 1	dataset:
	- name: UserDataset
"AR+PSD+SVM":	from: neuroIDBench.datasets
- name: AutoRegressive	parameters:
from: neuroIDBench.featureExtraction	dataset_path: <local_dataset_path></local_dataset_path>
parameters:	
order: 6	pipelines:
	"AR+PSD+SVM":
- name: PowerSpectralDensity	- name: AutoRegressive
from: neuroIDBench.featureExtraction	from: neuroIDBench.featureExtraction
	parameters:
- name: SVC	order: 6
from: sklearn.svm	
parameters:	name: PowerSpectralDensity
kernel: 'rbf'	${\tt from: neuroIDBench.featureExtraction}$
class_weight: "balanced"	
probability: True	- name: SVC
probability. True	from: sklearn.svm
	parameters:
Listing 6: Benchamrking pipeline for multi-session dataset COGBCI:	kernel: 'rbf'
FLANKER with shallow classifiers and Twin NN	class_weight: "balanced"
name: "COGBCIFLANKER"	probability: True
dataset:	"TNN":
- name: COGBCIFLANKER	- name : TwinNeuralNetwork
from: neuroIDBench.datasets	from: neuroIDBench.featureExtraction
parameters:	parameters:
subjects: 10	EPOCHS: 10

```
batch_size: 256
verbose: 1
workers: 1

"AR+PSD+RF":
    - name: AutoRegressive
    from: neuroIDBench.featureExtraction
    parameters:
    order: 6

- name: PowerSpectralDensity
    from: neuroIDBench.featureExtraction

- name: RandomForestClassifier
    from: sklearn.ensemble
    parameters:
        class_weight: "balanced"
```

Listing 8: Benchamrking pipeline for User i.e., Reseracher's own EEG data and Researchers's own customized method for Twin NN

```
name: "User"
dataset:
  - name: UserDataset
   from: neuroIDBench.datasets
    parameters:
      dataset_path: <local_dataset_path>
pipelines:
  "TNN":
    - name : TwinNeuralNetwork
      from: neuroIDBench.featureExtraction
      parameters:
        user_tnn_path: <local_path_to_TNN>
        EPOCHS: 10
        batch_size: 256
        verbose: 1
        workers: 1
```

Appendix B.3. Automated Benchmarking

After setting the parameters for the benchmarking for single dataset. The automated benchmarking can be performed either by running the automation script from the command line terminal or by running the script within the Docker container.

Running the tool using command line terminal

Execute the following command from the root directory: python brainModels/run.py

Running the tool using Docker

Open the docker desktop installed on our local machine and execute the docker image my_dockerfile.