

Robust and Reusable Fuzzy Extractors for Low-entropy Rate Randomness Sources

Somnath Panja
University of Calgary, Canada

Shaoquan Jiang
University of Windsor, Canada

Reihaneh Safavi-Naini
University of Calgary, Canada

Abstract—Fuzzy extractors (FE) are cryptographic primitives that extract reliable cryptographic key from noisy real world random sources such as biometric sources. The FE generation algorithm takes a source sample, extracts a key and generates some *helper* data that will be used by the reproduction algorithm to recover the key. Reusability of FE guarantees that security holds when FE is used multiple times with the same source, and robustness of FE requires tampering with the helper data be detectable.

In this paper, we consider information theoretic FEs, define a strong notion of reusability, and propose *strongly robust and reusable FEs* (srrFE) that provides the strongest combined notion of reusability and robustness for FEs. We give two constructions, one for reusable FEs and one for srrFE with information theoretic (IT) security for structured sources. The constructions are for structured sources and use *sample-then-lock* approach. We discuss each construction and show their unique properties in relation to existing work.

Construction 2 is the first robust and reusable FE with IT-security without assuming random oracle. The robustness is achieved by using an IT-secure MAC with security against key-shift attack, which can be of independent interest.

Index Terms—Cryptography, Information theoretic key establishment, Fuzzy extractor, Reusable and robust fuzzy extractor

I. INTRODUCTION

Secret key establishment (SKE) is a fundamental problem in cryptography. A general model of SKE in information theoretic setting is when Alice, Bob and Eve have random variables X , Y , and Z , respectively, with a joint probability distribution P_{XYZ} , where Z summarizes Eve’s information about X and Y . Maurer [1] proved that in this setting the secret key entropy is upper-bounded by $\min[I(X;Y), I(X;Y|Z)]$ (ignoring small constants) and so key establishment is possible only if X and Y are correlated. There is a large body of research on general setting when Alice and Bob can communicate over a public authenticated channel. A special case of this general setting is called *Fuzzy Extractors* (FEs) [2] setting, in which Alice and Bob’s variables are samples of a “noisy” source, and $d(x,y) \leq t$, where d is a distance metric. Eve does not have any initial information about X and Y , and so Z is null.

The randomness source in FE (generating X and Y) naturally occurs in sampling biometrics and behavioral data [3]–[5], and so FE has been widely studied for biometric sources and in particular for biometric based authentication. In this paper we consider IT-secure FEs.

An FE has a pair of randomized algorithms, (Gen, Rep) that works as follows: Gen takes Alice’s sample w and generates a pair (R, P) where R is the secret key and P is the *helper data* that will be sent to Bob, allowing him to use it in the Rep algorithm together with his sample w' that is “close” to w , and reproduce the same secret key R .

Correctness and security are two basic properties of FEs. *Correctness* of FE requires that for a pair (R, P) that is the output of the Gen algorithm, the Rep algorithm recover R from w' and P with a probability at least $1 - \epsilon$, where probability is over the randomness of the Gen algorithm. *Security* of FE requires that the key R be indistinguishable from a uniformly random string of the same length, given the adversary’s view of the communication (that is P).

Reusability and Robustness. To use FE in practice, two additional properties are required.

Reusability of FE [6] considers security of FE output (randomness of R) when the source is used multiple times, and *robustness* requires detection of tampering of the helper data.

Reusability is important when the same source is used multiple times. For example, biometric scans of a user are used for enrolments to multiple organizations. Reusability is defined by a game between a *challenger* and the *adversary Eve*, where Eve can ask (query) the challenger to provide the output of the Gen algorithm on source samples w^1, w^2, \dots, w^η , and receive the output of the Gen algorithm, either the full (R, P) or P only, to them. Reusability requires that the value R for an output of Gen algorithm that is not directly given to Eve, remains indistinguishable from random. Robustness is defined by allowing the same type of queries by Eve, however the goal of the adversary is to tamper with the helper data (e.g. so that Bob recovers a different key).

Variations of reusability and robustness definitions capture different powers of Eve. For a secret sample w , two types of queries have been considered. In **(R1.1)**, Eve can only choose a shift value d^i , and receive the output of Gen on $w^i = w + d^i$ [6]. (In Boyen et al’s definition of reusability, Eve can choose an arbitrary distortion function that is applied on w . Known constructions are only for shift function.) In **(R1.2)** Eve is allowed to choose samples that are arbitrarily correlated with w [7]. In both cases w^i must be in “close” distance of w for Rep to succeed.

Reusability notions also vary by the type of information that Eve receives in response to their queries. In **(R2.1)** Eve

only receives P^i (the public output of the *Gen* on w^i), and in (R2.2) Eve is given the full output of *Gen* on w^i , that is $(P^i, R^i)^1$.

Robustness is also defined using similar variations in Eve's queries and received responses. *Pre-application robustness* and *post-application robustness*, respectively, correspond to the case that Eve has access to P only (R2.1) or sees (P, R) (R2.2), before modifying P and generating $P' (\neq P)$ that must be accepted by the *Rep* algorithm [8].

Robust and reusable FE (rrFE) require that robustness hold over multiple applications of FE. In η robust and reusable FE, Eve can query the *Gen* algorithm on η samples, and succeeds if it can modify one of the P_i 's without being detected by the *Rep* algorithm. Different flavours of reusability and robustness that are defined above can be straightforwardly extended to the case of η samples.

Wen et al. [9]–[11] considered rrFE model when Eve can only choose samples that are shifts of w (R1.1).

Fuzzy Extractor Constructions. Fuzzy extractors have been primarily studied for min-entropy sources where the min-entropy of the source is β .

An established approach to construct an FE is to use a *secure sketch* algorithm that generates a *helper* string that does not lose “too much” entropy, but allows w to be recovered by Bob. Alice and Bob both obtain the same key by applying an extractor (specified by a random seed) to obtain the same shared key. This approach is referred to as *sketch-and-extract* paradigm. Boyen [6] gave two general constructions of reusable FEs both using this approach and employing error correcting codes. The first construction uses a randomly selected hash function from a class of pairwise independent hash functions to extract randomness from the sample w . The second construction uses a cryptographic hash to extract randomness from the sample w , and is modelled as a random oracle in the proof.

Sketch-and-extract approach however does not work for *low-entropy sources* that are too “noisy”. That is the ratio of the min-entropy of a sample to its size is small, and the distance between w and w' is large. In this case the *Rep* algorithm will fail because the helper data will lose all the sample's entropy. Canetti et al. [7, Proposition 1] showed that (for binary sources) to produce non-zero key length, the min-entropy of a sample must be at least $t \log_2 \frac{n}{t}$ where n is the sample size and t is the upperbound on $d(w, w')$, the error in the sample that must be corrected. It was shown that an example of low entropy sources can be obtained by sampling iris data [12].

Canetti et al. [7] constructed a *computationally secure reusable FE* using a new approach, called *Sample-then-Lock*, that works for a class of *structured sources* that is called *sources with high-entropy samples*. The construction uses an idealized cryptographic primitive that is called *digital locker* and in the construction in [7], is instantiated by a hash func-

tion. The proof of security is in the random oracle model and abstract the hash function as a *random oracle*. The approach works for structured sources in which random subsamples of a sample have sufficiently high min-entropy.

A. Our work

We define IT-secure *strongly robust and reusable FE (sr-rFE)*, and construct first, a *reusable FE (Construction 1)* and then extend it to an *IT-secure sr-rFE (Construction 2)*. We use the term ‘strongly’ to emphasize that Eve's queries can be arbitrarily correlated with w (R1.2), and reusability is in the sense of R2.2. The sr-rFE is the first and the only known construction of an IT secure sr-rFE in *standard model* and without assuming random oracles [7].

Both constructions are for *structured sources that are called (α, m, N) conditional entropy sources* (Definition 6). In these sources random sub-samples of length m of a sample w , conditioned on substrings of length N of w , have at least α bits of entropy. For $N = 0$ we obtain the structured source that was used in [7]. *Robustness* is achieved in *CRS (Common Randomness String) model*. In this model, parties have access to a public uniformly random string that is independent of the source sample. CRS model had also been used in all known rrFEs [9], [11], [13] that are computationally secure, and so one expects the model when the adversary is more powerful (information theoretic).

Overview of the construction. We use a *strong average case extractor* to extract uniform randomness from subsamples of the source (that are guaranteed to have sufficient min-entropy) and use them as the pad in a One-Time-Pad (OTP) to encrypt, a randomly chosen key R . Alice uses ℓ subsamples and encrypts R ℓ times. Bob uses the corresponding subsamples of w' (position bits of subsamples are sent to Bob) to recover R . Successful *Rep* requires at least one pair of subsamples in w and w' to be identical. The parameter ℓ is selected to guarantee that this happens with high probability.

Our security proof of FE effectively shows encryption security of the composition of multiple OTP of the message (R); that is using the extracted randomness from the ℓ subsamples that are correlated, and using them in ℓ times OTP of the same message R does not leak any information about R to Eve.

Construction 2 is based on Construction 1, and is the first IT-secure *strongly robust and reusable fuzzy extractor (sr-rFE)* in standard model. The construction uses the CRS to allow Alice and Bob to share the same bit indexes for subsamples. Robustness is achieved by using a MAC (Message Authentication Code) tag that is calculated on the set of ℓ ciphertexts, and is constructed using an IT-secure one-time MAC algorithm. The MAC must satisfy *key-shift security* and protect against an adversary that can modify both the message and the key of the MAC. We use the MAC in [14] and for completeness prove its security in Appendix B. Theorem 2 proves that the composition of our rFE and the MAC is an sr-rFE. Comparison of our constructions with existing works is in Table I.

¹In [6], *insider security model* allows an adversary to obtain $\tilde{R}^i \leftarrow \text{Rep}(\tilde{P}^i, w + d^i)$, where \tilde{P}^i and d^i are chosen by the adversary.

Communication and computation cost. In Construction 1, the helper data size is $\sim (\ell \cdot (\alpha + 2 - 2\log(\frac{2\ell}{\sigma}) + m\lceil\log(n)\rceil))$ bits for reusable FE, where ℓ is the number of subsamples used in the construction, σ is the advantage of the adversary in the reusability game (Definition 4), and m, α and N , are parameters of (α, m, N) conditional entropy sources (Definition 6).

In Construction 2, the CRS and the helper data sizes are $\sim (\ell m\lceil\log(n)\rceil + m)$ and $\sim [(\ell \cdot (\alpha + 2 - 2\log(\frac{2\ell}{\sigma})) + (\text{length of MAC tag}))]$ respectively.

Both constructions are computationally efficient. Construction 1 requires $\sim \ell$ computations of a universal hash function that is used as a strong average case extractor, and Construction 2 has the same computation with an additional MAC tag computation.

The only other reusable FEs with IT security are two general constructions due to Boyen [6] and the relationship between m, n and t , the min-entropy, sample size and distance bound, needs instantiation of the building blocks. There is no other IT-secure srrFE.

B. Related work

Fuzzy extractors have been extensively studied in information theoretic [6], [8], [15], [16] and computational settings [7], [9]–[11], [17]–[19]. Table I summarizes properties of IT-secure schemes that are directly related to our work.

FE Scheme	Distr	ReUse	QuCor	Rbst	Sec
[2]	minEnt	—	—	—	Std
[6]	minEnt	R2.1	Shift (R1.1)	—	Std
[6]	minEnt	R2.2 ¹	Shift (R1.1)	—	RO
[15]	minEnt	—	—	R2.1	RO
[8], [20]	minEnt	—	—	R2.2	Std
[7, Constr. 3]	lAlph	—	—	—	Std
Construction 1	Strct	R2.2	Arbitrary (R1.2)	—	Std
Construction 2	Strct	R2.2	Arbitrary (R1.2)	R2.2	Std

TABLE I

CONSTRUCTIONS OF INFORMATION THEORETIC FUZZY EXTRACTOR. COLUMNS ARE DEFINED AS: DISTR: REQUIRED SOURCE DISTRIBUTION; OF THE SOURCE IN THE SCHEME AND ITS TYPE; REUSE: REUSABILITY TYPE; QU-COR: QUERY CORRELATION TYPE; RBST: ROBUSTNESS TYPE; SEC: SECURITY MODEL; MIN-ENT: BOUND ON SOURCE MIN-ENTROPY; LALPH: LARGE ALPHABET SOURCE; STRCT: STRUCTURED SOURCE; STD: STANDARD MODEL; RO: RANDOM ORACLE MODEL; “—”: NOT ACHIEVED; CONSTR. 3 DENOTES CONSTRUCTION 3 IN [7].

Canetti et al. [7, Proposition 1] gave the lower-bound $\sim t\log(\frac{n}{t})$ on the required sample entropy of FE when the distance between two samples is bounded by t , when the Rep algorithm receives the correct helper data. To achieve robustness in FE however, the min-entropy of a sample of size n , must be at least $n/2$ [21, Section 5]. The entropy requirement of robust FE is inline with known results for key establishment in P_{XYZ} setting. In [22] it was proved that when Alice and Bob share an n -bit string, key extraction in presence of an active adversary is possible if (Rényi) entropy of the shared string is lower bounded by $2n/3$ bit. This result was later improved to $n/2$ [8], matching robust FE result in [21]. The bounds are for general sources and do not apply to our constructions that are for structured sources.

II. BACKGROUND AND DEFINITIONS

Notations. Upper-case letters (e.g., X) refer to random variables (RVs), and lower-case letters (e.g., x) denote their

realizations. P_X denotes the probability distribution of an RV X . All logarithms are base 2 unless specified. The *min-entropy* of an RV $X \in \mathcal{X}$ with distribution P_X is $H_\infty(X) = -\log(\max_x(P_X(x)))$, and the *average conditional min-entropy* [2] of RV X given RV $Y \in \mathcal{Y}$ is defined as, $\tilde{H}_\infty(X|Y) = -\log \mathbb{E}_{y \leftarrow \mathcal{Y}} \max_{x \in \mathcal{X}} P_{X|Y}(x|y)$. The *statistical distance* between two RVs X and Y with the same domain \mathcal{T} is given by:

$$\Delta(X, Y) = \frac{1}{2} \sum_{v \in \mathcal{T}} |\Pr[X = v] - \Pr[Y = v]|.$$

We use U_ℓ to denote a RV that is uniformly distributed over $\{0, 1\}^\ell$. For an n -bit vector x , we write $(x)_{i..j}$ to denote the subvector starting at the i th bit and ending at the j th bit, inclusively. For a sequence of variables $W = W_1, \dots, W_n$, and an index set $A = \{i_1, \dots, i_t\}, i_j \in [1, \dots, n]$, we use $W[A]$ to denote the subsequence W_{i_1}, \dots, W_{i_t} . For a vector $m = (m_0, \dots, m_{n-1}), m_i$ over some field, let $m(x)$ be the polynomial $\sum_{i=0}^{n-1} m_i x^i$.

Extractors and hash functions. An extractor distills an almost uniform random string from a sample of a random source W that has sufficient entropy, possibly using a truly random seed.

Definition 1 (Strong (average case) randomness extractor [8]). $E : \{0, 1\}^n \times \{0, 1\}^r \rightarrow \{0, 1\}^\lambda$ is an average case $(n, \alpha, \lambda, \epsilon)$ -extractor if for any pair of random variables X, A with X over $\{0, 1\}^n$ and $\tilde{H}_\infty(X|A) \geq \alpha$, we have $\Delta(E(X, R), A, R; U, A, R) \leq \epsilon$, where R and U are uniformly distributed over $\{0, 1\}^r$ and $\{0, 1\}^\lambda$, respectively. An extractor E is linear if $E(X_1 + X_2, R) = E(X_1, R) + E(X_2, R)$, for any $X_1, X_2 \in \{0, 1\}^n$ and $R \in \{0, 1\}^r$.

In above, A is the auxiliary variable, and if it is null, we have a *strong* $(n, \alpha, \lambda, \epsilon)$ -extractor. A universal hash family gives a randomness extractor whose parameters are given by the Leftover Hash Lemma [23].

Definition 2 (Universal hash family). A family of functions $h : \mathcal{X} \times \mathcal{S} \rightarrow \mathcal{Y}$ is called a universal hash family if $\forall x, y \in \mathcal{X}$ and $x \neq y$, we have: $\Pr[h(x, S) = h(y, S)] \leq \frac{1}{|\mathcal{Y}|}$, where the probability is over the uniform choices over \mathcal{S} .

Lemma 1 (Generalized Leftover Hash Lemma [2]). Let $h : \mathcal{X} \times \mathcal{S} \rightarrow \{0, 1\}^\ell$ be a universal hash family. Then for any two random variables $A \in \mathcal{X}$ and $B \in \mathcal{Y}$, applying h on A can extract a uniform random variable with length ℓ satisfying: $\Delta(h(A, S), S, B; U_\ell, S, B) \leq \frac{1}{2} \sqrt{2^{-\tilde{H}_\infty(A|B)} \cdot 2^\ell}$, where S is chosen uniformly from \mathcal{S} . In particular, if h is a universal hash family satisfying $\ell \leq \alpha + 2 - 2\log \frac{1}{\epsilon}$, then h is an $(n, \alpha, \ell, \epsilon)$ -extractor, where A is an n -bit string.

Message Authentication Code (MAC) is a tuple of algorithms (gen, mac, vrfy) where gen generates the key $k \in \mathbf{K}$, mac takes a key $k \in \mathbf{K}$ and a message $m \in \mathbf{M}$, and produces a tag $t \in \mathcal{T}$ that will be appended to the message. vrfy algorithm takes a key $k \in \mathbf{K}$ and pair $(m', t') \in \mathcal{M} \times \mathcal{T}$ and outputs, accept or reject, indicating the pair is valid or invalid under the key.

A MAC algorithm is *correct* if for any $m \in \mathcal{M}$, we have, $\Pr[k \leftarrow \text{gen}(\lambda), \text{vrfy}(k, m, \text{mac}(k, m)) = \text{accept}] = 1$.

A MAC algorithm is one-time secure if the success chance of the adversary in the following two attacks is bounded by δ .

- (i) for any message and tag pair $m' \in \mathcal{M}$ and $t' \in \mathcal{T}$, $\Pr[\text{vrfy}(k, m', t') = \text{accept}] \leq \delta$;
- (ii) for any observed message and tag pair $m \in \mathcal{M}$ and tag pair $t \in \mathcal{T}$, for any $m' \neq m \in \mathcal{M}$ and $t' \in \mathcal{T}$, we have, $\Pr[\text{vrfy}(k, m', t') = \text{accept} \mid m, \text{mac}(k, m) = t] \leq \delta$.

For a more detailed definition see Appendix A.

A. Fuzzy extractors

Fuzzy extractors (information theoretic) were introduced by Dodis et al. [2].

Definition 3 (Fuzzy extractor). *Let \mathcal{W} be a family of probability distributions over \mathcal{M} . An $(\mathcal{M}, \mathcal{W}, \xi, t, \epsilon, \sigma)$ -fuzzy extractor FE is a pair of randomized algorithms (Gen, Rep) as follows.*

- i. *Gen: $\mathcal{M} \rightarrow \{0, 1\}^\xi \times \mathcal{P}$ takes a source sample $w \in \mathcal{M}$, and outputs a key $r \in \{0, 1\}^\xi$ and a public helper string $p \in \mathcal{P}$.*
- ii. *Rep: $\mathcal{M} \times \mathcal{P} \rightarrow \{0, 1\}^\xi$ takes a sample $w' \in \mathcal{M}$ and the helper string $p \in \mathcal{P}$ as input, and outputs a key r .*

A fuzzy extractor must satisfy the following properties.

- 1. ϵ -correctness. *An FE is ϵ -correct if for any w' satisfying $d(w, w') \leq t$ where $d(\cdot)$ is a distance function, and $(r, p) \leftarrow \text{Gen}(w)$, we have $\Pr[\text{Rep}(w', p) = r] \geq 1 - \epsilon$, where the probability is over the randomness of Gen and Rep.*
- 2. σ -security. *For any distribution $W \in \mathcal{W}$, the key R is close to uniform, conditioned on P . That is, for any pair, $(R, P) \leftarrow \text{Gen}(W)$, we have, $\Delta((R, P); (U_\xi, P)) \leq \sigma$.*

Reusability and robustness. The following definition of reusability of FE is from [7]. The experiment on the LHS of Figure 1 describes security of Gen as a game between a challenger and an adversary. The challenger provides η outputs of the Gen algorithm on correlated samples to the adversary, after which the adversary must distinguish between a random string and an output key of Gen that has not been revealed. The experiment on the RHS of Figure 1 is defined similarly with the same information provided to the adversary, whose goal is to modify the helper data on a new sample from the same source without being detected.

$\text{Exp}_{A, \text{rFE}}^{\text{reu-b}}()$ 1. for $i \leftarrow 1$ to η do (i) Sample $w^i \leftarrow W^i$ (ii) $(r^i, p^i) \leftarrow \text{Gen}(w^i)$ end 2. $r_0 \leftarrow r^j$ for given $j \in \{1, \dots, \eta\}$ 3. $r_1 \xleftarrow{\$} \{0, 1\}^\xi$ 4. $b' \leftarrow A(r_b, \{r^i\}_{i=1, \dots, \eta, i \neq j}, \{p^i\}_{i=1}^\eta)$ 5. Return b'	$\text{Exp}_{A, \text{srrFE}}^{\text{rob}}()$ 1. for $i \leftarrow 1$ to $\eta - 1$ do (i) Sample $w^i \leftarrow W^i$ (ii) $(r^i, p^i) \leftarrow \text{Gen}(w^i)$ end 2. Sample $w^\eta \leftarrow W^\eta$ 3. $\tilde{p} \leftarrow A^{\text{Orep}}(\{r^i, p^i\}_{i=1}^{\eta-1})$ 4. If $(\tilde{p} \notin \{p^1, \dots, p^{\eta-1}\})$, Return $(\text{Rep}(w^\eta, \tilde{p}) \neq \perp)$ Else Return 0. $\text{Orep}(\tilde{p}^m)$: query q_d times at most 1. Return $(\text{Rep}(w^\eta, \tilde{p}^m))$
--	---

Fig. 1. Security experiments for reusability (LHS) and robustness (RHS) of rFE and srrFE, respectively.

Definition 4 (Reusable fuzzy extractors [7]). *Let \mathcal{W} be a family of distributions over \mathcal{M} , and $\text{rFE} = (\text{Gen}, \text{Rep})$ denote an $(\mathcal{M}, \mathcal{W}, \xi, t, \epsilon, \sigma)$ -fuzzy extractor as given in Definition 3. The FE is (η, σ_r) -reusable if for any η correlated RVs*

$(W^1, \dots, W^\eta), W^j \in \mathcal{W}, \forall j \in \{1, \dots, \eta\}$, and any computationally unbounded adversary A in the experiment $\text{Exp}_{A, \text{rFE}}^{\text{reu}}$ in Figure 1, the following advantage is bounded by σ_r :

$$\text{Adv}_A(\text{Exp}_{A, \text{rFE}}^{\text{reu}}) = |\Pr[\text{Exp}_{A, \text{rFE}}^{\text{reu-0}}() = 1] - \Pr[\text{Exp}_{A, \text{rFE}}^{\text{reu-1}}() = 1]| \leq \sigma_r$$

We also consider *strongly robust and reusable FE (srrFE for short)* defined as follows.

Definition 5 (Strongly robust of reusable fuzzy extractor). *Consider the setting of Definition 4 and an (η, σ_r) -reusable FE as defined above such that $d(W^i, W^\eta) \leq t, \forall i \in \{1, \dots, \eta - 1\}$. We say the FE is a srrFE, that is (q_d, δ_r) -strongly robust, if the success probability of any computationally unbounded adversary A in the robustness experiment $\text{Exp}_{A, \text{srrFE}}^{\text{rob}}$ defined in the the right side of Figure 1 is bounded by δ_r :*

$$\text{Adv}_A(\text{Exp}_{A, \text{srrFE}}^{\text{rob}}) = \Pr[\text{Exp}_{A, \text{srrFE}}^{\text{rob}}() = 1] \leq \delta_r$$

The term “strong” refers to arbitrary correlated queries (random variables) that can be chosen by the adversary.

III. CONSTRUCTION 1 & 2: IT-SECURE FUZZY EXTRACTOR FOR STRUCTURED SOURCES

In this section we present the construction of an rFE for a structured source, and then extend it to an srrFE by using a MAC. The constructions are for (α, m, N) -sources that are defined below.

Definition 6 $((\alpha, m, N)$ -source). *Consider a source $W = W_1, \dots, W_n$ that consists of strings of length n over an alphabet \mathcal{Z} . For parameters α, m and N , we say W is an (α, m, N) -source if for any two random subsets $A, B \subseteq [1, \dots, n]$, with cardinality m and N , respectively, we have $\bar{H}_\infty(W[A] \mid W[B], A, B) \geq \alpha$, where the probability is over the randomness of W and index sets A, B .*

Intuitively the requirement is that entropy of a random subsample of size m is high, when any substring of length N of the sample is seen. The α -entropy k -samples sources defined in [7], are less restrictive class of (α, k, N) -sources when $N = 0$. Our constructions are for binary alphabets, $\mathcal{Z} = \{0, 1\}$.

Construction 1. (rFE) *Let E be an average $(m, \alpha, \nu, \epsilon)$ -extractor, and $W = W_1, W_2, \dots, W_n$ be an (α, m, N) -source with W_i over alphabet $\{0, 1\}$. The Gen and Rep algorithms in Figure 2 describe the fuzzy extractor generation Gen and reproduction procedures Rep, respectively, for the source.*

$\text{Gen}(W)$: Input W Output $R, (p_1 A_1, \dots, p_\ell A_\ell)$ 1. $R \xleftarrow{\$} \{0, 1\}^\xi$ 2. for $i \leftarrow 1$ to ℓ do (i) Sample $A_i \xleftarrow{\$} [n]$ (ii) $d_i = E(W[A_i], Z)$ (iii) Set $p_i = (0^t R) \oplus d_i$ for $t = \nu - \xi$ end 3. Output key R and $(p_1 A_1, \dots, p_\ell A_\ell)$	$\text{Rep}(W', (p_1 A_1, \dots, p_\ell A_\ell))$ Input W' and $(p_1 A_1, \dots, p_\ell A_\ell)$ Output R or \perp 1. for $i \leftarrow 1$ to ℓ do (i) $d_i = E(W'[A_i], Z)$ (ii) if $((d_i \oplus p_i)_{1 \dots t} = 0^t)$ then Output $R = (d_i \oplus p_i)_{t+1 \dots \nu}$ end end 2. Output \perp
---	---

Fig. 2. Construction 1. $\ell, t, \lambda, \xi, n, m, L$ are public parameters. The randomness Z is shared through an authenticated channel. $(p)_i \dots_j$ denotes the substring starting at bit i and ending at bit j of p . In line (i) of $\text{Gen}(W)$, $A_i \xleftarrow{\$} [n]$ denotes choosing $A_i = \{i_1, \dots, i_m\}, i_j \xleftarrow{\$} [n], \forall j \in [1, m]$.

The construction is inspired by the *sample-then-lock* approach of Canetti et al. [7], outlined in section I.

Theorem 1 (Reusable fuzzy extractor). *In Gen algorithm in Figure 2, let E be instantiated by H , a universal hash family. Let ξ denote the length of the extracted key. For a chosen value ℓ , and ϵ', σ that satisfy $\xi \leq \alpha + 2 - 2 \cdot \log(\frac{2\ell}{\sigma}) - t$, the (Gen, Rep) procedures in Figure 2 correspond to an (η, σ) -reusable $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where $(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \leq \epsilon'$ and $\ell \eta m < N$.*

Proof. The following is a proof outline. The complete proof is in Appendix C.

Correctness. We show that Rep algorithm fails with probability at most $(1 - \epsilon')$. The Rep algorithm fails in two cases. First, none of the ℓ subsamples of length m in W' matches the corresponding subsample of W . We derive expressions that bounds and shows how to choose ℓ to have at least one matched subsample of length m in w and w' with probability at least $(1 - \epsilon')$.

Second, there is a match in step (ii) of Rep because of collision in the universal hashing. More specifically, the hash value of a subsample in W is equal to the hash value of the corresponding subsample in W' in the first t bits (the rest is padded with random key).

This collision in step (ii) of Rep in figure 2, occurs with probability $(\frac{1}{2^t})$ when E is a randomly chosen from a universal hash family. In this case Rep will output a key $R' \neq R$ because Rep algorithm ends as soon as the first decryption succeeds.

Reusability. We first prove for $\eta = 1$, and then extend it to $\eta > 1$. $\eta = 1$. We need to prove that $\Delta((R, P), (U_\xi; P)) \leq \sigma$, where P is the public strings.

In step (i) of $Gen()$ algorithm in figure 2, A_i is randomly sampled, and in step (ii), E is implemented by H .

Since W is a (α, m, N) -source, we have $\tilde{H}_\infty(W[A] \mid W[B], A, B) \geq \alpha$, where A is a random subset of $[n]$, and $B \subset [n]$ of size N and disjoint from A . Since H is universal hash family with output length ν , from lemma 1, H is an $(m, \alpha, \nu, \frac{\sigma}{2\ell})$ -extractor as long as $\nu \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma})$. Since $\nu = \xi + t$, we obtain an upper bound on ξ for H to be an $(m, \alpha, \nu, \frac{\sigma}{2\ell})$ -extractor, and we have $\Delta(R, \mathbf{p}, Z, \mathbf{A}; U, \mathbf{p}, Z, \mathbf{A}) \leq \sigma$.

Therefore, (Gen, Rep) is an srrFE with $(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \leq \epsilon'$, $\ell m < N$ and $\mathcal{V} \in \{0, 1\}$ and the extracted key length $\xi \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma}) - t$.

Case $\eta > 1$. Similar to the case $\eta = 1$ and taking into account property of (α, m, N) -source that ensures the entropy of the new samples remain the same. \square

1) *A strongly robust and reusable FE:* Construction 2 is an srrFE and is in CRS model which assumes that sender and receiver share a public random string that is independent of the source, and is used to specify A_1, \dots, A_ℓ and Z . Robustness is obtained by using an information theoretic MAC with a special property, together with Construction 1. This is the first IT-secure srrFE without assuming random oracle, and is for structured sources.

Construction 2. Consider the same source as Construction 1, and E be an average $(m, \alpha, \nu, \epsilon)$ -extractor. Figure 3 describes the Gen and Rep algorithms of our srrFE.

<p><i>Gen</i>(W)</p> <p>Input W</p> <p>Output $R, (p_1, \dots, p_\ell, T)$</p> <ol style="list-style-type: none"> 1. $R \xleftarrow{\\$} \{0, 1\}^\xi, R_1 \xleftarrow{\\$} \{0, 1\}^{2\lambda}$ 2. for $i \leftarrow 1$ to ℓ do <ol style="list-style-type: none"> (i) Sample a random subset $A_i = \{i_1, \dots, i_m\}$ from $[n]$ (ii) $d_i = E(W[A_i], Z)$ (iii) Set $p_i = ((0^t \parallel R_1) \oplus d_i)$ for $t = \nu - \xi - 2\lambda$ end 4. Let $L = \lceil \ell \nu / \lambda \rceil + 4$, and $p = (p_1, \dots, p_\ell)$ 5. $T = Eval(p, R_1, L)$ 6. Output key R and ciphertext (p_1, \dots, p_ℓ, T) 	<p><i>Rep</i>($W', (p_1, \dots, p_\ell, T)$)</p> <p>Input W' and (p_1, \dots, p_ℓ, T)</p> <p>Output R or \perp</p> <ol style="list-style-type: none"> 1. for $i \leftarrow 1$ to ℓ do <ol style="list-style-type: none"> (i) $d_i = E(W'[A_i], Z)$ (ii) if $((d_i \oplus p_i)_{1..t} = 0^t)$ then <ol style="list-style-type: none"> (a) Set $\rho = (d_i \oplus p_i)_{t+1.. \nu}$ (b) Set $R = (\rho)_{t+1.. t+\xi}$, $R_1 = (\rho)_{\nu-2\lambda+1.. \nu}$ (c) $T' = Eval((p_1, \dots, p_\ell), R_1, L)$ (d) if $T' = T$, output key R; otherwise, continue end 2. Output \perp
--	---

Fig. 3. srrFE Gen and Rep algorithms. $\ell, t, \lambda, \xi, n, m, L$ are system public parameters. E is an average $(m, \alpha, \nu, \epsilon)$ -extractor. The subsets A_i and Z are obtained from CRS. $Eval(\cdot)$ is defined in Algorithm 1.

Algorithm 1: $T \leftarrow Eval(p, R_1, L)$

1. Encode p to vector \mathbf{m} of length $L - 4$ in $GF(2^\lambda)$
2. Parse $R_1 = x \parallel y$ for $x, y \in \{0, 1\}^\lambda$
3. Compute $T = x^L + x^2 \mathbf{m}(x) + xy$ for $\mathbf{m}(x) = \sum_{i=0}^{L-5} m_i x^i$.
4. Return T

Providing robustness. To provide robustness for the rFE, we use a part of the extracted key to compute an authentication tag using a one-time IT-secure MAC, and append it to $P = p \parallel tag$. We note that if an adversary modifies p to \hat{p} , because of the linearity of “one-time-pad” the key $(R \parallel R_1)$ will be shifted by a value $\delta = p + \hat{p}$ that is known to the adversary. We use a MAC construction that provides security against a known key shift.

For key (x, y) , the tag function is, $T(x, y, \mathbf{m}) = x^L + x^2 \mathbf{m}(x) + xy$, where \mathbf{m} is a vector over $GF(2^\lambda)$ of length at most $L - 5$ (so $\mathbf{m}(t)$ is a polynomial of degree at most $L - 5$; see notations in Section II). The verification algorithm for (m', t') is by computing the tag function for m' , and comparing the result with t' .

In Appendix B, we prove that the MAC provides one-time security.

Theorem 2 (Robust and reusable FE). *Let \mathcal{W} be a family of (α, m, N) -sources and E be an average $(m, \alpha, \nu, \epsilon)$ -randomness linear extractor for source W . Let E be implemented by H , a universal hash family. Fix ℓ and let ξ be the length of the extracted key. If adversary makes at most q_e generation queries and q_d reproduction queries, then for any $\delta, \epsilon', \sigma$ satisfying $\xi \leq \alpha + 2 - 2 \cdot \log(\frac{4\ell}{\sigma}) - t - 2\lambda$, (Gen, Rep) described in Construction 2 is a (q_d, δ) -strongly robust, $(q_e + 1, \sigma)$ -reusable $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where $(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \cdot L \cdot 2^{-\lambda} \leq \epsilon'$, $(q_e + 1)\ell m < N$, $\delta = (q_d + q_e)\ell \epsilon + q_d 2^{-\lambda} \ell (L + 1)$, $(q_e + q_d)\ell m < N$ and $L = \lceil \ell \nu / \lambda \rceil + 4$.*

The proof of this theorem is in Appendix D.

IV. CONCLUDING REMARKS

We proposed an rFE and an srrFE, both with information theoretic security for a structured source. Both FEs provide

security for strong notion of reusability. The srrFE is the only known strongly robust and reusable IT-secure FE that uses CRS model. Extending our FEs to more general sources are interesting open questions.

REFERENCES

- [1] U. Maurer, “Secret Key Agreement by Public Discussion from Common Information,” *IEEE Trans. Inf. Theory*, vol. 39, no. 3, pp. 733–742, may 1993. [Online]. Available: <https://ieeexplore.ieee.org/document/256484/>
- [2] Dodis, Ostrovsky, Reyzin, and Smith, “Fuzzy extractors: How to generate strong keys from biometrics and other noisy data,” *SIAM J. Comput.*, vol. 38, no. 1, pp. 97–139, 2008. [Online]. Available: <https://doi.org/10.1137/060651380>
- [3] Daugman, “How iris recognition works,” *IEEE Trans. Circuits Syst. Video Technol.*, vol. 14, no. 1, pp. 21–30, 2004. [Online]. Available: <https://doi.org/10.1109/TCSVT.2003.818350>
- [4] Karakaya, Alptekin, and İncel, “Using behavioral biometric sensors of mobile phones for user authentication,” *Procedia Computer Science*, vol. 159, pp. 475–484, 2019.
- [5] M. M. Islam, R. Safavi-Naini, and M. Kneppers, “Scalable behavioral authentication,” *IEEE Access*, vol. 9, pp. 43 458–43 473, 2021.
- [6] Boyen, “Reusable cryptographic fuzzy extractors,” in *Proceedings of the 11th ACM Conf. on Computer and communications security*, 2004, pp. 82–91.
- [7] Canetti, Fuller, Paneth, Reyzin, and Smith, “Reusable fuzzy extractors for low-entropy distributions,” *Cryptol. ePrint Archive*, Report 2014/243, 2014, <https://ia.cr/2014/243>.
- [8] Dodis, Kanukurthi, Katz, Reyzin, and D. Smith, “Robust fuzzy extractors and authenticated key agreement from close secrets,” *IEEE Trans. Inf. Theory*, vol. 58, no. 9, pp. 6207–6222, 2012. [Online]. Available: <https://doi.org/10.1109/TIT.2012.2200290>
- [9] Wen and Liu, “Robustly reusable fuzzy extractor from standard assumptions,” in *ASIACRYPT 2018*, ser. LNCS, vol. 11274. Springer, pp. 459–489. [Online]. Available: https://doi.org/10.1007/978-3-030-03332-3_17
- [10] Wen, Liu, and Han, “Reusable fuzzy extractor from the decisional diffie-hellman assumption,” *Des. Codes Cryptogr.*, vol. 86, no. 11, pp. 2495–2512, 2018. [Online]. Available: <https://doi.org/10.1007/s10623-018-0459-4>
- [11] Wen, Liu, and Gu, “Generic constructions of robustly reusable fuzzy extractor,” in *PKC 2019*. Springer International Publishing, 2019, pp. 349–378.
- [12] Simhadri, Steel, and Fuller, “Cryptographic authentication from the iris,” in *ISC 22, 2019*, vol. 11723, 2019, pp. 465–485. [Online]. Available: https://doi.org/10.1007/978-3-030-30215-3_23
- [13] N. Cui, S. Liu, D. Gu, and J. Weng, “Robustly reusable fuzzy extractor with imperfect randomness,” *Des. Codes Cryptogr.*, vol. 89, no. 5, pp. 1017–1059, 2021. [Online]. Available: <https://doi.org/10.1007/s10623-021-00843-1>
- [14] S. Panja, N. Tripathi, S. Jiang, and R. Safavi-Naini, “Robust and reusable fuzzy extractors and their application to authentication from iris data,” *Cryptology ePrint Archive*, Paper 2023/284, 2023, <https://eprint.iacr.org/2023/284>. [Online]. Available: <https://eprint.iacr.org/2023/284>
- [15] Boyen, Dodis, Katz, Ostrovsky, and Smith, “Secure remote authentication using biometric data,” in *Proc. EUROCRYPT 2005*. Springer, 2005, pp. 147–163.
- [16] B. Fuller, L. Reyzin, and A. Smith, “When are fuzzy extractors possible?” *IEEE Transactions on Information Theory*, vol. 66, no. 8, pp. 5282–5298, 2020.
- [17] Apon, Cho, Eldefrawy, and Katz, “Efficient, reusable fuzzy extractors from LWE,” in *CSCML 2017, Proc.*, ser. LNCS, vol. 10332. Springer, 2017, pp. 1–18. [Online]. Available: https://doi.org/10.1007/978-3-319-60080-2_1
- [18] Feng and Tang, “Computational robust (fuzzy) extractors for crs-dependent sources with minimal min-entropy,” in *Theory of Cryptogr. Conf.* Springer, 2021, pp. 689–717.
- [19] D. Apon, C. Cachet, B. Fuller, P. Hall, and F.-H. Liu, “Nonmalleable digital lockers and robust fuzzy extractors in the plain model,” in *Advances in Cryptology – ASIACRYPT 2022*, S. Agrawal and D. Lin, Eds. Cham: Springer Nature Switzerland, 2022, pp. 353–383.
- [20] Cramer, Dodis, Fehr, Padró, and Wichs, “Detection of algebraic manipulation with applications to robust secret sharing and fuzzy extractors,” in *Advances in Cryptol. - EUROCRYPT 2008*, ser. LNCS, vol. 4965. Springer, 2008, pp. 471–488. [Online]. Available: https://doi.org/10.1007/978-3-540-78967-3_27
- [21] Dodis and Wichs, “Non-malleable extractors and symmetric key cryptography from weak secrets,” in *ACM Symp. on Theory of Computing*, 2009, pp. 601–610.
- [22] U. M. Maurer and S. Wolf, “Secret-key agreement over unauthenticated public channels III: privacy amplification,” *IEEE Trans. Inf. Theory*, vol. 49, no. 4, pp. 839–851, 2003. [Online]. Available: <https://doi.org/10.1109/TIT.2003.809559>
- [23] Impagliazzo, Levin, and Luby, “Pseudo-Random Generation from One-Way Functions,” in *STOC ’89*. ACM Press, 1989, pp. 12–24. [Online]. Available: <http://portal.acm.org/citation.cfm?doid=73007.73009>

APPENDIX

A. Message Authentication Code

Definition 7 (one-time MAC). An $(\mathcal{M}, \mathcal{K}, \mathcal{T}, \delta)$ -one-time MAC is a triple of polynomial-time algorithms $(\text{gen}, \text{mac}, \text{vrfy})$ where $\text{gen}(\lambda) : 1^\lambda \rightarrow \mathcal{K}$ gives a key $k \in \mathcal{K}$ on input security parameter λ , $\text{mac} : \mathcal{K} \times \mathcal{M} \rightarrow \mathcal{T}$ takes the key k and a message $m \in \mathcal{M}$ as input and outputs a tag $t \in \mathcal{T}$, $\text{vrfy} : \mathcal{K} \times \mathcal{M} \times \mathcal{T} \rightarrow \{\text{accept}, \text{reject}\}$ outputs either accept or reject on input: the key k , a message $m \in \mathcal{M}$ and a tag $t \in \mathcal{T}$.

The correctness property requires that: for any choice of $m \in \mathcal{M}$, we have

$$\Pr[k \leftarrow \text{gen}(\lambda), \text{vrfy}(k, m, \text{mac}(k, m)) = \text{accept}] = 1 \quad (1)$$

The unforgeability property requires that for any $k \leftarrow \text{gen}(\lambda)$, the following two conditions are satisfied:

(i) for any message and tag pair $m' \in \mathcal{M}$ and $t' \in \mathcal{T}$,

$$\Pr[\text{vrfy}(k, m', t') = \text{accept}] \leq \delta, \quad (2)$$

(ii) for any observed message and tag pair $m \in \mathcal{M}$ and tag pair $t \in \mathcal{T}$, for any adversary’s choice of $m' \neq m \in \mathcal{M}$ and $t' \in \mathcal{T}$,

$$\Pr[\text{vrfy}(k, m', t') = \text{accept} \mid m, \text{mac}(k, m) = t] \leq \delta, \quad (3)$$

B. Security proof of the MAC

The following lemma shows that the tag function has one-time authentication property.

Lemma 2. Let $L = 3 \bmod 4$ and m be an arbitrary but given vector of length at most $L - 5$ over $GF(2^\lambda)$. Let x, y be uniformly random over $GF(2^\lambda)$. Then, given $T = x^L + x^2m(x) + xy$, the following holds

$$(x + \delta_1)^L + (x + \delta_1)^2m'(x + \delta_1) + (x + \delta_1)(y + \delta_2) = T' \quad (4)$$

with probability at most $L2^{-\lambda}$, where $T', \delta_1, \delta_2 \in GF(2^\lambda)$ and m' a vector over $GF(2^\lambda)$ of length at most $L - 5$ with $m' \neq m$, are arbitrary but all deterministic in T and the probability is over the choices of (x, y) .

Proof. We write (m', T') valid to indicate the event that Eq. (4) is satisfied. Then, given T , the probability that Eq. (4) holds, is

$$\begin{aligned} & \mathbb{E}_T \left(P_{xy}[(m', T') \text{ valid} \mid T] \right) \\ & \leq \sum_{a \in GF(2^\lambda)} P_{xy}[(m', T') \text{ valid}, T = a] \\ & \leq \sum_a P_{xy}[(m', T') \text{ valid}, T = a, x = 0] \end{aligned}$$

$$\begin{aligned}
& + \sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0] \\
& \leq 2^{-\lambda} + \sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0] \quad (5)
\end{aligned}$$

Next, we bound $\sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0]$. To bound this, we study two cases: case $\delta_1 = 0$ and case $\delta_1 \neq 0$. In the following, we use the fact that $T', m', \delta_1, \delta_2$ are determined by T . Therefore, given $T = a$, $(T', m', \delta_1, \delta_2)$ are all fixed.

Case $\delta_1 = 0$. In this case, since $m' \neq m$, $T' - T = x^2(m'(x) - m(x)) + x\delta_2$ is a non-zero polynomial of degree at most $L - 3$ (when fix $T = a$). Hence, given T, T' , there are at most $L - 3$ possible x that satisfy this. Moreover, for any $a \in GF(2^\lambda)$ and non-zero x , there exists a unique y such that (x, y) results in $T = a$. As a result, given $T = a \wedge x \neq 0$, x is uniformly random over $GF(2^\lambda) - \{0\}$. Keeping these facts in mind, we obtain

$$\begin{aligned}
& P_{xy}[(m', T') \text{ valid} \mid x \neq 0, T = a, \delta_1 = 0] \cdot \Pr(x \neq 0, T = a, \delta_1 = 0) \\
& \leq P_{xy}[(x^2(m'(x) - m(x)) + x\delta_2 = T' - a) \mid x \neq 0, T = a, \delta_1 = 0] \cdot \\
& \quad \Pr(x \neq 0, T = a, \delta_1 = 0) \\
& \leq P_{xy}[(x^2(m'(x) - m(x)) + x\delta_2 = T' - a) \mid x \neq 0, T = a] \cdot \\
& \quad \Pr(x \neq 0, T = a, \delta_1 = 0) \quad (6) \\
& \leq \frac{L-3}{2^\lambda-1} \Pr(x \neq 0, T = a, \delta_1 = 0),
\end{aligned}$$

where Eq. (6) follows from the fact that δ_1 is determined by T . Hence,

$$\begin{aligned}
& \sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0, \delta_1 = 0] \\
& \leq \frac{L-3}{2^\lambda-1} \Pr(x \neq 0, \delta_1 = 0). \quad (7)
\end{aligned}$$

Case $\delta_1 \neq 0$. In this case, $T' - T = \delta_1 x^{L-1} + \delta_1^2 x^{L-2} + Q(x) + \delta_1 y$, where $Q(x)$ is some polynomial of degree at most $L - 3$ (when fix $T = a$). Here we use the fact: since $GF(2^\lambda)$ has character is 2 and $L = 3 \bmod 4$, it follows that both L and $(L-1)L/2$ are 1 in $GF(2^\lambda)$. Representing y in terms of x and substituting it into T , we have $a = T = \delta_1 x^{L-1} + \mu(x)$ for some polynomial $\mu(x)$ of degree at most $L - 3$ (when fix $T = a$). There are at most $L - 1$ possible x to satisfy this. Further, when $T = a$ and x are fixed with $x \neq 0$, there is a unique y satisfying $T = a$. Hence, given $T = a$ and the fact $x \neq 0$, we know that x is uniformly random over $GF(2^\lambda) - \{0\}$. Finally, we again remind that $T', m', \delta_1, \delta_2$ are determined by T (hence, given $T = a$, $(T', m', \delta_1, \delta_2)$ are all fixed). With these facts in mind, we have (similar to Case $\delta_1 = 0$)

$$\begin{aligned}
& P_{xy}[(m', T') \text{ valid} \mid x \neq 0, T = a, \delta_1 \neq 0] \cdot \Pr(x \neq 0, T = a, \delta_1 \neq 0) \\
& \leq P_{xy}[\delta_1 x^{L-1} + \delta_1^2 x^{L-2} + Q(x) + \delta_1 y = T' - a \mid x \neq 0, T = a] \cdot \\
& \quad \Pr(x \neq 0, T = a, \delta_1 \neq 0) \quad (8) \\
& \leq \frac{L-1}{2^\lambda-1} \Pr(x \neq 0, T = a, \delta_1 \neq 0),
\end{aligned}$$

Hence,

$$\begin{aligned}
& \sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0, \delta_1 \neq 0] \\
& \leq \frac{L-1}{2^\lambda-1} \Pr(x \neq 0, \delta_1 \neq 0). \quad (9)
\end{aligned}$$

Combining Eq. (7)(9), we have $\sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0] \leq \frac{L-1}{2^\lambda-1} \Pr(x \neq 0)$. Notice $\Pr(x \neq 0) = \frac{2^\lambda-1}{2^\lambda}$.

We know that $\sum_a P_{xy}[(m', T') \text{ valid}, T = a, x \neq 0] \leq \frac{L-1}{2^\lambda}$. Plugging in Eq. (5), we obtain our result. \square

C. Proof of Theorem 1

Let us start the security analysis with some preparation results. Claim 1 and Lemmas 3-4 are based on quite standard techniques of probabilistic distances. We give proofs in Appendix F for completeness.

The following claim is a well-known fact.

Claim 1. Let X and Y be random variables over \mathcal{Z} . Assume that $F : \mathcal{Z} \rightarrow \mathcal{V}$ is a deterministic function. Then $\Delta(F(X); F(Y)) \leq \Delta(X; Y)$.

This claim is correct if F is randomized as it holds for each fixed randomness. The following lemma can be proven by triangle inequality and induction on μ .

Lemma 3. Let W be a (α, m, N) -source of length n over $\{0, 1\}$. Let $E : \{0, 1\}^m \times \{0, 1\}^r \rightarrow \{0, 1\}^\nu$ be an average $(m, \alpha, \nu, \epsilon)$ -randomness extractor. Let Z be a uniform r -bit string and A_i be uniformly random subset of $[n]$ of size m for $i = 1, \dots, \mu$. Let $d_i = E(W[A_i], Z)$ for $i = 1, \dots, \mu$. Assume $E(\tilde{U}, Z) = U$, where \tilde{U} is uniformly random over $\{0, 1\}^m$ and U is the uniformly distributed over $\{0, 1\}^\nu$. If $\mu m < N$, then, $\Delta(\mathbf{d}, Z, \mathbf{A}; U^\mu, Z, \mathbf{A}) \leq \mu\epsilon$, where $\mathbf{A} = (A_1, \dots, A_\mu)$ and $\mathbf{d} = (d_1, \dots, d_\mu)$.

Lemma 4. Let $W = W_1, \dots, W_n$ be an (α, m, N) -source of length n over alphabet $\{0, 1\}$. Let $E : \{0, 1\}^m \times \{0, 1\}^r \rightarrow \{0, 1\}^\nu$ be an average $(m, \alpha, \nu, \epsilon)$ -randomness extractor. Let A_i be uniformly random subset of $[n]$ of size m for $i = 1, \dots, \ell$ and Z is a uniform r -bit string. Let $p_i = E(W[A_i], Z) \oplus 0^t | S$ for $S \leftarrow \{0, 1\}^{\nu-t}$, $i = 1, \dots, \ell$. Then, $\Delta(S, \mathbf{p}, Z, \mathbf{A}; U, \mathbf{p}, Z, \mathbf{A}) \leq 2\ell\epsilon$, where $\mathbf{p} = (p_1, p_2, \dots, p_\ell)$, $\mathbf{A} = (A_1, \dots, A_\ell)$, $\ell m < N$ and $U \leftarrow \{0, 1\}^{\nu-t}$.

We now prove the construction 1 is a reusable fuzzy extractor satisfying definition 4.

To prove that the construction is a reusable FE, we need to prove the ϵ' -correctness according to Definition 3 and then reusability satisfying Definition 4.

Correctness. We first consider correctness error. That is, when there is no attack, the ciphertext will be accepted with high probability. Note that the maximum Hamming distance between W and W' is t' i.e. $d(W, W') \leq t'$. Observe that for any i ,

$$\begin{aligned}
& \Pr[(W'_{j_{i,1}}, W'_{j_{i,2}}, \dots, W'_{j_{i,m}}) = (W_{j_{i,1}}, W_{j_{i,2}}, \dots, W_{j_{i,m}})] \\
& \geq (1 - t'/(n - m))^m, \text{ where } A_i = \{i_1, \dots, i_m\} = \{j_{i,1}, j_{i,2}, \dots, j_{i,m}\} \text{ and } 1 \leq j_{i,1}, j_{i,2}, \dots, j_{i,m} \leq n. \text{ This} \\
& \text{holds true since } \Pr[W'_{j_{i,1}} = W_{j_{i,1}}] \geq (1 - t'/n) \text{ as } j_{i,1} \text{ is uniform. Next, given } W'_{j_{i,1}} = W_{j_{i,1}}, \text{ the probability that} \\
& W'_{j_{i,2}} = W_{j_{i,2}} \text{ is at least } 1 - t'/(n - 1). \text{ We thus have} \\
& \Pr[(W'_{j_{i,1}}, W'_{j_{i,2}}, \dots, W'_{j_{i,m}}) = (W_{j_{i,1}}, W_{j_{i,2}}, \dots, W_{j_{i,m}})] \\
& \geq (1 - t'/n)(1 - t'/(n - 1)) \dots (1 - t'/(n - m)) \\
& \geq (1 - t'/(n - m))^m. \text{ Consequently, the probability that none} \\
& \text{of the } v_i\text{'s matches at the receiver is at most } (1 - (1 - \frac{t'}{n-m})^m)^\ell, \\
& \text{where } v_i = (W'_{j_{i,1}}, W'_{j_{i,2}}, \dots, W'_{j_{i,m}}), \text{ and } i \in \{1, 2, \dots, \ell\}.
\end{aligned}$$

In addition, Rep in figure 2 may return an incorrect extracted key due to an error in step (ii). This error might occur due to a collision that we now explain in detail. A collision at step (ii) may occur with probability $(\frac{1}{2^t})$, assuming E is implemented as a function from a universal hash family. Moreover, Rep may return an incorrect extracted key if there is at least one collision at step (ii). This may happen with any of the ℓ executions of step (ii) and hence with probability at most $\ell \cdot 2^{-t}$.

Since the fuzzy extractor's allowable error parameter is ϵ' , we need to choose ℓ so that

$$(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \leq \epsilon'. \quad (10)$$

Reusability. We first prove the case when $\eta = 1$, and then extend it to the case when $\eta > 1$.

Case $\eta = 1$. We need to prove that $\Delta((R, P), (U_\xi; P)) \leq \sigma$, where P is the public strings.

In step (i) of $Gen()$ algorithm described in figure 2, we sample a random subset $A_i = \{i_1, \dots, i_m\}$ from $[n]$. In step (ii), E is implemented by H .

Since W is a (α, m, N) -sample source, we have $\tilde{H}_\infty(W[A] \mid W[B], A, B) \geq \alpha$, where A (resp. B) is a purely random subset of $[n]$ of size m (resp. N).

Since $H : \mathcal{X} \times \mathcal{S} \rightarrow \{0, 1\}^\nu$ is a universal hash family, from lemma 1, if $\nu \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma})$, H is an $(m, \alpha, \nu, \frac{\sigma}{2\ell})$ -extractor. Now, $\nu = \xi + t$. Thus, if $\xi \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma}) - t$, H is an $(m, \alpha, \nu, \frac{\sigma}{2\ell})$ -extractor.

Since H is an $(m, \alpha, \nu, \frac{\sigma}{2\ell})$ -extractor, from lemma 3, 4, if $\xi \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma}) - t$ and $\ell m < N$, considering $S = R$ in lemma 4, we have

$$\Delta(R, \mathbf{p}, Z, \mathbf{A}; U, \mathbf{p}, Z, \mathbf{A}) \leq \sigma. \quad (11)$$

Therefore, (Gen, Rep) is a $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where $(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \leq \epsilon'$, $\ell m < N$ and $\mathcal{V} \in \{0, 1\}$. Furthermore, the length of the extracted key will be $\xi \leq \alpha + 2 - 2 \log(\frac{2\ell}{\sigma}) - t$.

Case $\eta > 1$. In response to a query to Gen oracle (i.e. generation oracle query), the oracle returns a pair of key r^i and ciphertext c^i to the adversary, where $r^i = R^i$ and $c^i = (p_1|A_1, \dots, p_\ell|A_\ell)^i$ according to the $Gen(W^i)$ procedure described in figure 2. Now since W is a source with (α, m, N) -samples, in each query to generation oracle, $Gen(W^i)$ procedure runs with new samples with conditional entropy α . Hence, the uncertainty about the new samples remains the same before and after η queries to the generation oracle from adversary's perspective. Therefore, the entropy of the new samples remains same. Now proceeding in similar manner as the proof for the **case** $\eta = 1$, we can prove that, if $\xi \leq \alpha + 2 - 2 \cdot \log(\frac{2\ell}{\sigma}) - t$, then the (Gen, Rep) described in figure 2 is (η, σ) -reusable $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where

$$(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \leq \epsilon' \text{ and } \ell \eta m < N. \quad \square$$

D. Proof of Theorem 2

Lemma 5 is based on quite standard techniques of probabilistic distances. We give its proof in Appendix F for completeness.

Lemma 5. $\Delta(R, \mathbf{p}, Z, \mathbf{A}, T; U, \mathbf{p}, Z, \mathbf{A}, T) \leq 4\ell\epsilon$.

We now prove the construction 2 is a strongly robust and reusable fuzzy extractor satisfying definition 5.

We need to prove the ϵ' -correctness according to Definition 3 and then reusability satisfying Definition 4 and finally prove robustness.

Correctness. We first consider correctness error. Proceeding in the same way as the proof of Theorem 1, we can prove that the probability that no v_i matches at the receiver is at most $(1 - (1 - \frac{t'}{n-m})^m)^\ell$, where $v_i = (W'_{j_{i,1}}, W'_{j_{i,2}}, \dots, W'_{j_{i,m}})$, and $i \in \{1, 2, \dots, \ell\}$.

In addition, Rep may be incorrect due to an error in step (ii) and verification of $T' = T$. These errors might occur due to collision. A collision at step (ii) might occur with probability $(\frac{1}{2^t})$, assuming E is implemented as a function from a universal hash family. In addition, similar to lemma 2 (except $\delta_1|\delta_2 = (d_i \oplus d'_i)_{\nu-2\lambda+1 \dots \nu}$ with d_i from W and d'_i from W'), a collision $T' = T$ occurs with probability $L2^{-\lambda}$. Now, Rep may be incorrect if there is at least one collision at step (ii) together with a collision $T' = T$. This may happen with any of the ℓ iterations and hence with probability at most $\ell \cdot 2^{-t} \cdot L \cdot 2^{-\lambda}$.

Since the fuzzy extractor's allowable error parameter is ϵ' , we need to choose ℓ so that

$$(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \cdot L \cdot 2^{-\lambda} \leq \epsilon'. \quad (12)$$

Reusability. Let $\eta = q_e + 1$. We first prove the case when $\eta = 1$, and then extend it to the case when $\eta > 1$.

Case $\eta = 1$. We need to show that $\Delta((R, P), (U_\xi; P)) \leq \sigma$, where P is the public strings. In step (i) of Gen algorithm of Figure 3, a random subset $A_i = \{i_1, \dots, i_m\}$ is sampled from $[n]$, and in step (ii), E is implemented by H . Note that W is a (α, m, N) -sample source. Hence, we have $\tilde{H}_\infty(W[A] \mid W[B], A, B) \geq \alpha$, where A (resp. B) is a purely random subset of $[n]$ of size m (resp. N).

Since $H : \mathcal{X} \times \mathcal{S} \rightarrow \{0, 1\}^\nu$ is a universal hash family, from lemma 1, if $\nu \leq \alpha + 2 - 2 \log(\frac{4\ell}{\sigma})$, H is an $(m, \alpha, \nu, \frac{\sigma}{4\ell})$ -extractor. Now, $\nu = 2\lambda + \xi + t$. Thus, if $\xi \leq \alpha + 2 - 2 \log(\frac{4\ell}{\sigma}) - t - 2\lambda$, H is an $(m, \alpha, \nu, \frac{\sigma}{4\ell})$ -extractor.

Since H is an $(m, \alpha, \nu, \frac{\sigma}{4\ell})$ -extractor, from lemma 3, 4 and 5, if $\xi \leq \alpha + 2 - 2 \log(\frac{4\ell}{\sigma}) - t - 2\lambda$ and $\ell m < N$, we have

$$\Delta(R, \mathbf{p}, Z, \mathbf{A}, T; U, \mathbf{p}, Z, \mathbf{A}, T) \leq \sigma. \quad (13)$$

Therefore, (Gen, Rep) is a $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where

$$(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \cdot L \cdot 2^{-\lambda} \leq \epsilon', \ell m < N \text{ and } \mathcal{V} \in \{0, 1\}. \text{ Furthermore, the length of the extracted key will be } \xi \leq \alpha + 2 - 2 \log(\frac{4\ell}{\sigma}) - t - 2\lambda.$$

Case $\eta > 1$. The proof follows similar arguments of *reusability* part of the proof of Theorem 1 and the *security* arguments described above. In response to a query to *Gen* oracle, the oracle returns a pair of key r^i and ciphertext c^i to the adversary, where $r^i = R^i$ and $c = (p_1, \dots, p_\ell, T)$ according to the $Gen(W^i)$ procedure described in Figure 3. As W is a source with (α, m, N) -samples, in each *Gen* oracle query, $Gen(W^i)$ procedure runs with new samples with conditional entropy α . Hence, the uncertainty about the new samples remains the same before and after η *Gen* oracle (or generation oracle) queries from the adversary's perspective. Therefore, the entropy of each new samples remains same. Now proceeding in similar manner as the proof for the 'case $\eta = 1$ ', we can prove that, if $\xi \leq \alpha + 2 - 2 \cdot \log(\frac{4\ell}{\sigma}) - t - 2\lambda$, then the (Gen, Rep) described in Figure 3 is (η, σ) -reusable $(\mathcal{V}^n, \mathcal{W}, \xi, t', \epsilon', \sigma)$ -fuzzy extractor, where $(1 - (1 - \frac{t'}{n-m})^m)^\ell + \ell \cdot 2^{-t} \cdot L \cdot 2^{-\lambda} \leq \epsilon'$ and $\ell\eta m < N$.

Robustness. Robustness proof is given in Appendix E \square

E. Robustness Proof for Theorem 2

We need to prove our scheme satisfies Definition 5. We show that through q_e generation queries and q_d reproduction queries, the robustness is broken negligibly. Assume \mathcal{A} is the robustness attacker. Upon generation and reproduction queries, challenger acts normally. Denote this game Γ_0 . We now revise Γ_0 to Γ_1 so that $d_i = E(W[A_i], Z)$ is replaced by $d_i \leftarrow \{0, 1\}^\nu$ in generation query or reproduction query (for some A_i that does not appear in a previous query; otherwise, use the existing d_i). Let **Succ**(Γ) be the success event of \mathcal{A} in game Γ . Let d_i be taken from $d_i = E(W[A_i], Z)$ or $d_i \leftarrow \{0, 1\}^\nu$, for all i . Then, we consider a distinguisher that distinguishes Γ_0 and Γ_1 . Upon receiving d_i that is either $d_i = E(W[A_i], Z)$ or uniformly random, challenger prepares the public sampling randomness r that results in sampling A_i 's for all i 's in the challenge. Now challenger simulates Γ_0 with \mathcal{A} against it by providing \mathcal{A} with Z and public randomness r , except all d_i 's are from his challenge tuple. Finally, if \mathcal{A} succeeds, output 0; otherwise, output 1. The simulated game is a randomized function with input $\mathbf{d}_1, \dots, \mathbf{d}_{q_d+q_e}$ and a binary output 0 or 1, where \mathbf{d}_i is the vector of (d_1, \dots, d_ℓ) in the generation or a reproduction query (with new A_i 's). Denote this function by $G(\mathbf{d})$. Since A_1, \dots, A_ℓ by challenger or adversary is from public random string, $W[A_i]$ follows the distribution of (α, m, N) -source W . By claim 1 and Lemma 3, we immediately have the following.

Lemma 6. $|P(\text{Succ}(\Gamma_0)) - P(\text{Succ}(\Gamma_1))| \leq (q_d + q_e)\ell\epsilon$.

Now we consider the success event **Succ**(Γ_1). We assume \mathcal{A} will not query the output of generation query to the reproduction oracle as \mathcal{A} already knows the answer. Consider the i th reproduction query $\{A_i|p_i\}_{i=1}^\ell|T$. Let bit E_i be the decision bit for the reproduction query (0 for reject and 1 for success). We modify Γ_1 to Γ_2 such that if upon the first $E_i = 1$, then stop the security game. Obviously, $P(\text{Succ}(\Gamma_1)) = P(\text{Succ}(\Gamma_2))$. Let E_i^* be the event $E_i = 1$

while $E_j = 0$ for $j < i$. So $P(\text{Succ}(\Gamma_2)) \leq \sum_{i=1}^{q_d} P(E_i^*)$. We first bound $P(E_1^*)$.

Let this first reproduction query be $C_1 = (A'_1, p'_1, \dots, A'_\ell, p'_\ell, T')$, where A'_1, \dots, A'_ℓ are from public randomness r (note: they could be previously sampled in the generation query processing). Hence, d_1, \dots, d_ℓ for this query are uniformly random (as we consider Γ_2). For simplicity, some generation query has generated ciphertext C'_1 using the same sample set A'_1, \dots, A'_ℓ (otherwise, the proof will be similar and simpler). Assume d_1, \dots, d_ℓ generated p_1, \dots, p_ℓ, T for that generation query. We bound the probability that T' generated by \mathcal{A} is valid. Notice that each generation query uses independent d_i 's and hence can be simulated by \mathcal{A} . So we can assume that \mathcal{A} only issue one generation query (which uses A'_1, \dots, A'_ℓ). Denote this by Γ_2^1 . Let the hash output be T for the generation query. Since the reproduction query can not use the same ciphertext, assume $p'_i \neq p_i$. Hence, let $x|y = R_1$ in p_i and let $\delta_1|\delta_2$ be the last 2λ bits in $p_i \oplus p'_i \oplus E(o[A_i], A)$, where $o = W' - W$ is assumed to be known to \mathcal{A} (this will only increase the success probability of \mathcal{A}). Then, the decrypted tag key from C_1 using W' at verifier will be $(x + \delta_1)|(y + \delta_2)$. Hence, if T' is valid, we know that $T = x^L + x^2m(x) + xy$ and $T' = (x + \delta_1)^L + (x + \delta_1)^2m'(x + \delta_1) + (x + \delta_1)(y + \delta_2)$, with $L = \lceil \nu\ell/\lambda \rceil + 4$. Since now x, y are uniformly random λ bits and are independent of $(A_1|p_1|\dots|p_\ell|A_\ell)$ due to the one-time pads d_1, \dots, d_ℓ (hence independent of the encoded vector \mathbf{m}), by Lemma 2, conditional on T , the probability that T' is valid is at most $2^{-\lambda}(L + 1)$. Further, there are at most ℓ possible i . Thus, $P(E_1^*) \leq 2^{-\lambda}\ell(L + 1)$.

Now we consider $P(E_k^*)$. To evaluate this, we consider a variant Γ_2^3 of Γ_2 where the t th reproduction query for $t < k$ is decided as reject (without verifying the tag T in its query). Let Σ be the randomness of Γ_2 . Then, if Σ leads to reject for all previous $k - 1$ reproduction query, then adversary view in Γ_2^3 and Γ_2 is identical; otherwise, some **reject** of some t th reproduction query is wrong. But in this case, E_k^* will not occur. It follows $P(E_k^*(\Gamma_2)) = P(E_k^*(\Gamma_2^3))$. On the other hand, since the previous $k - 1$ reproduction query always results in reject, it can be simulated by \mathcal{A} himself. Hence, $P(E_k^*(\Gamma_2^3)) = P(E_1^*)$. It follows that $P(\text{Succ}(\Gamma_2)) \leq q_d P(E_1^*) \leq q_d 2^{-\lambda}\ell(L + 1)$. From Lemma 6 and $P(\text{Succ}(\Gamma_1)) = P(\text{Succ}(\Gamma_2))$, it follows that $P(\text{Succ}(\Gamma_0)) \leq (q_d + q_e)\ell\epsilon + q_d 2^{-\lambda}\ell(L + 1)$. \square

F. Proofs of Basic Results in Section III

Proof of Claim 1. By calculation, we have

$$\begin{aligned} & \Delta(F(X); F(Y)) \\ &= \frac{1}{2} \sum_{v \in \mathcal{V}} |\Pr[F(X) = v] - \Pr[F(Y) = v]| \\ &= \frac{1}{2} \sum_{v \in \mathcal{V}} |\sum_{u: F(u)=v} (\Pr[X = u] - \Pr[Y = u])| \\ &\leq \frac{1}{2} \sum_{v \in \mathcal{V}} \sum_{u: F(u)=v} |\Pr[X = u] - \Pr[Y = u]| \\ &= \Delta(X; Y). \end{aligned} \quad \square$$

Proof of Lemma 3. Use induction. When $\mu = 1$, it holds from assumption and Claim 1. If it holds for $\mu = k - 1$,

consider case $\mu = k$. By assumption, $E(\tilde{U}, Z) = U$. Note that $d_i = E(W[A_i], Z)$. We have

$$\begin{aligned} & \Delta(d, Z, \mathbf{A}; U^k, Z, \mathbf{A}) \\ & \leq \Delta(d_k, \mathbf{d}^{k-1}, Z, \mathbf{A}; U, \mathbf{d}^{k-1}, Z, \mathbf{A}) + \\ & \quad \Delta(U, \mathbf{d}^{k-1}, Z, \mathbf{A}; U, U^{k-1}, Z, \mathbf{A}) \\ & \leq \Delta(d_k, \{W[A_i]\}_1^{k-1}, Z, \mathbf{A}; U, \{W[A_i]\}_1^{k-1}, Z, \mathbf{A}) + \\ & \quad \Delta(\mathbf{d}^{k-1}, Z, \mathbf{A}; U^{k-1}, Z, \mathbf{A}) \\ & \leq \epsilon + (k-1)\epsilon = k\epsilon, \end{aligned}$$

where the 2nd inequality follows from Claim 1; the first part of the last inequality follows from the definition of E and $\tilde{H}_\infty(W[A_k] \mid \{W[A_i]\}_1^{k-1}, \mathbf{A}) \geq \alpha$ (from definition of W); the second part follows from the induction assumption with the fact that A_k is independent of the remaining random variable. \square

Proof of Lemma 4. Let $d_i = E(W[A_i], Z)$. Denote $d_i = X_i|Y_i$ with X_i the first t bits and Y_i the remaining bits of d_i . Let U_1, U_2 be uniformly random variables in the domain of X_1, Y_1 respectively. Let $\mathbf{U}_1, \mathbf{U}_2$ be ℓ iid copies of U_1, U_2 respectively. For vector \mathbf{v} and variable α , $\mathbf{v} \oplus \alpha$ denotes $(v_1 \oplus \alpha, \dots, v_\ell \oplus \alpha)$. For simplicity, let $C = (Z, \mathbf{A})$.

$$\begin{aligned} & \Delta(S, \mathbf{p}, C; U, \mathbf{p}, C) \\ & = \Delta(S, \mathbf{d}, C; U, \mathbf{d}', C), \text{ where } \mathbf{d}' = \mathbf{d} \oplus 0^t | S \oplus 0^t | U \\ & = \Delta(P_{S\mathbf{d}C}; P_U P_{\mathbf{d}'C}) \\ & = \Delta(P_{\mathbf{d}C}; P_{\mathbf{d}'C}), \text{ (as } S \text{ is independent of } (\mathbf{d}, C) \text{ and distributed as } U) \\ & = \Delta(P_{\mathbf{X}\mathbf{Y}C}; P_{\mathbf{X}, \mathbf{Y} \oplus V, C}), \text{ (let } V \stackrel{\text{def}}{=} U \oplus S) \\ & \leq \Delta(P_{\mathbf{X}\mathbf{Y}C}; P_{\mathbf{U}_1 \mathbf{U}_2 C}) + \Delta(P_{\mathbf{U}_1 \mathbf{U}_2 C}; P_{\mathbf{X}, \mathbf{Y} \oplus V, C}) \\ & \leq \ell\epsilon + \Delta(P_{\mathbf{U}_1 \mathbf{U}_2 C}; P_{\mathbf{X}, \mathbf{Y} \oplus V, C}), \text{ (Lemma 3)} \\ & \leq \ell\epsilon + \Delta(P_{\mathbf{U}_1 \mathbf{U}_2 C V}; P_{\mathbf{X}, \mathbf{Y} \oplus V, C, V}) \\ & = \ell\epsilon + \Delta(P_{\mathbf{U}_1, \mathbf{U}_2 - V, C, V}; P_{\mathbf{X}, \mathbf{Y}, C, V}) \\ & = \ell\epsilon + \Delta(P_{\mathbf{U}_1 \mathbf{U}_2 C V}; P_{\mathbf{X}\mathbf{Y}C V}) \\ & \quad (\mathbf{U}_2 \text{ and } \mathbf{U}_2 - V \text{ are identical, independent of the remaining variables}) \\ & = \ell\epsilon + \Delta(P_{\mathbf{U}_1 \mathbf{U}_2 C}; P_{\mathbf{X}\mathbf{Y}C}), \text{ (} V \text{ is independent of the remaining variables)} \\ & \leq 2\ell\epsilon, \text{ (Lemma 3)} \quad \square \end{aligned}$$

Proof of Lemma 5. In Lemma 4, $S = R|R_1$ in our scheme. Thus,

$$\Delta(R|R_1, \mathbf{p}, Z, \mathbf{A}; U|U_1, \mathbf{p}, Z, \mathbf{A}) \leq 2\ell\epsilon,$$

where U (resp. U_1) is uniform ξ -bit (resp. 2λ -bit). Let $C = (\mathbf{p}, Z, \mathbf{A})$. By claim 1, let $F(R|R_1, C) = (R, C, T)$. Then, $\Delta(R, C, T; U, C, U') \leq 2\ell\epsilon$, where $U' = \text{tag}(U_1, C)$ and $\text{tag}(\cdot)$ is the tag algorithm in our scheme used to compute T . Notice that

$$\begin{aligned} & \Delta(R, C, T; U, C, T) \\ & \leq \Delta(R, C, T; U, C, U') + \Delta(U, C, U'; U, C, T) \\ & \leq \Delta(R|R_1, C; U|U_1, C) + \Delta(U, C, U'; U, C, T), \text{ (Claim 1)} \\ & \leq 2\ell\epsilon + \Delta(C, U'; C, T), \text{ (Lemma 4; } U \text{ is ind of } \mathbf{p} \text{ and } T, U') \end{aligned}$$

$$\leq 2\ell\epsilon + \Delta(U_1, C; R_1, C), \quad (\text{Claim 1})$$

$$\leq 4\ell\epsilon, \quad (\text{Claim 1 and Lemma 4})$$

This completes our proof. \square

G. Figure for construction 2

Figure 4 depicts pictorial representation of construction 2.

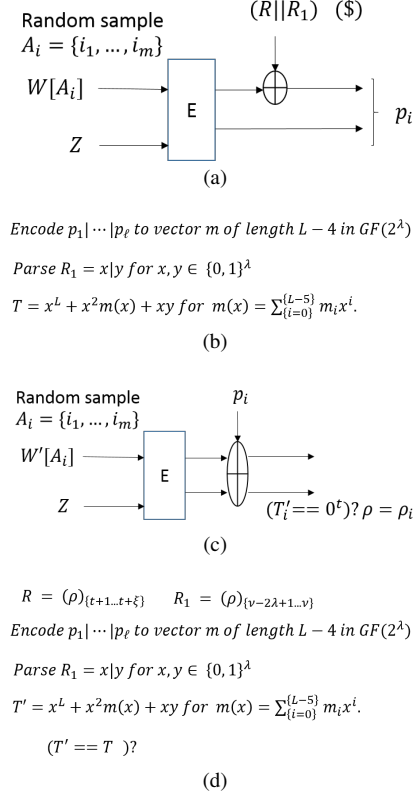


Fig. 4. High level diagram of fuzzy extractor construction 2. Both $Gen(W)$ and $Rep(W')$ procedure are split into two parts. 4(a): The first part of $Gen(W)$. This part iterates ℓ times. 4(b): The second part of $Gen(W)$. This step is executed after completion of ℓ iterations of 4(a). 4(c): The First part of $Rep(W')$. This step is executed at most ℓ times until one match $(T'_i == 0^t)$ is found. 4(d): The second part of $Rep(W')$. This part is executed after one match in 4(c). If verification of $(T' == T)$ fails, the algorithm continues from the part 4(c) again. The upper line of each extractor represents higher order $\xi + 2\lambda$ bits of its output i.e. $(E(\cdot))_{t+1 \dots \nu}$. The lower line of each extractor represents lower order t bits of its output i.e. $(E(\cdot))_{1 \dots t}$. Extracted key is R . Randomness Z is public