ARTICLE

ProCoT: Stimulating Critical Thinking and Writing of Students through Engagement with Large Language Models (LLMs)

Tosin Adewumi^{*}, Lama Alkhaled, Claudia Buck, Sergio Serrano Hernández, Saga Brilioth, Mkpe O. Kekung, Yelvin Ragimov, and Elisa Barney.

Luleå University of Technology (LTU), Sweden; *Corresponding author (tosin.adewumi@ltu.se)

ARTICLE HISTORY

Compiled May 2, 2024

ABSTRACT

We introduce a novel writing method called Probing Chain-of-Thought (ProCoT), which potentially prevents students from cheating using a Large Language Model (LLM), such as ChatGPT, while enhancing their active learning. LLMs have disrupted education and many other fields. For fear of students cheating, many have resorted to banning their use. These LLMs are also known for hallucinations. We conduct studies with ProCoT in two different courses with 65 students. The students in each course were asked to prompt an LLM of their choice with one question from a set of four and required to affirm or refute statements in the LLM output by using peer-reviewed references. The results show two things: (1) ProCoT stimulates creative/critical thinking and writing of students through engagement with LLMs when we compare the LLM-only output to ProCoT output and (2) ProCoT can prevent cheating because of clear limitations in existing LLMs, particularly ChatGPT, when we compare students' ProCoT output to LLM ProCoT output. We also discover that most students prefer to give answers in fewer words than LLMs, which are typically verbose. The average word counts for students in the first course, ChatGPT (v3.5), and Phind (v8) are 208, 391 and 383, respectively.

KEYWORDS

LLM, ChatGPT, ProCoT, Cheating, Education, Pedagogy

1. Introduction

A chain of thought is a sequence of intermediate reasoning steps (Wei et al., 2022). Chain-of-thought (CoT) prompting allows a sufficiently Large Language Model (LLM) to solve a problem as a clear sequence of steps before a final answer. An LLM, which is typically a deep neural probabilistic model (Brown et al., 2020), such as ChatGPT¹, has the ability to generate convincing outputs when given inputs, called prompts. The use of such Artificial Intelligence (AI) tools, particularly ChatGPT, has gained immense popularity in many fields in the last one year (Allam et al., 2023). They have also gained notoriety for suspected cheating, particularly in the Education field (Cotton, Cotton, & Shipway, 2023; Ventayen, 2023). This is besides the hallucinations (or ungrounded addition) problem with LLMs (T. Adewumi, Liwicki, & Liwicki, 2022;

 $[\]rm https://orcid.org/0000\text{-}0002\text{-}5582\text{-}2031$

 $^{^{1}}$ openai.com

Rawte, Sheth, & Das, 2023), which occurs partly because they are typically trained on static data, with no updates through time. Humans, on the other hand, can source and use real-world context to verify the veracity of claims (Maslej et al., 2023).

Topic-based writing has always been a common way of assessing students (Todd, Thienpermpool, & Keyuravong, 2004). However, the capability of LLMs to completely or partially generate content as desired by a user appears to be putting a threat to students writing own their own. The research question we address in this work is: 'Is there a way to both prevent cheating in writing by students through LLMs and also engage them in the use of such AI tools?' The generative power of these LLMs makes it imperative to ask similar questions regarding coding, mathematics and other similar tasks.

We introduce Probing Chain-of-Thought (ProCoT), a method aimed at stimulating creative/critical thinking and writing of students through engagement with LLMs, given that these models are here to stay. We demonstrate this method in two University courses (an Erasmus+ blended intensive program (BIP) (Commission, 2022) and a full semester course) for two sets of students. The students were free to use the LLM of their choice and 95% used ChatGPT² (v3.5) while 5% used Phind³ (v8) in the BIP. Similarly, most of the students in the second course used ChatGPT (96%) while BingAI⁴ was 4%. We believe ProCoT will empower educators to no longer fear LLMs but see them as technological tools and students will be better critical thinkers. Also, it may be applied to any field that uses writing.

1.1. Our Contributions

- (1) ProCoT prevents cheating through LLMs by students.
- (2) ProCoT stimulates creative/critical thinking and writing of students through engagement with LLMs
- (3) ProCoT will provide valuable data to further train LLMs to be better models without privacy issues.

The rest of this paper is organized as follows. Section 2 discusses the background and literature review, including LLMs. Section 3 describes in detail the methods we follow, including the two cases. Section 4 discusses the outcome in results that also present statistical analyses. Section 5 briefly gives concluding remarks.

2. Background and Literature Review

In essay writing assessments, students are asked to demonstrate a point of view (Todd et al., 2004) and this may be supported by evidence (e.g. through peer-reviewed references). This allows students to show what they have learnt and build their writing skills.

2.1. Essay Writing and Evaluation

The pedagogy of essay writing evaluation requires a comprehensive approach that focuses on student learning and development. Central to this is the use of rubrics, which

²openai.com

³phind.com

⁴bing.com/search?q=Bing%20AI&showconv=1&form=MA13FV (limited to 2,000 characters of input)

are detailed guides laying out the expected criteria for an essay (Lipnevich, Panadero, & Calistro, 2023). They may cover aspects like the strength of an argument, the use of evidence (or references), and the organization of ideas (Todd et al., 2004). A formative approach to evaluation, based on quality feedback, helps students identify their strengths and weaknesses and fosters a growth mindset (Porter, 2022; Spector et al., 2016). These methods also provide transparency and ensure alignment with intended learning outcomes (ILOs) (Le, Phuong, Phan, & Le, 2023; Ramesh & Sanampudi, 2022).

Peer review and self-assessment are also important in pedagogy. By engaging in peer review, students develop critical thinking skills (Cheong, Luo, Zhu, Lu, & Wei, 2023) while self-assessment encourages students to reflect on their own writing, fostering a sense of ownership and responsibility (Culver, 2023). Encouraging reflection is vital in the pedagogical evaluation of any writing. It helps students to be more independent and confident writers (Pang, 2022). The pedagogical evaluation of writing is a comprehensive yet subjective process (Todd et al., 2004). It is a crucial component of the educational journey that plays a significant role in the overall development of students, both as critical thinkers and skilled writers.

2.2. Large Language Models (LLMs)

An LLM aims to mimic human language patterns, responses, and general linguistic structures after training. It is a deep probabilistic model that is trained on big data to generate probabilities over a set of tokens (or words) for predicting the next token in a sequence and there are many types with different sizes (T. Adewumi et al., 2023; Brown et al., 2020; Touvron et al., 2023). These models are usually based on the Transformer, which is a deep neural network architecture (Vaswani et al., 2017). They are trained to perform Natural Language Processing (NLP) tasks, like reading comprehension, summarization, and question answering (Radford et al., 2019; Touvron et al., 2023).

By far, the most popular example of an LLM is OpenAI's ChatGPT², though there are several others, like Gemini⁵ by Google DeepMind and LLAMA-2 (Touvron et al., 2023) by Meta. ChatGPT, now in vesion 4 (Natalie, 2023), is an advanced LLM. It is the latest in the family of Generative Pre-trained Transformer (GPT) models, which began with GPT-1 while version 2 (Radford et al., 2019) in 2019 is recognized as possibly the first LLM because of its size of 1.5B parameters (Maslej et al., 2023). ChatGPT (v3.5) is available for free to users through a web interface or for a fee after a certain period through an Application Programming Interface (API).

LLMs offer a myriad of benefits, including assistance in learning, improvement in language skills, access to extensive information, and the provision of customized learning experiences. Particularly, the capabilities of ChatGPT to generate coherent and contextually relevant text based on prompts have made it popular. Similarly to other machine learning (ML) models (Yamamoto, Umemura, & Kawano, 2018), it may be used to assist in evaluating student essays and providing feedback. The use of LLMs in education is not without challenges, however (Meyer et al., 2023; Sok & Heng, 2023; Sullivan, Kelly, & McLaughlan, 2023). Over-reliance on these models can potentially lead to diminished critical thinking abilities in students. Another critical aspect to consider is the inherent biases in LLMs (T. Adewumi et al., 2022; T. P. Adewumi, Liwicki, & Liwicki, 2019; Meyer et al., 2023). Since these models are trained on existing data, they may unintentionally reflect and reinforce any biases that exist in the

 $^{^5 {\}it deepmind.google/technologies/gemini}$

data they were trained on, which could affect the quality and fairness of information provided to students. Ensuring responsible AI use is paramount to maintaining a safe and productive learning environment (Vinuesa et al., 2020).

2.3. LLM Fact-Checking Methods

In recent years, LLM fact-checking methods have emerged for combating misinformation. Retrieval Augmented Generation (RAG) models (Lewis et al., 2020), which combine information retrieval and generation, and special-purpose knowledge bases or datasets are useful in this regard. A few datasets that are used for fact-checking in LLMs are listed below. The availability of these methods have not made LLMs error-free, indicating that more work still needs to be done by the research community.

- (1) FEVER (Thorne, Vlachos, Christodoulopoulos, & Mittal, 2018) Fact Extraction and VERification (FEVER) is a widely used dataset that consists of claims and evidence, allowing LLMs to learn to validate or debunk statements based on the supporting information. The statements from the dataset are from Wikipedia and claims are classified as Supported, Refuted or NotEnoughInfo.
- (2) ClaimBuster (Arslan, Hassan, Li, & Tremayne, 2020) ClaimBuster is a dataset of 23,533 statements that is designed to identify claims which are worth fact-checking. The statements are extracted from U.S. general election presidential debates. There are three possible categories in the data: non-factual, unimportant factual statement, and check-worthy factual statement.

3. Methodology

Probing the chain-of-thought (output) of an LLM involves students scrutinizing the output by using a reference-based platform to provide time-relevant fact-checked feedback on the output. The method is entrenched in the 'Self-Regulation' method (Zimmerman, 2013), which is the self-directive process by which learners transform their mental abilities into task-related skills. It involves the following components in an iterative process: forethought, planning, monitoring, failure detection and correction. It leads to faster independence and self-awareness of students. ProCoT may even be applied to other outputs, besides those of LLMs.

We compare the quality of students' writing, as evaluated by a human subject expert and using statistical analysis, to establish the effectiveness of ProCoT. We compare 1) LLM-only outputs, 2) students' ProCoT outputs, and 3) LLM ProCoT outputs. LLM-only output is the result of asking the model any of the the original questions among the lists in the sub-sections below. Meanwhile, a student's ProCoT output is the feedback provided (with peer-reviewed references) for the LLM-only output while an LLM ProCoT output is the LLM feedback to their original (LLM-only) output. We give the same instruction that is given to the students to the LLM when generating the LLM ProCoT output. This is to determine if the students can cheat by generating ProCoT feedback successfully with the LLM and pass them off as their own. These evaluations are carried out in two cases involving two different courses and two different sets of students.

3.1. Case 1

The first case involves 26 students, where about 88% are Masters students, 9% Bachelor's, and 3% PhD, at a BIP. A BIP is a short programme that combines physical mobility with a virtual part. The 6-day BIP was titled 'DigiHealth-AI: Practice, Research, Ethics, and Regulation' and organized in collaboration with partners from four European countries.

The students were asked to pose one out of the four questions below to any LLM. The questions were randomly selected from two blogs. Thereafter, the ProCoT instruction was 'Write 1 page to affirm or refute assertions/statements made by ChatGPT/LLM in the response by using references from peer-reviewed articles'. The students were under supervision for a 30-minute period while providing answers.

- (1) Did cancer exist before man-made chemicals were around to create it?
- (2) Who will benefit from AI in healthcare?
- (3) How long do you have to exercise for it to count?
- (4) How will we avoid machine bias?

3.2. Case 2

This case had 39 students who were all Masters students. The course is titled 'Text Mining' and is a regular semester course. Again, each student was asked to pose one out of the four questions below to any LLM. The questions were randomly selected from a list of 50 exam questions, which are dedicated to the course. Thereafter, the ProCoT instruction was 'Write, at least, 300 words (excluding the reference section) to affirm or refute statements made by ChatGPT/LLM by using (at least 5) references from peer-reviewed articles or books'. The students were allowed to go with the task and submit within a week.

- (1) What is a large language model (LLM)?
- (2) What is the vanishing gradient problem and how is it tackled?
- (3) Describe the two paradigms of using a pre-trained model in transfer learning: feature extraction and fine-tuning.
- (4) Name two similarity measurement metrics for vectorized semantic representation. Which one may be preferred and why?

4. Results and Discussion

4.1. Case 1

Two out of twenty-six submissions from the students were rejected for lack of compliance to the ProCoT instructions. Results from the valid students' ProCoT answers show that **cheating can be prevented** by framing questions as we have done with ProCoT. Comparing the LLM ProCoT feedback on its answers to the original questions⁷, ChatGPT expressly says 'I cannot provide direct references to peer-reviewed articles' on the one hand while saying 'numerous studies in peer-reviewed literature support' its answer. In one instance, though, it referenced a doi, which directed to a paper that was less than suitable. Phind, meanwhile, appears to be better at providing

 $^{^6} w tamu.edu/\ cbaird/sq/category/health;\ magazine.utoronto.ca/research-ideas$

⁷on 12 December, 2023

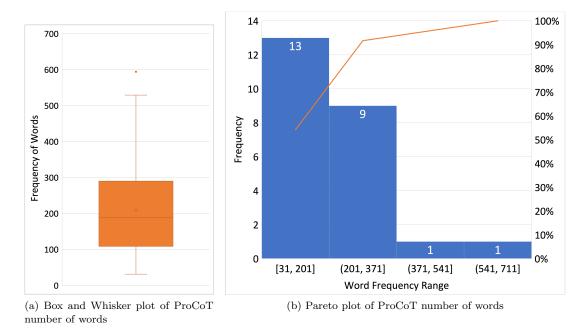


Figure 1. Case 1: Quantitative plots of ProCoT number of words in student answers.

peer-reviewed references, though some references are blog posts. However, it appears to lift the same content supplied to it as if regurgitating (in what may be considered plagiarism) more than paraphrasing the content or generating original response for engaging communication. Therefore, the quality of students' ProCoT answers (on the basis of grounding by references) is better than those by ChatGPT, though ChatGPT usually gives more comprehensive answers that are typically verbose but not necessarily always factual. They are also better than those by Phind on the basis of originality, though Phind may also give more verbose answers.


The minimum, median, maximum, and average word counts for the students' Pro-CoT answers are 31, 189, 594, and 208, respectively, as shown in the Box plot of Figure 1 (a). Figure 1 (b) shows the Pareto plot for the words in their answers, where most students used word counts in the range 31 and 201. This implies most students prefer using fewer words to express their answers. ChatGPT gave an average word count of 391 in its ProCoT answers while Phind gave 383. These indicators of the average word counts by students and LLMs may be useful as cues for possible cheating, besides LLM artefacts that may result from copying an LLM output unedited. This is because possible cheating through prompt engineering on an LLM to fix the word count is known to work poorly.⁸ It is important to emphasize that word count alone is not enough to conclude that cheating has occurred.

4.2. Case 2

Out of the 39 submissions, 26 were valid because they followed the instructions, particularly with grounding their argument with peer-reviewed references. In all the Chat-GPT ProCoT answers⁹, only in-text citation is provided, when it does use references.

 $^{^8} platform.openai.com/docs/guides/prompt-engineering/strategy-provide-reference-text$

⁹on 20 December, 2023

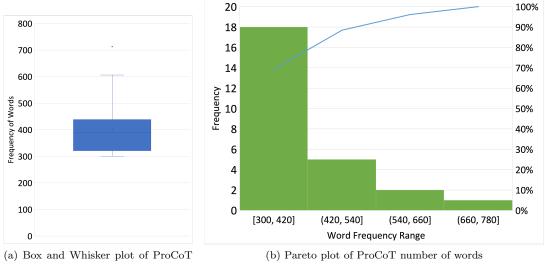

number of words

Figure 2. Case 2: Quantitative plots of ProCoT number of words in student answers.

With regards to question 1 about LLM in the previous section, ChatGPT's ProCoT answer does not give any reference and merely regurgitates what was stated earlier rather than affirm or refute what was given. With regards to question 2 about the vanishing gradient, ChatGPT's ProCoT answer gives 7 relevant references. With regards to question 3 on transfer learning, ChatGPT's ProCoT answer gives 5 relevant references. With regards to ChatGPT's answer to question 4 on similarity metrics, its ProCoT answer fails to follow the instruction, as it did not provide the minimum references, which is one of the reasons for rejecting some students' submissions. BingAI, on the other hand, in all cases regurgitated the input and provided 4-6 blogs as references (when it provides references) instead of peer-reviewed articles. It then adds a short paragraph as conclusion in 2 out of the 4 instances. The appendix contains some of the examples.

Again, students use fewer words, as will be observed from Figure 2, preferring to align with the minimum word count of 300. The median, maximum, and average word counts are 389, 713, and 405, respectively. The average word counts for ChatGPT and BingAI are 356 and 315, respectively. We assume the students' average word count is higher in this case because we required a minimum number of words. It might be helpful to remove this restriction, as done in case 1, as a possible cue for cheating.

5. Conclusion

ProCoT shows that educators need not fear LLMs but embrace them as powerful tools to enrich the experiences of students in learning. Weaknesses currently exist in the most popular free LLM - ChatGPT, and this makes it useful for teaching students to be better writers by grounding their writing in peer-reviewed references. Observations from the results and ongoing research into LLMs imply these models will improve over time, especially as new data from methods like ProCoT can be used to retrain these models to be better. They will become better grounded in their knowledge. For example, we observe improvements in case 2 over case 1, which had one week difference between them, though it should be noted that the topics are different.

Hence, new methods may be required to evaluate students' writing performance and learning in the future. We believe this is not a reason for educators to fear or bar students from using these tools but to see the opportunity to stimulate critical thinking through the engagement of students with these tools. This will be possible through evolving, active and innovative methods. Multimodal evaluation may be the solution in the future or methods that are grounded in interview/oral assessments.

Acknowledgement(s)

This work is supported by the Wallenberg AI, Autonomous Systems and Software Program (WASP), funded by Knut and Alice Wallenberg Foundations and counterpart funding from Luleå University of Technology (LTU).

Disclosure statement

The authors report there are no competing interests to declare.

References

- Adewumi, T., Adeyemi, M., Anuoluwapo, A., Peters, B., Buzaaba, H., Samuel, O., . . . Liwicki, M. (2023). Afriwoz: Corpus for exploiting cross-lingual transfer for dialogue generation in low-resource, african languages. In 2023 international joint conference on neural networks (ijcnn) (p. 1-8).
- Adewumi, T., Liwicki, F., & Liwicki, M. (2022). State-of-the-art in open-domain conversational ai: A survey. *Information*, 13(6). Retrieved from https://www.mdpi.com/2078-2489/13/6/298
- Adewumi, T. P., Liwicki, F., & Liwicki, M. (2019). Conversational systems in machine learning from the point of view of the philosophy of science—using alime chat and related studies. *Philosophies*, 4(3), 41–0. Retrieved from https://www.mdpi.com/2409-9287/4/3/41
- Allam, O., Williams, M., Almeida, M., Alper, D., Craver, A., Persing, J., & Alperovich, M. (2023, 10). Generative pre-trained transformers (gpt) artificial intelligence assessing the accuracy of chatgpt as an adjunct for peri-operative care. *Plastic and Reconstructive Surgery Global Open*, 11, 132-133.
- Arslan, F., Hassan, N., Li, C., & Tremayne, M. (2020). A benchmark dataset of check-worthy factual claims. In *Proceedings of the international aaai conference on web and social media* (Vol. 14, pp. 821–829).
- Brown, T. B., Mann, B., Ryder, N., Subbiah, M., Kaplan, J., Dhariwal, P., ... Amodei, D. (2020). Language models are few-shot learners.
- Cheong, C. M., Luo, N., Zhu, X., Lu, Q., & Wei, W. (2023). Self-assessment complements peer assessment for undergraduate students in an academic writing task. Assessment & Evaluation in Higher Education, 48(1), 135-148.
- Commission, E. (2022). Blended mobility implementation guide for erasmus+ higher education mobility ka131.
- Cotton, D. R., Cotton, P. A., & Shipway, J. R. (2023). Chatting and cheating: Ensuring academic integrity in the era of chatgpt. Innovations in Education and Teaching International, 1–12.

- Culver, C. (2023). Learning as a peer assessor: evaluating peer-assessment strategies. Assessment & Evaluation in Higher Education, 48(5), 581–597.
- Le, X.-M., Phuong, H.-Y., Phan, Q.-T., & Le, T.-T. (2023). Impact of using analytic rubrics for peer assessment on eff students' writing performance: An experimental study. *Multicultural Education*, 9(3).
- Lewis, P., Perez, E., Piktus, A., Petroni, F., Karpukhin, V., Goyal, N., ... others (2020). Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33, 9459–9474.
- Lipnevich, A. A., Panadero, E., & Calistro, T. (2023). Unraveling the effects of rubrics and exemplars on student writing performance. *Journal of Experimental Psychology: Applied*, 29(1), 136.
- Maslej, N., Fattorini, L., Brynjolfsson, E., Etchemendy, J., Ligett, K., Lyons, T., ... others (2023). Artificial intelligence index report 2023. arXiv preprint arXiv:2310.03715.
- Meyer, J. G., Urbanowicz, R. J., Martin, P. C., O'Connor, K., Li, R., Peng, P.-C., . . . others (2023). Chatgpt and large language models in academia: opportunities and challenges. *BioData Mining*, 16(1), 20.
- Natalie. (2023). Chatgpt release notes openai help center. Retrieved from https://help.openai.com/en/articles/6825453-chatgpt-release-notes
- Pang, N. S.-K. (2022). Teachers' reflective practices in implementing assessment for learning skills in classroom teaching. *ECNU Review of Education*, 5(3), 470–490.
- Porter, G. (2022). Collaborative annotation: Links to formative assessment and issues of scale for pedagogy. In *Proceedings of the ninth acm conference on learning@ scale* (pp. 313–316).
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al. (2019). Language models are unsupervised multitask learners. *OpenAI blog*, 1(8), 9.
- Ramesh, D., & Sanampudi, S. K. (2022). An automated essay scoring systems: a systematic literature review. *Artificial Intelligence Review*, 55(3), 2495–2527.
- Rawte, V., Sheth, A., & Das, A. (2023). A survey of hallucination in large foundation models. arXiv preprint arXiv:2309.05922.
- Sok, S., & Heng, K. (2023). Chatgpt for education and research: A review of benefits and risks. Available at SSRN 4378735.
- Spector, J. M., Ifenthaler, D., Sampson, D., Yang, J. L., Mukama, E., Warusavitarana, A., ... others (2016). Technology enhanced formative assessment for 21st century learning.
- Sullivan, M., Kelly, A., & McLaughlan, P. (2023). Chatgpt in higher education: Considerations for academic integrity and student learning.
- Thorne, J., Vlachos, A., Christodoulopoulos, C., & Mittal, A. (2018). FEVER: a large-scale dataset for fact extraction and VERification. In *Naacl-hlt*.
- Todd, R. W., Thienpermpool, P., & Keyuravong, S. (2004). Measuring the coherence of writing using topic-based analysis. Assessing writing, 9(2), 85–104.
- Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., ... others (2023). Llama 2: Open foundation and fine-tuned chat models. arXiv preprint arXiv:2307.09288.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., ... Polosukhin, I. (2017). Attention is all you need. Advances in neural information processing systems, 30.
- Ventayen, R. J. M. (2023). Chatgpt by openai: Students' viewpoint on cheating using artificial intelligence-based application. Available at SSRN 4361548.
- Vinuesa, R., Azizpour, H., Leite, I., Balaam, M., Dignum, V., Domisch, S., ... Fuso Nerini, F. (2020). The role of artificial intelligence in achieving the sustainable development goals. *Nature communications*, 11(1), 1–10.
- Wei, J., Wang, X., Schuurmans, D., Bosma, M., Xia, F., Chi, E., ... others (2022). Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems*, 35, 24824–24837.
- Yamamoto, M., Umemura, N., & Kawano, H. (2018). Automated essay scoring system based on rubric. Applied computing & information technology, 177–190.
- Zimmerman, B. J. (2013). Theories of self-regulated learning and academic achievement: An

Appendices

Question 2 (Case 1):

Who will benefit from AI in healthcare?

ChatGPT Answer/Output: AI has the potential to benefit various stakeholders in the field of healthcare. Here are some of the key groups that stand to benefit from AI in health:

- Patients:Improved Diagnostics: AI can assist in faster and more accurate disease diagnosis, leading to earlier and more effective treatments.
- Personalized Medicine: AI can help tailor treatment plans to individual patient profiles, increasing the likelihood of successful outcomes.
- Remote Monitoring: AI-powered devices and apps can enable remote monitoring
 of health conditions, allowing patients to better manage chronic illnesses and
 receive timely interventions.
- Enhanced Access: AI can improve access to healthcare services, especially in underserved or remote areas, through telemedicine and virtual health assistants.
- Healthcare Providers: Clinical Decision Support: AI can provide healthcare professionals with valuable insights and recommendations, aiding in diagnosis and treatment decisions.
- Administrative Efficiency: AI can streamline administrative tasks, such as appointment scheduling and medical coding, reducing the administrative burden on healthcare staff.
- Predictive Analytics: AI can predict disease outbreaks and patient needs, helping hospitals allocate resources more efficiently.
- Reduced Burnout: Automation of repetitive tasks can reduce the burnout experienced by healthcare workers.
- Researchers and Drug Development:Drug Discovery: AI accelerates drug discovery by identifying potential drug candidates and predicting their efficacy.
- Data Analysis: AI can analyze vast amounts of medical data to uncover patterns and insights that may lead to breakthroughs in medical research.
- Clinical Trials: AI can optimize patient recruitment for clinical trials and assist in monitoring trial data.
- Healthcare Payers and Insurance Companies:Improved Risk Assessment: AI can help insurers assess risk more accurately, leading to more personalized and competitive insurance plans.
- Fraud Detection: AI can detect and prevent healthcare fraud, saving costs for insurance companies.
- Population Health Management: AI can assist in managing the health of covered populations more effectively, reducing overall healthcare expenses.
- Governments and Public Health Organizations: Disease Surveillance: AI can help in monitoring disease outbreaks, facilitating rapid responses to public health emergencies.

Health Policy and Planning: AI can provide insights for policymakers to make data-

driven decisions on healthcare infrastructure and resource allocation. AI-driven home healthcare devices and monitoring systems can help caregivers and family members provide better care and peace of mind for their loved ones.

Caregivers and Family Members: While AI has the potential to provide numerous benefits in healthcare, it's important to address ethical, privacy, and security concerns to ensure that these technologies are used responsibly and for the benefit of all stakeholders in the healthcare ecosystem. Additionally, equitable access to AI-driven healthcare solutions and addressing potential biases are important considerations to ensure that the benefits of AI are distributed fairly.

ChatGPT ProCoT Answer/Output: The statements are generally affirmed. Numerous studies and reviews in peer-reviewed literature support the potential benefits of AI in healthcare for various stakeholders. While I cannot provide direct references to specific articles, I can highlight the broad consensus from the literature.

Patients:

- Improved Diagnostics: Studies have explored the use of AI in improving diagnostic accuracy across various medical domains. For example, AI models have been developed for early detection of diseases such as cancer and diabetic retinopathy.
- Personalized Medicine: AI-driven approaches, including machine learning algorithms, have been investigated for tailoring treatment plans based on individual patient characteristics. Personalized medicine is an active area of research in oncology and other fields.
- Remote Monitoring: AI-powered devices and applications have been studied for remote monitoring of health conditions. This includes wearable devices and smartphone apps that enable continuous monitoring of vital signs and chronic disease management.
- Enhanced Access: Telemedicine, powered by AI applications, has demonstrated potential in improving access to healthcare services, especially in underserved or remote areas.

Healthcare Providers:

- Clinical Decision Support: The literature supports the use of AI for clinical decision support, providing insights and recommendations to healthcare professionals in diagnostics and treatment planning.
- Administrative Efficiency: Administrative tasks, such as appointment scheduling and medical coding, are areas where AI applications have shown promise in improving efficiency.
- Predictive Analytics: AI-driven predictive analytics has been explored for predicting disease outbreaks and optimizing resource allocation in healthcare settings.
- Reduced Burnout: Studies have investigated the impact of automation and AI in reducing the burden of repetitive tasks, contributing to the potential reduction in burnout among healthcare workers.

Researchers and Drug Development:

- Drug Discovery: AI has been increasingly utilized in drug discovery, offering computational approaches for identifying potential drug candidates and predicting their efficacy.
- Data Analysis: The application of AI in analyzing large-scale medical data for

- research purposes has been well-documented in the literature.
- Clinical Trials: AI has been explored for optimizing patient recruitment in clinical trials and assisting in the monitoring of trial data.

Healthcare Payers and Insurance Companies:

- Improved Risk Assessment: AI applications have been studied for more accurate risk assessment, contributing to the development of personalized insurance plans.
- Fraud Detection: AI has been employed for fraud detection in healthcare, aiding insurance companies in saving costs.
- Population Health Management: AI-driven approaches are investigated for population health management, aiming to enhance the effectiveness of healthcare services and reduce overall expenses.

Governments and Public Health Organizations:

- Disease Surveillance: AI's role in disease surveillance and monitoring outbreaks has been acknowledged in the literature.
- Health Policy and Planning: The potential of AI to inform health policy and planning through data-driven insights has been discussed in the literature.

Caregivers and Family Members:

 Home Healthcare Devices: AI-driven home healthcare devices and monitoring systems have been explored to provide better care and support for caregivers and family members.

Ethical Considerations: The statement emphasizes the importance of addressing ethical, privacy, and security concerns associated with AI in healthcare, which is a common consideration discussed in the literature. Additionally, equitable access and addressing biases are recognized as important aspects to ensure the fair distribution of AI benefits.

In conclusion, while specific references are not provided, the statements align with the broader consensus in the peer-reviewed literature on the potential benefits of AI in healthcare across various stakeholders. Researchers interested in specific studies on these topics may refer to reputable journals in healthcare informatics, medical imaging, bioinformatics, and related fields.

Phind ProCoT Answer/Output: The statements provided are generally affirmative, as they align with the current understanding of how AI can benefit various stakeholders in the field of healthcare. However, it's important to note that while AI has the potential to provide numerous benefits, it's crucial to address ethical, privacy, and security concerns to ensure that these technologies are used responsibly and for the benefit of all stakeholders in the healthcare ecosystem.

- (1) Patients: AI can indeed assist in faster and more accurate disease diagnosis, leading to earlier and more effective treatments. AI can also help in personalized medicine by tailoring treatment plans to individual patient profiles, increasing the likelihood of successful outcomes. AI-powered devices and apps can enable remote monitoring of health conditions, allowing patients to better manage chronic illnesses and receive timely interventions. AI can also improve access to health-care services, especially in underserved or remote areas, through telemedicine and virtual health assistants.¹
- (2) Healthcare Providers: AI can provide healthcare professionals with valuable in-

sights and recommendations, aiding in diagnosis and treatment decisions. AI can streamline administrative tasks, such as appointment scheduling and medical coding, reducing the administrative burden on healthcare staff. AI can predict disease outbreaks and patient needs, helping hospitals allocate resources more efficiently. Automation of repetitive tasks can reduce the burnout experienced by healthcare workers.³

- (3) Researchers and Drug Development: AI accelerates drug discovery by identifying potential drug candidates and predicting their efficacy. AI can analyze vast amounts of medical data to uncover patterns and insights that may lead to breakthroughs in medical research. AI can optimize patient recruitment for clinical trials and assist in monitoring trial data.³
- (4) Healthcare Payers and Insurance Companies: AI can help insurers assess risk more accurately, leading to more personalized and competitive insurance plans. AI can detect and prevent healthcare fraud, saving costs for insurance companies. AI can assist in managing the health of covered populations more effectively, reducing overall healthcare expenses.³
- (5) Governments and Public Health Organizations: AI can help in monitoring disease outbreaks, facilitating rapid responses to public health emergencies. AI can provide insights for policymakers to make data-driven decisions on healthcare infrastructure and resource allocation. AI-driven home healthcare devices and monitoring systems can help caregivers and family members provide better care and peace of mind for their loved ones.³
- (6) Caregivers and Family Members: AI can provide numerous benefits in healthcare, but it's important to address ethical, privacy, and security concerns to ensure that these technologies are used responsibly and for the benefit of all stakeholders in the healthcare ecosystem. Additionally, equitable access to AI-driven healthcare solutions and addressing potential biases are important considerations to ensure that the benefits of AI are distributed fairly.

Question 4 (Case 2):

Describe the two paradigms of using a pre-trained model in transfer learning: feature extraction and fine-tuning.

BingAI Answer/Output: Certainly! In the context of transfer learning, there are two primary paradigms for utilizing a pre-trained model:

Feature Extraction: In this approach, we leverage the representations learned by a previously trained network to extract meaningful features from new data. The process involves adding a new classifier (usually a fully connected layer) on top of the pretrained model. The pre-trained model's convolutional base (which contains generic feature maps) remains frozen during this step. By doing so, we can repurpose the feature maps learned previously for a different dataset without retraining the entire model. However, the final classification layer of the pre-trained model is specific to its original task and class labels. Example: Suppose we use a pre-trained model trained on a large-scale image classification task and add a new classifier for a specific set of classes (e.g., cats vs. dogs).

Fine-Tuning: Fine-tuning involves unfreezing a few of the top layers of the pretrained model's base. We then jointly train both the newly-added classifier layers and the last layers of the base model. The goal is to adapt the higher-order feature representations in the base model to make them more relevant for the specific task. Fine-tuning is particularly useful when we have sufficient labeled examples for the target task. Example: After feature extraction, we fine-tune the base model's top layers to improve its performance on the specific classification task.

In summary, feature extraction allows us to reuse learned features, while fine-tuning refines the model for a specific task by adjusting its higher-level representations.¹

ChatGPT ProCoT Answer/Output: The provided information accurately describes two common paradigms in transfer learning: feature extraction and fine-tuning. These approaches are widely employed to leverage pre-trained models for new tasks. The assertions made are supported by multiple references from peer-reviewed articles and books.

Feature extraction involves using a pre-trained model's convolutional base to extract meaningful features from new data. This process is well-documented in the literature. For instance, in the book "Deep Learning" by Ian Goodfellow et al. (2016), the authors discuss the concept of transfer learning and feature extraction in the context of convolutional neural networks (CNNs). The idea of freezing the convolutional base during feature extraction is consistent with the work of Razavian et al. (2014) in the paper "CNN Features Off-the-shelf: an Astounding Baseline for Recognition." The study explores using pre-trained CNNs for image classification tasks by extracting features from the convolutional layers. The example provided, using a pre-trained model for a large-scale image classification task and adding a new classifier for specific classes (e.g., cats vs. dogs), aligns with the practical application of feature extraction, as discussed by Yosinski et al. (2014) in "How transferable are features in deep neural networks?"

Fine-tuning, as described, involves unfreezing a few of the top layers of the pretrained model and jointly training both the new classifier layers and the last layers of the base model. This process is extensively discussed in the literature. For instance, in the paper "Visualizing and Understanding Convolutional Networks" by Zeiler and Fergus (2014), the authors explore fine-tuning strategies to improve the performance of pre-trained CNNs on specific tasks. The concept that fine-tuning is particularly useful when there are sufficient labeled examples for the target task is supported by the work of Donahue et al. (2014) in "Decaf: A Deep Convolutional Activation Feature for Generic Visual Recognition." The study demonstrates the effectiveness of fine-tuning with ample labeled examples for image classification.

In summary, the information provided accurately describes the feature extraction and fine-tuning paradigms in transfer learning, and the statements align with findings from various peer-reviewed sources. These paradigms offer practical strategies for utilizing pre-trained models and adapting them to specific tasks.

BingAI ProCoT Answer/Output: In the context of transfer learning, there are two primary paradigms for utilizing a pre-trained model:

Feature Extraction and Fine-Tuning. Feature Extraction involves leveraging the representations learned by a previously trained network to extract meaningful features from new data. The process involves adding a new classifier (usually a fully connected layer) on top of the pre-trained model. The pre-trained model's convolutional base (which contains generic feature maps) remains frozen during this step. By doing so, we can repurpose the feature maps learned previously for a different dataset without retraining the entire model. However, the final classification layer of the pre-trained model is specific to its original task and class labels. For example, suppose we use

a pre-trained model trained on a large-scale image classification task and add a new classifier for a specific set of classes (e.g., cats vs. dogs). 123

Fine-Tuning involves unfreezing a few of the top layers of the pre-trained model's base. We then jointly train both the newly-added classifier layers and the last layers of the base model. The goal is to adapt the higher-order feature representations in the base model to make them more relevant for the specific task. Fine-tuning is particularly useful when we have sufficient labeled examples for the target task. For example, after feature extraction, we fine-tune the base model's top layers to improve its performance on the specific classification task. ¹²³

In summary, feature extraction allows us to reuse learned features, while fine-tuning refines the model for a specific task by adjusting its higher-level representations. 123