Synthetic Datasets for Program Similarity Research

Alexander Interrante-Grant MIT Lincoln Laboratory Michael Wang

MIT Lincoln Laboratory

Lisa Baer
MIT Lincoln Laboratory

Ryan Whelan
MIT Lincoln Laboratory

Tim Leek
MIT Lincoln Laboratory

Abstract

Program similarity has become an increasingly popular area of research with various security applications such as plagiarism detection, author identification, and malware analysis [16]. However, program similarity research faces a few unique dataset quality problems in evaluating the effectiveness of novel approaches. First, few high-quality datasets for binary program similarity exist and are widely used in this domain. Second, there are potentially many different, disparate definitions of what makes one program "similar" to another and in many cases there is often a large semantic gap between the labels provided by a dataset and any useful notion of behavioral or semantic similarity.

In this paper, we present HELIX – a framework for generating large, synthetic program similarity datasets. We also introduce Blind HELIX, a tool built on top of HELIX for extracting HELIX components from library code automatically using program slicing. We evaluate HELIX and Blind HELIX by comparing the performance of program similarity tools on a HELIX dataset to a hand-crafted dataset built from multiple, disparate notions of program similarity. Using Blind HELIX, we show that HELIX can generate realistic and useful datasets of virtually infinite size for program similarity research with ground truth labels that embody practical notions of program similarity. Finally, we discuss the results and reason about relative tool ranking.

1 Introduction

Program similarity is a domain of research that covers a broad range of applications, including: bug search, malware clustering, malware detection, malware lineage, patch generation and analysis, porting information across program versions, and software theft detection [16]. Increasingly, researchers have relied on machine learning techniques as potential solutions to problems within the program similarity domain [36]. With the explosion in popularity of machine learning applications in this domain, high-quality datasets are more important

than ever to ensure that the community can reasonably and accurately gauge the performance of one approach versus another.

Unfortunately, high-quality datasets are difficult to find in the domain of binary program similarity [34]. Existing datasets often capture opaque notions of program similarity with questionable relevance to real-world problems. In the malware analysis domain specifically, prior research has found a large semantic gap between dataset labels and any useful notion of program similarity [34]. In other domains with comparable dataset availability and quality issues, researchers often turn to synthetic data generation and augmentation strategies with reasonable success [4, 10, 15, 19, 35, 39].

To combat the problem of poor dataset availability and quality, this paper describes our approach for generating synthetic program similarity datasets by slicing and recombining existing open-source libraries into samples with known, configurable ground truth similarity. We evaluate our approach against a manually-labeled dataset comprised of multiple abstract notions of program similarity.

The rest of this paper is organized as follows. First, Section 2 covers background information on existing program similarity approaches and includes a brief survey of dataset use in related work. Next, we describe our approach for generating synthetic program similarity datasets in Section 3. We then evaluate our approach in Section 4 and discuss our results and directions for future work in Section 5. Finally, we summarize related work in Section 6 and conclude in Section 7.

Our primary contributions are:

- To the best of our knowledge, we are the first to use a program slicing and re-assembly approach to generate synthetic datasets for program similarity research. Specifically, we combine slices of open-source library code to generate samples with ground truth similarity which is based in measurable program similarity.
- We present HELIX an open-source framework for program generation and mutation geared toward dataset generation for program similarity research that is generic

enough to support any programming language, compiler, and build system. HELIX is robust, mature, actively being maintained, and publicly available at https://github.com/helix-datasets/helix.

- We present Blind HELIX a tool built on top of HE-LIX that automatically extracts functional components from library code using program slicing. Blind HELIX is available at https://github.com/helix-datasets/ blind-helix.
- We evaluate our approach using a number of existing program similarity tools and demonstrate that the datasets generated align well with multiple abstract notions of program similarity. We also discuss the relative performance of each of these tools against different notions of program similarity.

2 Background

This section covers relevant background information before we describe our synthetic program similarity dataset generation approach. We start by discussing prior approaches to program similarity, then cover available datasets and their use by the community. Finally, we cover some grounding research in other domains on synthetic data generation.

2.1 Program Similarity

Haq et al. conducted a study of program similarity applications, techniques, and evaluation methodologies. They found that program similarity has been used for a wide range of applications, such as bug search, malware clustering, malware detection, malware lineage, patch generation and analysis, porting information across program versions, and software theft detection [16].

One of the simplest methods to determine program similarity is through byte-wise approximate matching, or so-called fuzzy hashing [17], of whole programs. However, a survey by Pagani et al. found that existing fuzzy hashing approaches are limited in the types of similarity they are able to measure and fairly minor changes in the complex binary executable format can induce large apparent dissimilarities when using fuzzy hashing [25].

In recent years, many more sophisticated approaches to program similarity have been applied to the problem of malware analysis involving applications of machine learning [36]. The quality and availability of datasets for program similarity is important for machine learning based approaches in particular which are unlikely to generalize if poor data are used for training. In the next section, we discuss existing datasets and cover a number of recent surveys which have questioned the quality and availability of datasets in this domain.

2.2 Dataset Availability and Use

Surveys

Perhaps the most popular application of program similarity is toward problems of malware analysis and security. Botacin et al. conducted a survey of malware research covering nearly 500 papers across major academic security conferences between the years of 2000 and 2018 [6]. They summarized what they observed to be ten major pitfalls and challenges in malware research, four of which directly relate to dataset use and availability. In particular, they noted that dataset suitability criteria for particular experiments are inconsistent, dataset representativity of realistic problems is generally poor, limited reproducibility stemming from private or underspecified dataset use is rampant, and dataset labeling, particularly labeling by antivirus labels or labels derived from antivirus labels, is often opaque and inconsistent.

A similar study focused exclusively on dataset availability and use across a broad range of digital forensic applications found similar issues in this domain [14]. In particular, of the over 700 papers they reviewed, they found that only 54.4% used datasets that already existed at the time of publication, with the remainder opting to produce their own dataset. They also mentioned issues with private dataset use and general availability. Another study of dataset availability in the domain of cybersecurity research found that only 21.2% of papers which create their own dataset make that dataset public [40].

It is clear that in order for the fields of computer security and digital forensics to mature, researchers need more and better standardized options for datasets across the community. Better dataset availability and more standardized dataset use would lead to much higher rates of reproducibility in our research, greater community confidence in novel research, and a much better understanding of the relative performance of comparable solutions.

Datasets

A list of commonly used datasets created specifically for program similarity and malware analysis research purposes is included in Table 1. These datasets were distilled from the above surveys as well as other recent work in program similarity and malware analysis.

2.3 Synthetic Dataset Generation

Synthetic datasets have become increasingly common across a wide range of research domains. In applications of deep learning especially, where dataset sizes must be very large to support training complex models, synthetic dataset use has become fairly common in domains such as computer vision, environmental simulation, bioinformatics, natural language processing, and more [23].

Name	Year	Туре	Labels	Available*
Malware Genome Project [41]	2012	Android Malware	Malware Families	Х
Drebin [3]	2014	Android Malware	Malware Families	✓
Malicia [21]	2013	Drive-by Download Malware	Malware Families	X
Microsoft Kaggle [28]	2015	Malware	Malware Families	✓
EMBER [2]	2017 (2018)	Malware	Benign/Malicious	✓
T5 [30]	2011	Non-Executable Files	Similarity	✓
MSX-13 [31]	2013	Microsoft Office Files	Similarity	✓

Table 1: Published datasets for program similarity and malware analysis research. *Publicly available for download at the time of publication of this work.

Numerous novel synthetic dataset generation strategies have been proposed in recent years across many domains. In research involving healthcare data, synthetic data generation strategies have been proposed to avoid the many privacy pitfalls involved with real medical data [4, 10, 39]. Synthetic dataset generation is also common in the domain of computer vision for tasks such as text recognition and general data augmentation [15, 19, 35]. In the realm of security, synthetic dataset generation has even been proposed for evaluating security software [33] and for fuzzing [11].

Multiple recent studies have evaluated the effectiveness of synthetic data across many domains and applications and have found it to be an effective tool for research [5, 18]. Patki et al. even designed and implemented the first generalized generative model for building synthetic datasets in arbitrary domains [26].

3 Approach

In order to generate synthetic datasets for program similarity, we implement a framework for combining small, labeled pieces of reusable, parameterized implementations of specific program functionality - referred to here as components. We then automatically harvest a large corpus of components from existing open-source libraries using program slicing. Finally, by generating samples which contain different combinations of components, we are able to create synthetic datasets of programs which have known similarity based on the components they share. In the next section, we describe the HELIX framework we implemented for synthetic dataset generation.

3.1 The HELIX Framework

At its core, the HELIX framework defines three major primitives:

Blueprints Core project layouts including templated boilerplate and methods for generating and building artifacts from a set of Components and Transforms. For example, a C++ project build with CMake. **Components** Small, configurable pieces of source code that represent a specific implementation of a specific functionality along with associated metadata. For example, a specific implementation of downloading a file from a given URL using the cURL library.

Transforms Modifications of either source code or a built artifact along with associated metadata. For example, the GNU Binutil strip which removes debugging symbols from a compiled binary.

These core primitives are depicted in Figure 1. Both components and transforms are labeled with tags indicating functionality and all tags associated with included components and transforms are aggregated as the ground truth labels for a sample in a generated dataset. Pairwise sample similarity can be computed as a function of the sets of ground truth tags for each sample.

For the purposes of this work we make use of components and HELIX's built in CMakeCppBlueprint to build samples from both C and C++ source code. We do not make use of transforms but their description is included here for completeness. The HELIX framework itself is robust and flexible and capable of generating realistic programs that accomplish meaningful tasks under dynamic analysis by combining parameterized components in interesting ways. It also supports a uniform interface for applying transformations and obfuscations to code and is generic enough to support practically any programming language and build system.

In the next section, we describe our approach for automatically extracting HELIX components from existing library source code which allows us to generate arbitrarily large datasets with HELIX using a tool built on top of HELIX that we call Blind HELIX.

3.2 Blind HELIX

While HELIX includes a small number of hand-written components, on their own they are not enough to generate any sizable dataset and are primarily included for demonstration purposes. Indeed, manually writing enough components for

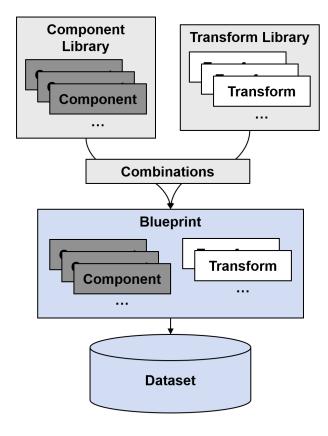


Figure 1: The design of HELIX - sets of components and transforms are combined using a blueprint to generate samples in a synthetic dataset.

HELIX to support large-scale dataset generation is simply too much work for a small team of researchers. Instead, we developed and implemented an approach for automatically extracting HELIX components from existing open-source libraries using program slicing.

Program slicing is an approach to divide a program into a minimal form that still produces a desired behavior. It begins by selecting some desired behavior and then removing code which does not influence that behavior based on code and dataflow analysis [38]. Program slicing has been used in a number of different areas of program analysis, including debugging, program comprehension, software maintenance, and software testing [22].

We implemented a program slicing approach to automatically extract HELIX components from existing libraries, which we refer to as Blind HELIX. Blind HELIX's design is depicted in Figure 2 and it is built on top of the HELIX framework. Given a software library, Blind HELIX uses the following procedure to extract HELIX components:

- Parse the library metadata, identifying all exported functions.
- For each exported function, attempt to build a binary which includes that function and statically links against the target library. Link-time optimization is enabled so that the linker handles slicing the library during a dead code elimination pass.
- 3. Exported functions which fail to build are discarded.
- 4. A component is created for each successful build of an export. The built binary is parsed and label tag added to the component for the name of each included function.
- 5. The original library is packaged with all successfully identified and labeled components and exported for later use. The library is rewritten to rename all function symbols to avoid potential name collisions when linking with multiple Blind HELIX components.

Note that program slicing is handled automatically by the compiler in step 2. By statically linking against a target library and only importing a single function with link-time optimization enabled, a dead code elimination pass removes unused functions and global data from the library. This leaves only the minimal "slice" of the program responsible for that export's functionality.

Blind HELIX supports ELF libraries on Linux written in C but the approach is generic enough to apply to Windows PEs and libraries written in C++.

A Corpus of Libraries

We used VCPKG¹ - a C and C++ package manager for acquiring and managing libraries developed by Microsoft. VCPKG

¹VCPKG. https://vcpkg.io/en/index.html.




Figure 2: Blind HELIX's use of program slicing - a slice is taken starting at each exported function in the library to generate a single HELIX component.

supports libraries on Linux and Windows and is capable of downloading libraries automatically and building them from source on any platform it supports. As of the writing of this paper, VCPKG includes over 1,700 open-source libraries and Blind HELIX integrates with it directly to download and build target libraries for component extraction.

After downloading and building every library supported by VCPKG, we used Blind HELIX to extract components from compatible libraries written in C. We were able to extract 28,178 unique components from 268 different libraries.

Labeling and Similarity

In order to label individual components, we identified the set of functions included in a given component's slice using the debugging symbols provided by the library to which the component belongs. These function names make up a set of component labels L_c of strings in the form library_name>-<function_name> (e.g., zlib-inflate).

The set of labels for a particular sample L_s built with n components is simply the union of the sets of lables in each component, as depicted in Equation 1.

$$L_s = \bigcup_{i=1}^n L_{c,i} \tag{1}$$

To approximate the similarity between any two samples, we can take the Jaccard similarity of their sets of labels as depicted in Equation 2.

$$S(L_{s1}, L_{s2}) = \frac{|L_{s1} \cap L_{s2}|}{|L_{s1} \cup L_{s2}|}$$
 (2)

3.3 Dataset Generation

There are a few potential pitfalls with naively combining extracted components from the VCPKG libraries to generate datasets. First, some of the extracted components are fundamentally incompatible with others and combinations including both will fail to build. Despite library symbol renaming to avoid link-time collisions, some inherent incompatibilities are unavoidable and intrinsic to how the libraries themselves were written. To combat this, when generating datasets from Blind HELIX components we simply attempt to generate more than necessary and accept some loss due to build failures.

Second, randomly selecting included components from the corpus of available components gives very little control over the distribution of ground truth similarities in the generated dataset. This can be problematic if the dataset generated is biased toward either extremely low or extremely high similarity, since metrics which are also biased will perform unreasonably well when evaluated against the dataset.

Finally, including more than one component from a single library in a single build may lead to inflated levels of similarity not reflected in the sample labels due to unintended function subgraph overlap captured when slicing the library. To combat these issues, we implemented the following library-stratified semi-random dataset generation strategy:

- 1. Randomly select a list of *n* libraries, where *n* is the number of components to include in each sample.
- 2. Randomly select a slice component from each selected library.
- 3. Generate a sample from the list of selected components.
- 4. Randomly replace a random number of the selected components between zero and n * p, where p is a parameter that controls the over degree of similarity in the generated dataset between zero and one. Components are replaced in the same manner as 1 and 2, randomly selecting a replacement library and then randomly selecting a slice component from that library.
- 5. Repeat steps 3 and 4, discarding samples which fail to build, until the desired number of samples is reached.

Using this strategy, and given that we were able to extract 28,178 unique components from 268 different libraries, this approach can generate dataset sizes which are, for all practical purposes, infinite².

²Assuming 50 components per sample, $\binom{268}{50} = 6.36 \times 10^{54}$ is a lower bound on the possible number of samples that can be generated from VCPKG components.

4 Evaluation

We evaluated Blind HELIX using a number of widely used program similarity tools in the domain of malware analysis. We curated a dataset of programs encompassing multiple, disparate notions of program similarity and manually labeled the similarity between pairs of programs in the dataset. Finally, we generated a synthetic dataset of 256 programs (32,640 distinct pairs) using Blind HELIX and compared the relative ranking of program similarity tool performance on the two datasets. In the next section, we describe each of the program similarity tools in detail.

4.1 Program Similarity Tools

We selected five popular program similarity tools to use for this evaluation: ssdeep, sdhash, the Trend Micro Locality-Sensitive Hash (TLSH), Lempel-Ziv Jaccard Distance (LZJD) [20,24,27,29], and BinDiff³.

ssdeep uses context-triggered piecewise hashing (CTPH) to generate locality-sensitive fuzzy hashes for full files. Hashes that do not match exactly are compared by computing a weighted edit distance between them to produce a score between zero and one [20]. While originally designed for assessing text similarity in an email spam filter algorithm, ssdeep hashes are now commonly used for malware analysis and are featured on VirusTotal⁴.

sdhash uses statically improbable byte sequences to generate hashes based on empirical measurement of entropy in a dataset of various file types. Hashes are compared by measuring their similarity as Bloom filters to produce a score between zero and one [29].

TLSH uses a byte-wise sliding window approach to generate hashes, comparing them by rough edit distance to produce an unbounded⁵ score where zero indicates that two files are identical and higher values indicate lower similarity [24].

LZJD uses the Lempel-Ziv technique for creating a compression dictionary of previously-seen sub-sequences. They then use min-hashing as an optimization on Jaccard distance between the sub-sequences of bytes for two files to compute a similarity score between zero and one [27].

BinDiff uses a large number of weighted similarity metrics based on structural features of the code as well as features of the program's call graph aggregated across the disassembly of the full program to generate a similarity score between zero and one [12,13]. BinDiff differs from the previous metrics in that it only works on executable files, not arbitrary blobs of data, but it is the de facto standard for malware analysis and comparison.

We ran each of these program similarity metrics on every pair of programs in the evaluation datasets and compared relative performance to the ground truth similarity value for that pair. In the next section, we describe the datasets these tools were evaluated against.

4.2 Dataset

In order to evaluate the quality of the datasets HELIX (and Blind HELIX) are able to generate, we curated samples that represent the following abstract notions of program similarity:

Versions Different versions of the same source code. Samples are binaries from GNU coreutils compiled from the source code versions released many years apart.

Optimizations Different compilers and optimization levels applied to the same source code. Samples are binaries from GNU coreutils and findutils compiled with GCC and Clang at different optimization levels.

Obfuscations Different obfuscation techniques applied to the same source code. Samples are example programs from the Android Native Development Kit (NDK)⁶ compiled with various combinations of obfuscations from the Obfuscator LLVM (OLLVM) compiler.

Semantic Different source code that accomplishes the same purpose. Samples are selected from the Google Code Jam (GCJ)⁷ programming competition as solutions from different authors to the same challenge problem.

Malware Real-world malware from the same malware family. Samples include different versions of components in the CosmicDuke malware family labeled by compilation timestamp and originally identified by F-Secure [1].

The selected categories represent real notions of program similarity toward which many applications of program similarity are targeted. Pairs of samples in each category were compared and given a score between zero and one by multiple analysts familiar with program similarity and program analysis. Analysts were given source code where applicable and disassembly otherwise. The scores given by each analyst were then averaged to give the ground truth similarity labels for the dataset. The full table of manually-labeled samples is included in Appendix A and the full dataset is included with Blind HELIX at https://github.com/helix-datasets/blind-helix.

We then generated a separate dataset using HELIX for comparison, consisting of 256 samples for a total of 32,640 pairs.

³Zynamics BinDiff. https://www.zynamics.com/bindiff.html.

⁴VirusTotal. https://www.virustotal.com/.

⁵For the purposes of this analysis, we normalize TLSH scores between zero and one by selecting optimal score bounds using the detection and false positive rates from the original paper.

⁶Android Native Development Kit. https://developer.android.com/ndk.

⁷Google Code Jam. https://codingcompetitions.withgoogle.com/codejam.




Figure 3: Distribution of ground truth similarity scores in the HELIX-generated dataset. The dataset was generated such that there would not be an unreasonable abundance of low-similarity or high-similarity scores to avoid benefiting biased similarity metrics.

Samples were generated using components automatically extracted from open source libraries in VCPKG using Blind HELIX. The distribution of ground truth similarity values in the HELIX dataset is depicted in Figure 3. Generating this dataset took 2 minutes and 29 seconds running on an Intel Xeon 8253 CPU with 64GB of RAM and dataset generation performance scales linearly with dataset size.

In summary, we have two distinct datasets on which to evaluate program similarity tools:

- A dataset of manually-labeled samples encompassing five different abstract notions of program similarity. Summarized in Appendix A. Referred to as the "manuallylabeled dataset" for the remainder of this paper.
- A dataset generated with HELIX from Blind HELIX components harvested from VCPKG consisting of 256 samples (32,640 pairs). Referred to as the "Blind HELIX dataset" or the "HELIX dataset" for the remainder of this paper.

Experiment

Using our five program similarity tools we computed pairwise similarity scores across both the manually-labeled and Blind HELIX datasets. We measured the output of each of the tools against the ground truth similarity values provided for each dataset by computing the mean absolute error (MAE) across all pairwise comparisons. In the next section, we explain our results and explore some specific examples of interesting performance by the similarity metrics.




Figure 4: Program similarity metric performance on the Blind HELIX and manually-labeled datasets - lower is better.

4.3 Results and Analysis

The performance of each of the five program similarity tools is depicted in Figure 4. On the manually-labeled dataset the worst performing metric is ssdeep very closely followed by sdhash. LZJD and TLSH perform a bit better and fairly comparably to one another. Finally, BinDiff performs the best by a fairly large margin. The relative program similarity tool rankings are essentially the same on the Blind HELIX dataset with ssdeep and sdhash performing the worst, followed by LZJD and TLSH which perform fairly comparably to one another, and finally BinDiff again performs the best. The only difference between the relative ranking of the tools compared across both datasets is the position of LZJD and TLSH which are very close in performance - within 0.02 MAE of each other on both datasets.

From this similar performance ranking of program similarity tools we postulate that Blind HELIX datasets embody the same notions of program similarity represented by the manually-labeled dataset. In other words, datasets generated by Blind HELIX correctly model realistic and useful notions of program similarity and can be a useful tool for evaluating the effectiveness of new program similarity approaches.

Manually-Labeled Dataset Performance

The comparative performance of each of the five program similarity tools on individual categories of program similarity within the manually-labeled dataset is depicted in Figure 5. There are a few interesting insights we can draw about each of the tools from the results on this dataset.

First, while LZJD and TLSH perform relatively comparably in the context of the entire dataset, LZJD appears to be better suited to identifying semantic similarity while TLSH

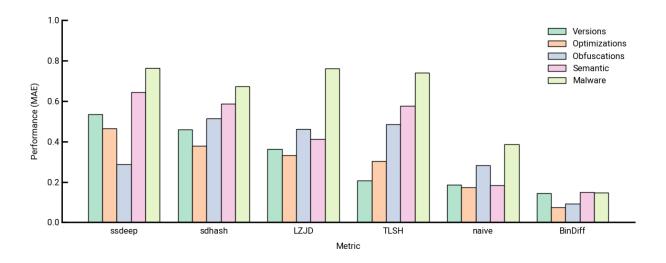


Figure 5: Comparative program similarity metric performance on manually-labeled dataset similarity categories - lower is better. The "naive" metric represents always guessing a similarity of 0.5.

seems better suited to identifying similarities across different versions of software. This could be because TLSH's quartile computation leads it to perform well against data that varies significantly in only a few places. Differing versions of large programs are likely to only have modifications or additions to a few functions resulting in localized changes, while semantically similar programs built from differing source code are likely to have a diffuse, low level of dissimilarity throughout.

Second, BinDiff appears to perform somewhat better on optimizations and obfuscations than other categories. This could be due to its focus on call graph comparison and aggregation of basic block level similarity, thus it is optimized to find similarities in call graph structure and basic units of functionality. These would likely be preserved by a compiler or an obfuscator which must necessarily preserve program functionality. In contrast, it performs the worst on semantic similarity where individual basic blocks, call graph structure, and data flow may vary significantly between samples while functionality is preserved.

Finally, it's worth noting that metrics like ssdeep and sdhash are primarily designed to discover similarities between nearly identical files and were originally built for comparing textual data, not complex binary formats consisting of a mix of metadata and machine code with no specific alignment. Indeed, across the entire manually-labeled dataset, ssdeep reports a similarity value of zero for 93.4% of pairs. As a point of comparison, Figure 5 includes a "naive" metric that simply always predicts a similarity value of 0.5. This metric is obviously useless and outperforms nearly all of the program similarity tools yet these tools remain widely used for program similarity.




Figure 6: Program similarity metric performance on CosmicDuke malware samples by sample category - lower is better.

Case Study: Malware Samples

With the exception of BinDiff, all metrics exhibited the weakest performance on the malware category of similarity. This portion of the dataset consisted of malware samples from the family CosmicDuke as reported by F-Secure. These samples catalog the development of a dropper and a loader component of the CosmicDuke malware family over time and are differentiated by their compilation timestamps in the original report. For samples belonging to the dropper component of CosmicDuke, the executable code is actually identical and the compilation timestamps match; the only difference between these samples is binary metadata designed to trick the target into running the malware.

Manual analysts were able to easily identify the identical programs and gave them a very high ground truth similarity in our manually-labeled dataset but, as depicted in Figure 6, BinDiff was the only metric that was able to identify and properly weight the importance of this similarity. This is likely because the other metrics operate on raw bytes, native of the binary executable format and so overweighted the importance of the program metadata in identifying similarities between samples.

5 Discussion and Future Work

In this section, we discuss the results of our evaluation, some limitations, and describe some directions for future work.

Limitations

As of the writing of this paper, HELIX only includes a relatively small number of hand-written components. Blind HE-LIX is one solution to creating a large number of HELIX components for dataset generation but has a few limitations. First, Blind HELIX currently only supports libraries written in C for Linux, but could feasibly be extended to support C++ and Windows. Second, Blind HELIX labels are not based on program functionality, just a rough approximation of it through included functions in the library slice subgraph. For the same reason, when Blind HELIX components call their exported library function they are not passed reasonable or realistic function arguments. If executed, samples built with Blind HELIX would mostly likely crash immediately. HE-LIX is actively maintained and we invite community input and contribution of additional components and tools built on top of HELIX that improve upon Blind HELIX's automated component extraction.

Classification Datasets

In this work, we focused on generating samples for program similarity using HELIX and Blind HELIX. However, the HELIX framework is flexible enough to be used for more complex classification dataset generation to aid in research applying machine learning to program analysis. Given that, with Blind HELIX, we can generate two programs with arbitrary levels of similarity, it should be possible to generate synthetic "classes" of programs with configurable statistical distribution parameters to suit the needs of any particular evaluation. We leave this to future work.

Dynamic Analysis

As mentioned before, samples generated from Blind HELIX components are not guaranteed to function when executed

and would mostly likely crash. This makes Blind HELIX datasets somewhat useless for applications of dynamic analysis, however this limitation does not apply to the core HELIX framework. HELIX itself includes a number of components that accomplish interesting and useful functions all labeled according to the MITRE ATT&CK framework⁸. Unfortunately these hand-written components take time and resources to develop and so only a relatively small number exist as of the writing of this paper. Hopefully a community effort to contribute functional, well-labeled components will improve HELIX's dynamic analysis dataset generation capabilities in the future.

6 Related Work

There is some related work in the area of automated evaluation of similarity techniques. Breitinger et al. built a framework to test algorithms of similarity matching (or FRASH, for short) which takes as input a test file or files and mutates those files as input data to evaluate the performance of the ssdeep and sdhash tools [8]. HELIX allows users to create raw datasets which can be used for program similarity research and is not restricted to evaluating only ssdeep and sdhash. Additionally, the mutations performed by FRASH do not guarantee that test cases will still be functional executables. Breitinger et al. improve on FRASH in [7], automatically approximating similarity of real-world data by using longest common subsequence approximation. Their evaluation was conducted on non-executable file formats (images, html, PDFs, etc.), however, and it's not clear that this approach would directly apply to much more complex binary executable file formats.

In the domain of malware analysis, multiple similarity assessment frameworks have been proposed. Upchurch et al. proposed a framework for malware similarity testing entitled Variant [37]. Variant, however, consists of a single static dataset composed of only 85 samples of malware manually analyzed and grouped by subject matter experts. Although HELIX's samples are synthetic, not real-world malware, HE-LIX is capable of generating much larger datasets with highquality ground truth labels based on real program similarity. Liang et al. extracted call traces from malware executions and proposed a method of winnowing a large dataset into one which could be used as a benchmark. Their approach is purely focused on dynamic analysis and labels samples based on a "maliciousness index" computed via a voting system of antivirus labels. Sebastián et al. proposed a method of automatically labeling real-world malware by resolving discrepancies between the labels provided by different antivirus vendors for the same sample [32]. However, unlike HELIX, antivirus labels are largely opaque and rarely connected to any real notion of semantic, structural, or behavioral similarity.

Toward automated program variant generation, Choi et al.

⁸MITRE ATT&CK. https://attack.mitre.org/.

proposed a system for applying non-behavior-modifying transformations to source code repeatedly, guided by a genetic algorithm until a specified level of diversity is achieved. This work takes the opposite approach to ours and produces many diverse samples from a single piece of source code [9]. Their adaptive malware variant generation (AMVG) framework is presented as a proof of concept and not designed for dataset generation, though it may be interesting to apply some of their genetic algorithm approach to HELIX in future work.

7 Conclusion

Dataset quality and general availability is a major problem in the domain of program similarity research. In this work, we have demonstrated a practical approach for generating synthetic program similarity datasets from existing library code using program slicing and recombination that is capable of generating practically infinitely sized datasets. In our evaluation, we have shown that our approach correctly models realistic and useful notions of program similarity. Finally, we have open-sourced our framework for program generation and mutation (HELIX) and our tool for automatic extraction of functional components from existing libraries (Blind HELIX).

Acknowledgements

We would like to thank all of our colleagues at MIT Lincoln Laboratory that have contributed to the conception and development of this work along the way.

This material is based upon work supported by the Department of Defense under Air Force Contract No. FA8721-05-C-0002 and/or FA8702-15-D-0001. Any opinions, findings, conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Department of Defense.

Availability

HELIX (the program generation/mutation framework) was developed for this research and is publicly available at https://github.com/helix-datasets/helix. Blind HELIX (the tool to automatically extract HELIX components from library code using program slicing) is also publicly available at https://github.com/helix-datasets/blind-helix. The small, manually-labeled evaluation dataset, as well as the source code for all scripts used for evaluation are available in the Blind HELIX repository⁹.

References

[1] CosmicDuke: Cosmu with a twist of MiniDuke. Technical report, F-Secure Labs, 2014.

- [2] Hyrum S. Anderson and Phil Roth. Ember: An open dataset for training static pe malware machine learning models. *arXiv e-prints*, 2018.
- [3] Daniel Arp, Michael Spreitzenbarth, Malte Hubner, Hugo Gascon, Konrad Rieck, and CERT Siemens. Drebin: Effective and explainable detection of android malware in your pocket. In *Ndss*, volume 14, pages 23–26, 2014.
- [4] Laura Aviñó, Matteo Ruffini, and Ricard Gavaldà. Generating synthetic but plausible healthcare record datasets. *arXiv preprint arXiv:1807.01514*, 2018.
- [5] Anat Reiner Benaim, Ronit Almog, Yuri Gorelik, Irit Hochberg, Laila Nassar, Tanya Mashiach, Mogher Khamaisi, Yael Lurie, Zaher S Azzam, Johad Khoury, et al. Analyzing medical research results based on synthetic data and their relation to real data results: systematic comparison from five observational studies. *JMIR* medical informatics, 8(2):e16492, 2020.
- [6] Marcus Botacin, Fabricio Ceschin, Ruimin Sun, Daniela Oliveira, and André Grégio. Challenges and pitfalls in malware research. *Computers & Security*, 106:102287, 2021.
- [7] Frank Breitinger and Vassil Roussev. Automated evaluation of approximate matching algorithms on real data. In *Digital Investigation*, volume 11, pages S10–S17, 2014.
- [8] Frank Breitinger, Georgios Stivaktakis, and Harald Baier. Frash: A framework to test algorithms of similarity hashing. In *Digital Investigation*, volume 10, pages S50–S58, 2013.
- [9] Jusop Choi, Dongsoon Shin, Hyoungshick Kim, Jason Seotis, and Jin B Hong. Amvg: Adaptive malware variant generation framework using machine learning. In 2019 IEEE 24th Pacific Rim International Symposium on Dependable Computing (PRDC), pages 246–24609, 2019.
- [10] Saloni Dash, Ritik Dutta, Isabelle Guyon, Adrien Pavao, Andrew Yale, and Kristin P Bennett. Synthetic event time series health data generation. *arXiv preprint arXiv:1911.06411*, 2019.
- [11] Brendan Dolan-Gavitt, Patrick Hulin, Engin Kirda, Tim Leek, Andrea Mambretti, Wil Robertson, Frederick Ulrich, and Ryan Whelan. Lava: Large-scale automated vulnerability addition. In 2016 IEEE Symposium on Security and Privacy (SP), pages 110–121. IEEE, 2016.
- [12] Thomas Dullien and Rolf Rolles. Graph-based comparison of executable objects. 2005.

⁹Malware samples are included by hash only.

- [13] Halvar Flake. Structural comparison of executable objects. 2004.
- [14] Cinthya Grajeda, Frank Breitinger, and Ibrahim Baggili. Availability of datasets for digital forensics—and what is missing. *Digital Investigation*, 22:S94—S105, 2017.
- [15] Ankush Gupta, Andrea Vedaldi, and Andrew Zisserman. Synthetic data for text localisation in natural images. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2315–2324, 2016.
- [16] Irfan Ul Haq and Juan Caballero. A survey of binary code similarity. *arXiv preprint arXiv:1909.11424*, 2019.
- [17] Vikram S Harichandran, Frank Breitinger, and Ibrahim Baggili. Bytewise approximate matching: the good, the bad, and the unknown. *Journal of Digital Forensics, Security and Law*, 11(2):4, 2016.
- [18] Markus Hittmeir, Andreas Ekelhart, and Rudolf Mayer. On the utility of synthetic data: An empirical evaluation on machine learning tasks. In *Proceedings of the 14th International Conference on Availability, Reliability and Security*, pages 1–6, 2019.
- [19] Max Jaderberg, Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman. Synthetic data and artificial neural networks for natural scene text recognition. *arXiv* preprint arXiv:1406.2227, 2014.
- [20] Jesse Kornblum. Identifying almost identical files using context triggered piecewise hashing. In *Proceedings* of the 6th Annual Digital Forensic Research Workshop (DFRWS '06), pages 91–97, 2006.
- [21] Antonio Nappa, M Zubair Rafique, and Juan Caballero. Driving in the cloud: An analysis of drive-by download operations and abuse reporting. In *International Con*ference on Detection of Intrusions and Malware, and Vulnerability Assessment, pages 1–20. Springer, 2013.
- [22] Amir Ngah and Siti Aminah Selamat. A brief survey of program slicing. In *International Symposium* on *Research in Innovation and Sustainability 2014* (*ISoRIS'14*), pages 1467–1470. Citeseer, 2014.
- [23] Sergey I Nikolenko et al. Synthetic data for deep learning. *arXiv preprint arXiv:1909.11512*, 3, 2019.
- [24] Jonathan Oliver, Chun Cheng, and Yanggui Chen. TLSH a locality sensitive hash. *4th Cybercrime and Trustworthy Computing Workshop*, 2013.
- [25] Fabio Pagani, Matteo Dell'Amico, and Davide Balzarotti. Beyond precision and recall: understanding uses (and misuses) of similarity hashes in binary analysis. In *Proceedings of the Eighth ACM Conference*

- on Data and Application Security and Privacy, pages 354–365, 2018.
- [26] Neha Patki, Roy Wedge, and Kalyan Veeramachaneni. The synthetic data vault. In 2016 IEEE International Conference on Data Science and Advanced Analytics (DSAA), pages 399–410. IEEE, 2016.
- [27] Edward Raff and Charles Nicolas. An alternative to ncd for large sequences, lempel-ziv jaccard distance. In Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, pages 1007–1015, 2017.
- [28] Royi Ronan, Marian Radu, Corina Feuerstein, Elad Yom-Tov, and Mansour Ahmadi. Microsoft malware classification challenge. *arXiv e-prints*, 2018.
- [29] Vassil Roussev. Data fingerprinting with similarity digests. In K. Chow and S. Shenoi, editors, *Research Advances in Digital Forensics VI*, pages 207–226. Springer, 2010.
- [30] Vassil Roussev. An evaluation of forensic similarity hashes. *digital investigation*, 8:S34–S41, 2011.
- [31] Vassil Roussev and Candice Quates. File fragment encoding classification—an empirical approach. *Digital Investigation*, 10:S69–S77, 2013.
- [32] Marcos Sebastián, Richard Rivera, Platon Kotzias, and Juan Caballero. AVClass: A tool for massive malware labeling. In *International symposium on research in attacks, intrusions, and defenses*, pages 230–253. Springer, 2016.
- [33] Florian Skopik, Giuseppe Settanni, Roman Fiedler, and Ivo Friedberg. Semi-synthetic data set generation for security software evaluation. In 2014 Twelfth Annual International Conference on Privacy, Security and Trust, pages 156–163. IEEE, 2014.
- [34] Michael R. Smith, Nicolas T. Johnson, Joe B. Ingram, Armida J. Carbajal, Bridget I. Haus, Eva Domscot, Ramyaa Ramyaa, Christopher C. Lamb, Stephen J. Verzi, and W. Philip Kegelmeyer. Mind the gap: On bridging the semantic gap between machine learning and malware analysis. In *Proceedings of the 13th ACM Workshop on Artificial Intelligence and Security (AISec 2020)*, pages 49–60, 2020.
- [35] Jonathan Tremblay, Aayush Prakash, David Acuna, Mark Brophy, Varun Jampani, Cem Anil, Thang To, Eric Cameracci, Shaad Boochoon, and Stan Birchfield. Training deep networks with synthetic data: Bridging the reality gap by domain randomization. In *Proceedings of the IEEE conference on computer vision and pattern recognition workshops*, pages 969–977, 2018.

- [36] Daniele Ucci, Leonardo Aniello, and Roberto Baldoni. Survey of machine learning techniques for malware analysis. *Computers & Security*, 81:123–147, 2019.
- [37] Jason Upchurch and Xiaobo Zhou. Variant: a malware similarity testing framework. In 2015 10th International Conference on Malicious and Unwanted Software (MALWARE), pages 31–39, 2015.
- [38] Mark Weiser. Program slicing. In *Proceedings of the* 5th international conference on Software Engineering (ICSE '81), pages 43–53, 1981.
- [39] Andrew Yale, Saloni Dash, Ritik Dutta, Isabelle Guyon, Adrien Pavao, and Kristin Bennett. Privacy preserving synthetic health data. In *ESANN 2019-European Symposium on Artificial Neural Networks, Computational Intelligence and Machine Learning*, 2019.
- [40] Muwei Zheng, Hannah Robbins, Zimo Chai, Prakash Thapa, and Tyler Moore. Cybersecurity research datasets: taxonomy and empirical analysis. In 11th USENIX Workshop on Cyber Security Experimentation and Test (CSET 18), 2018.
- [41] Yajin Zhou and Xuxian Jiang. Dissecting android malware: Characterization and evolution. In 2012 IEEE symposium on security and privacy, pages 95–109. IEEE, 2012.

A Manually-Labeled Dataset Makeup

The manually labeled dataset samples are included in Tables 2, 3, 4, 5, and 6.

Category	Class(s)	Description	Sample(s)
Versions	base64, du, ls, mv	GNU Coreutils version 6.12 released in 2008	v6.12
		GNU Coreutils version 7.6 released in 2009	v7.6
		GNU Coreutils version 8.32 released in 2020	v8.32
		GNU Coreutils version 9.0 released in 2021	v9.0

Table 2: Manually-labeled samples of different versions of the same program.

Category	Class(s)	Description	Sample(s)
Optimizations	base64, du, ls, find	GNU Coreutils compiled with GCC at O0	GCC O0
		GNU Coreutils compiled with GCC at O1	GCC O1
		GNU Coreutils compiled with GCC at O2	GCC O2
		GNU Coreutils compiled with GCC at O3	GCC O3
		GNU Coreutils compiled with GCC at Of	GCC Of
		GNU Coreutils compiled with GCC at Os	GCC Os
		GNU Coreutils compiled with Clang at O0	Clang O0
		GNU Coreutils compiled with Clang at O2	Clang O2
		GNU Coreutils compiled with Clang at Of	Clang Of

Table 3: Manually-labeled samples of the same code compiled with different optimization levels and compilers.

Category	Class(s)	Description	Sample(s)
Obfuscations	ollvm-ndk-native-plasma	Renders a plasma effect in a bitmap in C	unobf, fla, bcf, fla+bcf+sub
	ollvm-ndk-camera-texture-view	Preview NDK camera image	unobf, fla
	ollvm-ndk-endless-tunnel	A simple game implemented in native code	unobf, sub, fla, sub+fla
	ollvm-ndk-webp-view	Decode and rotate WebP images	unobf, sub, fla, sub+fla

Table 4: Manually-labeled samples of different obfuscations of the same source code.

Category	Class(s)	Description	Sample(s)
Semantic	theme-park	GCJ 2010 Qualification	Ferlon, johny500, Prahadeesh, Suyog, Tommalla
	perfect-game	GCJ 2012 Round 3	Aleksei, iPeter, Xhark, yangzhe1991, ytau
	nile	GCJ 2014 Round 2	bwps, daimi89, LeeSin, Mosa
	recalculating	"GCJ 2020 Round 3	betrue12, Bodo171, MicGor, minQZ, walnutwaldo20

Table 5: Manually-labeled samples of different semantically equivalent programs with different source code.

Category	Class(s)	Description	Sample(s)
Malware	cosmicduke-loader	CosmicDuke loader	20120727-764add69922342b8c4200d64652fbee1376adf1c
			20121113-4e3c9d7eb8302739e6931a3b5b605efe8f211e51
			20121113-580eca9e36dcd1a2deb9075bcae90afee46aace2
			20121113-5c5ec0b5112a74a95edc23ef093792eb3698320e
			20121113-ccb29875222527af4e58b9dd8994c3c7ef617fd8
			20121204-9700c8a41a929449cfba6567a648e9c5e4a14e70
			20140418-fecdba1d903a51499a3953b4df1d850fbd5438bd
Malware	cosmicduke-dropper	CosmicDuke dropper	0e5f55676e01d8e41d77cdc43489da8381b68086
			5a199a75411047903b7ba7851bf705ec545f6da9
			7631f1db92e61504596790057ce674ee90570755
			f621ec1b363e13dd60474fcfab374b8570ede4de

Table 6: Manually-labeled samples of malware from the same family.